




1. SET POSTS ALONG CONTOUR OF THE LAND AND EXCAVATE TRENCH UPSLOPE ALONG THE LINE OF POSTS.

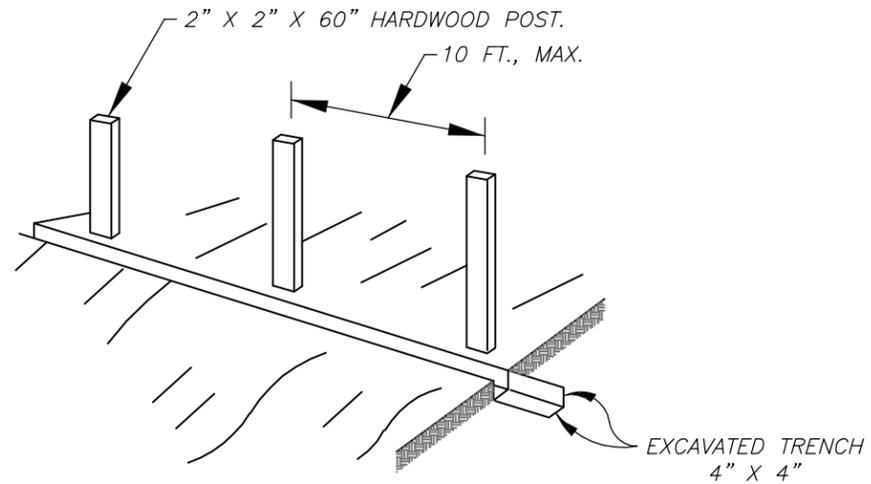

2. ATTACH THE FILTER FABRIC TO THE FENCE POSTS AND EXTEND IT INTO THE DITCH.

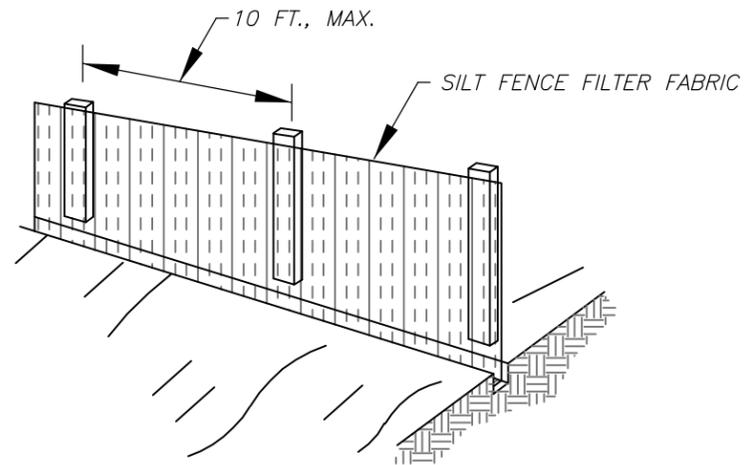

3. BACKFILL AND COMPACT THE TRENCH WITH EXCAVATED SOILS.

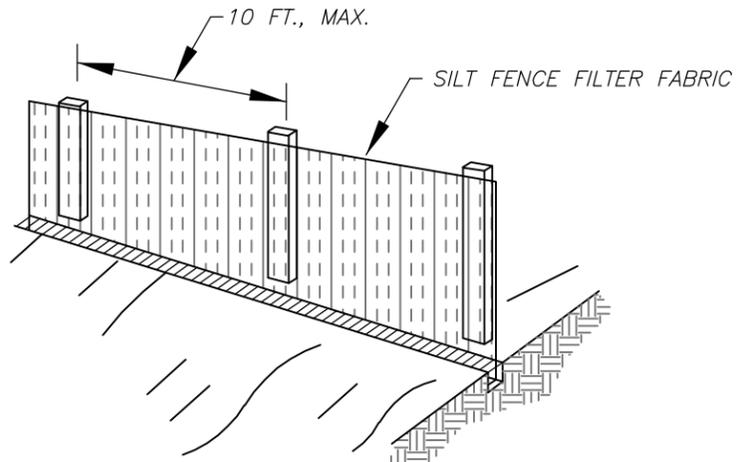

SILT FENCE NOTES:

1. FILTER FABRIC SHALL BE PURCHASED IN A CONTINUOUS ROLL AND CUT TO ALIGNMENT LENGTH TO AVOID JOINTS. WHERE JOINTS ARE UNAVOIDABLE, THE FABRIC SHALL BE SPLICED TOGETHER AT A SUPPORT POST BY TWISTING THE POST OF EACH RUN AROUND EACH OTHER.

2. FILTER FABRIC SHALL BE FASTENED SECURELY TO THE UPSLOPE SIDE OF THE SUPPORT POSTS USING ONE INCH, MINIMUM, LONG HEAVY-DUTY WIRE STAPLES OR TIE WIRES WITH EIGHT INCHES, MINIMUM, OF FABRIC EXTENDED INTO THE TRENCH. DO NOT STAPLE FABRIC TO TREES.


3. COMPACTED SOIL BACKFILL SHALL BE PLACED IN THE 4" BY 4" TRENCH ATOP THE EXTENDED FABRIC.

4. POSTS SHALL BE CONSTRUCTED OF 2" X 2" HARDWOOD OR 2" X 4" PINE BY 60" LONG.

5. FILTER FABRIC SHALL BE NON-WOVEN "MIRAFI 100X", "EXXON GTF 180" OR EQUAL.


6. APPROVED PREFABRICATED UNITS INCLUDE "GEOFAB", "ENVIROFENCE", OR APPROVED EQUAL.

7. THE MAXIMUM RUN OF SLOPE ABOVE A ROW OF SILT FENCE IS 110 FEET.

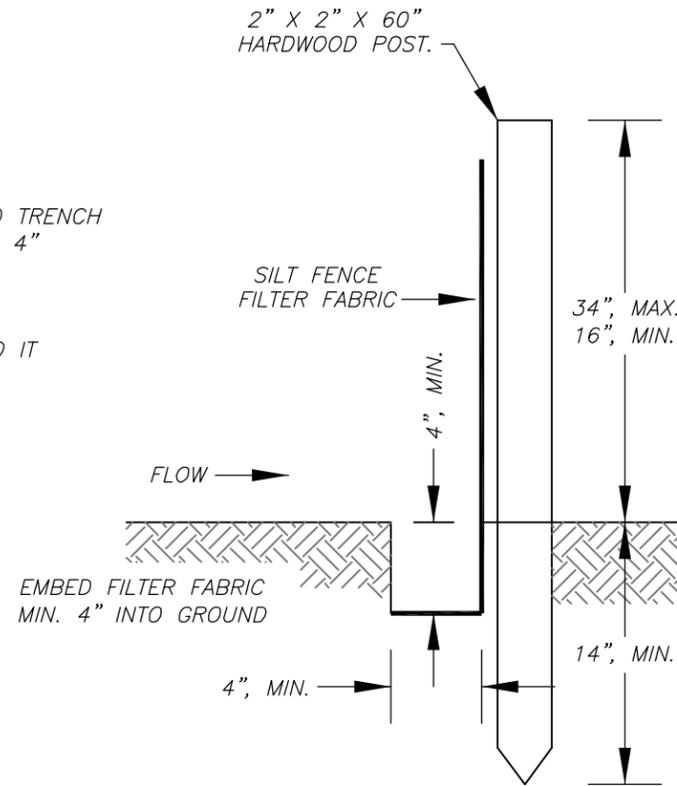


SIDE VIEW

NO SCALE

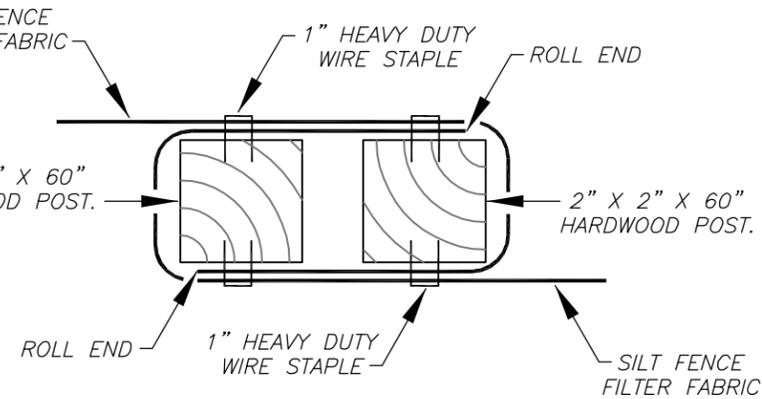


END LAP TOP VIEW

NO SCALE

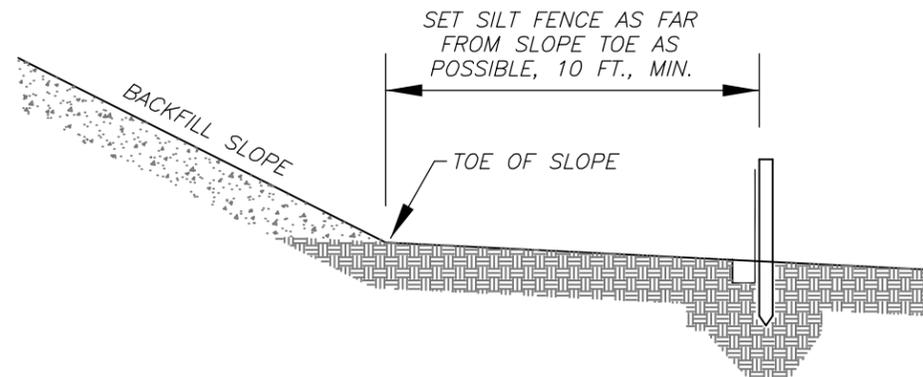

TOE OF SLOPE SILT FENCE LOCATION

NO SCALE

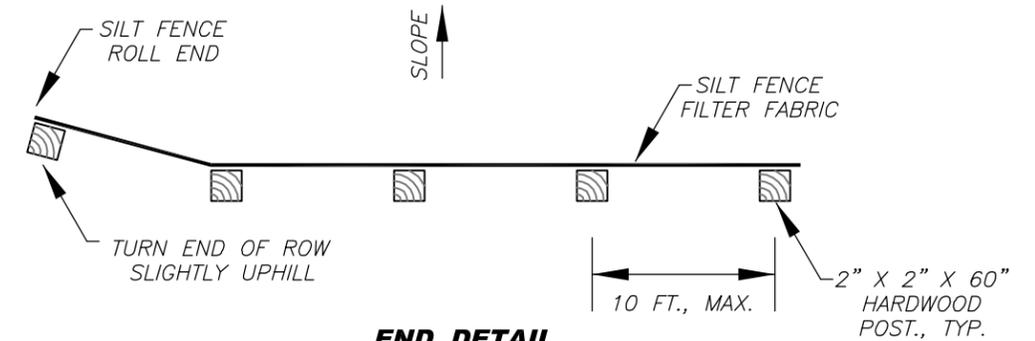

END DETAIL

NO SCALE

**DETAIL XX
SILT FENCE**

NOT TO SCALE