

SWN PRODUCTION COMPANY, LLC

LINDA GREATHOUSE PAD

**GENERAL PERMIT G-70B
CONSTRUCTION PERMIT APPLICATION**

**SUBMITTED TO WVDEP DIVISION OF AIR QUALITY
NOVEMBER 2015**

TABLE OF CONTENTS

INTRODUCTION.....	1
Proposed Emissions	1
Regulatory Discussion	3
APPLICATION FOR GENERAL PERMIT REGISTRATION.....	6
ATTACHMENT A: AGGREGATION ANALYSIS.....	9
ATTACHMENT C: BUSINESS REGISTRATION CERTIFICATE.....	11
ATTACHMENT D: PROCESS FLOW DIAGRAM	13
ATTACHMENT E: PROCESS DESCRIPTION	15
ATTACHMENT F: PLOT PLAN.....	16
ATTACHMENT G: AREA MAP	18
ATTACHMENT H: G70-B SECTION APPLICABILITY FORM.....	20
ATTACHMENT I: EMISSIONS UNITS/ERD TABLE.....	22
ATTACHMENT J: FUGITIVE EMISSIONS SUMMARY SHEET	24
ATTACHMENT L: STORAGE VESSELS DATA SHEET	27
ATTACHMENT M: NATURAL GAS FIRED FUEL BURNING UNITS DATA SHEET	41
ATTACHMENT N: INTERNAL COMBUSTION ENGINE DATA SHEETS	43
ATTACHMENT O: TANKER TRUCK LOADING DATA SHEET.....	72
ATTACHMENT Q: PNEUMATIC CONTROLLERS DATA SHEET	76
ATTACHMENT R: AIR POLLUTION CONTROL DEVICE/EMISSION REDUCTION DEVICES SHEETS.....	78
ATTACHMENT S: EMISSIONS CALCULATIONS.....	83
ATTACHMENT T: FACILITY-WIDE EMISSION SUMMARY SHEETS	129
ATTACHMENT U: CLASS I LEGAL ADVERTISEMENT	132

INTRODUCTION

SWN Production Company, LLC (SWN), submits this G70-B General Permit Construction Permit application for the Linda Greathouse Pad (Linda), a natural gas production facility in Brooke County. Linda was previously authorized under Permit No. R13-2978C issued on November 10, 2014. All previously authorized equipment has been removed; therefore, all equipment in this application is new to Linda. SWN requests authorization with this submittal to construct and operate under the General Permit G-70B for Oil and Natural Gas Production Facilities. The equipment to be added includes the following:

- Two (2) Caterpillar G3306 NA Compressor Engines
- One (1) Caterpillar G3406 NA Engine
- Four (4) 1.0-mmBtu/hr Gas Production Units (GPU)
- Two (2) 0.5-mmBtu/hr Heater Treaters
- Two (2) 1.5-mmBtu/hr Stabilizer Heaters
- Eight (8) 400-bbl Condensate Tanks
- Four (4) 400-bbl Produced Water Tanks
- One (1) 30-mmBtu/hr Vapor Combustor with Pilots
- One (1) NK 100 VRU with Associated Zenith ZPP-644 Engine
- Condensate Loading
- Produced Water Loading
- Fugitive Emissions
- Fugitive Haul Road Emissions

Note that other small storage tanks may be present on site (i.e., methanol) but are considered de minimis sources per Table 45-13B and are listed on the application form.

Proposed Emissions

Emissions calculations for the facility are presented in Attachment S. A fuel heating value of 905 Btu/scf was used to calculate emissions from natural gas-fired equipment. Actual heating value may vary (generally 905 - 1,300) but using a lower heating value in the emissions calculations provides a more conservative (higher) estimate of fuel use. Emissions from the Caterpillar engines, Zenith VRU engine, and heaters were calculated with manufacturer data when available and AP-42/EPA emissions factors for the remaining pollutants.

Condensate tank emissions were calculated by creating a profile in the EPA TANKS 4.0.9d model using properties obtained in a representative liquids analysis as the tank contents. Although

produced water storage tanks contain primarily water, a profile was created in EPA TANKS 4.0.9d assuming 1% of the total throughput as condensate and 99% as water to provide a conservative emissions estimate of the trace hydrocarbons that may be entrained in the water. Flashing emissions were calculated using ProMax process simulation software. Condensate loading has been calculated using the properties from EPA TANKS 4.0.9d and process simulation.

Fugitive emissions were calculated with a component count by equipment type from a similar facility, and representative extended gas and liquids analyses. Fugitive haul road emissions were calculated using EPA/AP-42 methodologies.

Greenhouse gas emissions were calculated with the latest EPA factors and manufacture data when available. Documents used as references for the emissions calculations, including engine specification sheets, AP-42 and EPA emission factor references, gas and liquids analyses, and process simulation results are included in Attachments L and N.

Regulatory Discussion

STATE

45 CSR 13 - PERMITS FOR CONSTRUCTION, MODIFICATION, RELOCATION AND OPERATION OF STATIONARY SOURCES OF AIR POLLUTANTS, NOTIFICATION REQUIREMENTS, ADMINISTRATIVE UPDATES, TEMPORARY PERMITS, GENERAL PERMITS, AND PROCEDURES FOR EVALUATION:

The facility requests to operate under the General Permit G70-B. Emissions of carbon monoxide and volatile organic compounds are less than 80 tons per year (TPY). Oxides of nitrogen emissions are less than 50 TPY and particulate matter 10/2.5 and sulfur dioxide emissions are each less than 20 TPY. Also, the facility will have less than 8 TPY for each hazardous air pollutant and less than 20 tons for total hazardous air pollutants. The engines are subject to NSPS Subpart JJJJ and MACT Subpart ZZZZ.

45 CSR 22 - AIR QUALITY MANAGEMENT FEE PROGRAM:

The facility will be required to maintain a valid Certificate to Operate on the premises.

45 CSR 30 - REQUIREMENTS FOR OPERATING PERMITS:

Emissions from the facility do not exceed major source thresholds; therefore, this rule does not apply.

FEDERAL

40 CFR PART 60 SUBPART KB—STANDARDS OF PERFORMANCE FOR VOLATILE ORGANIC LIQUID STORAGE VESSELS (INCLUDING PETROLEUM LIQUID STORAGE VESSELS) FOR WHICH CONSTRUCTION, RECONSTRUCTION, OR MODIFICATION COMMENCED AFTER JULY 23, 1984

The affected facility to which this subpart applies is each storage vessel with a capacity greater than or equal to 75 cubic meters (m³) that is used to store volatile organic liquids (VOL) for which construction, reconstruction, or modification is commenced after July 23, 1984. The tanks at this facility were constructed after the effective date of this subpart but are less than 75 m³ (which equals approximately 471 bbl); therefore, this subpart does not apply.

40 CFR PART 60 SUBPART KKK - STANDARDS OF PERFORMANCE FOR STATIONARY FOR EQUIPMENT LEAKS OF VOC FROM ONSHORE NATURAL GAS PROCESSING PLANTS:

The facility is not considered an affected source (natural gas processing plant) and is therefore not subject to this Subpart.

40 CFR PART 60 SUBPART IIII - STANDARDS OF PERFORMANCE FOR STATIONARY COMPRESSION IGNITION INTERNAL COMBUSTION ENGINES:

The facility does not contain the affected source (diesel-fired engine) and is therefore not subject to this Subpart.

40 CFR PART 60 SUBPART JJJJ - STANDARDS OF PERFORMANCE FOR STATIONARY SPARK IGNITION INTERNAL COMBUSTION ENGINES:

The engines were manufactured after June 12, 2006 and are subject to the requirements of this subpart. The manufacture dates of the two Caterpillar G3306 NA engines, the one Caterpillar G3406 NA engine, and the VRU engine are not yet known but are presumed to be subject to NSPS Subpart JJJJ as new engines.

40 CFR PART 60 SUBPART OOOO - STANDARDS OF PERFORMANCE FOR CRUDE OIL AND NATURAL GAS PRODUCTION, TRANSMISSION, AND DISTRIBUTION:

The emission sources affected by this Subpart include well completions, pneumatic controllers, equipment leaks from natural gas processing plants, sweetening units at natural gas processing plants, reciprocating compressors, centrifugal compressors and storage vessels which are constructed, modified or reconstructed after August 23, 2011.

Wells located at this production facility are not drilled principally to produce natural gas, therefore they are not affected sources subject to gas well completion requirements.

Pneumatic controllers affected by this Subpart include continuous bleed, natural gas-driven pneumatic controllers with a natural gas bleed rate greater than 6 SCFH. No pneumatic devices with a continuous bleed greater than 6 SCFH will be installed at this facility.

Storage vessels affected by this Subpart include those with VOC emissions greater than 6 TPY. The storage vessels have estimated VOC emissions below 6 TPY per tank and are not subject to this Subpart.

40 CFR PART 63 SUBPART HH - NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES FROM OIL AND NATURAL GAS PRODUCTION FACILITIES:

The site is a minor (area) source of hazardous air pollutants. This subpart applies to affected emission points that are located at facilities that are major and area sources of HAP, and either process, upgrade, or store hydrocarbon liquids prior to custody transfer or that process, upgrade, or store natural gas prior to entering the natural gas transmission and storage source category. For purposes of this subpart natural gas enters the natural gas transmission and storage source category after the natural gas processing plant, if present. The facility is a minor (area) source of HAP and does not have an affected facility as defined by the area source requirements (TEG dehydrators).

40 CFR PART 63 SUBPART HHH - NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES FROM NATURAL TRANSMISSION AND STORAGE FACILITIES:

The facility is not a natural gas transmission and storage facility and is therefore not subject to this Subpart.

40 CFR PART 63 SUBPART ZZZZ - NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS FOR SOURCE CATEGORIES FROM STATIONARY RECIPROCATING INTERNAL COMBUSTION ENGINES - AREA SOURCE:

The original rule, published on February 26, 2004, initially affected new (constructed or reconstructed after December 19, 2002) reciprocating internal combustion engines (RICE) with a site-rating greater than 500 brake horsepower located at a major source of HAP emissions. On January 18, 2008, EPA published an amendment that promulgated standards for RICE constructed or reconstructed after June 12, 2006 with a site rating less than or equal to 500-hp located at major sources, and for engines constructed and reconstructed after June 12, 2006 located at area sources. On August 10, 2010, EPA published another amendment that promulgated standards for existing (constructed or reconstructed before June 12, 2006) RICE at area sources and existing RICE (constructed or reconstructed before June 12, 2006) with a site rating of less than or equal to 500-hp at major sources.

Owners and operators of new or reconstructed engines at area sources must meet the requirements of Subpart ZZZZ by complying with either 40 CFR Part 60 Subpart IIII (for CI engines) or 40 CFR Part 60 Subpart JJJJ (for SI engines). Based on emission calculations, this facility is a minor source of HAP. The engines are subject to NSPS Subpart JJJJ and comply with MACT Subpart ZZZZ by complying with the requirements of NSPS Subpart JJJJ.

SWN Production Company, LLC
Linda Greathouse Pad
November 2015

APPLICATION FOR GENERAL PERMIT REGISTRATION



west virginia department of environmental protection

Division of Air Quality
601 57th Street SE
Charleston, WV 25304
Phone (304) 926-0475
Fax (304) 926-0479
www.dep.wv.gov

G70-B GENERAL PERMIT REGISTRATION APPLICATION

PREVENTION AND CONTROL OF AIR POLLUTION IN REGARD TO THE CONSTRUCTION, MODIFICATION,
RELOCATION, ADMINISTRATIVE UPDATE AND OPERATION OF
NATURAL GAS PRODUCTION FACILITIES LOCATED AT THE WELL SITE

- CONSTRUCTION CLASS I ADMINISTRATIVE UPDATE
MODIFICATION CLASS II ADMINISTRATIVE UPDATE
RELOCATION

SECTION I. GENERAL INFORMATION

Name of Applicant (as registered with the WV Secretary of State's Office): SWN Production Company, LLC

Federal Employer ID No. (FEIN): 26-4388727

Applicant's Mailing Address: 10000 Energy Drive

City: Spring State: TX ZIP Code: 77389

Facility Name: Linda Greathouse Pad

Operating Site Physical Address: Not applicable. Facility is located at 40.204092, -80.60719.
If none available, list road, city or town and zip of facility.

City: Bethany, WV Zip Code: 26003 County: Brooke

Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):

Latitude: 40.204092
Longitude: -80.60719

SIC Code: 1311

DAQ Facility ID No. (For existing facilities)
009-00103

NAICS Code: 211111

CERTIFICATION OF INFORMATION

This G70-B General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of the Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. Any administratively incomplete or improperly signed or unsigned G70-B Registration Application will be returned to the applicant. Furthermore, if the G70-B forms are not utilized, the application will be returned to the applicant. No substitution of forms is allowed.

I hereby certify that Paul Geiger is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Division of Air Quality immediately.

I hereby certify that all information contained in this G70-B General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible.

Responsible Official Signature: [Signature]
Name and Title: Paul Geiger, Sr. Vice President Ops Management Phone: 832-796-1000
Fax: 832-796-4818
Email: Paul_Geiger@swn.com Date: 11-16-15

If applicable:
Authorized Representative Signature:
Name and Title: Phone: Fax:
Email: Date:

If applicable:
Environmental Contact
Name and Title: Kristi Evans Phone: Fax:
Email: Kristi_Evans@swn.com Date:

OPERATING SITE INFORMATION	
Briefly describe the proposed new operation and/or any change(s) to the facility: Four engines, eight heaters, eight condensate tanks, four produced water tanks, and a vapor combustor will be added. Fugitive emissions, condensate loading, produced water loading and haul road emissions will also occur.	
Directions to the facility: From intersection of Route 2 and CR 1 (Short Creek Road/Airport Road) above the village of Clearview, WV, along the Ohio River, proceed east 0.60 miles to CR 2/2 (Girty's Point Road) and turn left. Travel 2.55 miles to CR 28 (Huffs Run-Apple Pie Ridge) and turn left. Drive 0.65 miles to the stop sign and turn left to continue on CR 28 (Apple Pie Ridge Road). Drive 1.13 miles to CR 30 (Hukill Run Road) and turn right. The well pad access road will be 0.77 miles on the right.	
ATTACHMENTS AND SUPPORTING DOCUMENTS	
I have enclosed the following required documents:	
Check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR13 and 45CSR22).	
<input checked="" type="checkbox"/> Check attached to front of application. <input type="checkbox"/> I wish to pay by electronic transfer. Contact for payment (incl. name and email address): <input type="checkbox"/> I wish to pay by credit card. Contact for payment (incl. name and email address):	
<input checked="" type="checkbox"/> \$500 (Construction, Modification, and Relocation) <input type="checkbox"/> \$300 (Class II Administrative Update) <input checked="" type="checkbox"/> \$1,000 NSPS fee for 40 CFR60, Subpart IIII, JJJJ and/or OOOO ¹ <input type="checkbox"/> \$2,500 NESHAP fee for 40 CFR63, Subpart ZZZZ and/or HH ²	
¹ Only one NSPS fee will apply. ² Only one NESHAP fee will apply. The Subpart ZZZZ NESHAP fee will be waived for new engines that satisfy requirements by complying with NSPS, Subparts IIII and/or JJJJ. <i>NSPS and NESHAP fees apply to new construction or if the source is being modified.</i>	
<input checked="" type="checkbox"/> Responsible Official or Authorized Representative Signature (if applicable)	
<input checked="" type="checkbox"/> Single Source Determination Form (must be completed in its entirety) – Attachment A	
<input type="checkbox"/> Siting Criteria Waiver (if applicable) – Attachment B	<input checked="" type="checkbox"/> Current Business Certificate – Attachment C
<input checked="" type="checkbox"/> Process Flow Diagram – Attachment D	<input checked="" type="checkbox"/> Process Description – Attachment E
<input checked="" type="checkbox"/> Plot Plan – Attachment F	<input checked="" type="checkbox"/> Area Map – Attachment G
<input checked="" type="checkbox"/> G70-B Section Applicability Form – Attachment H	<input checked="" type="checkbox"/> Emission Units/ERD Table – Attachment I
<input checked="" type="checkbox"/> Fugitive Emissions Summary Sheet – Attachment J	
<input type="checkbox"/> Gas Well Affected Facility Data Sheet (if applicable) – Attachment K	
<input checked="" type="checkbox"/> Storage Vessel(s) Data Sheet (include gas sample data, USEPA Tanks, simulation software (e.g. ProMax, E&P Tanks, HYSYS, etc.), etc. where applicable) – Attachment L	
<input checked="" type="checkbox"/> Natural Gas Fired Fuel Burning Unit(s) Data Sheet (GPUs, Heater Treaters, In-Line Heaters if applicable) – Attachment M	
<input checked="" type="checkbox"/> Internal Combustion Engine Data Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment N	
<input checked="" type="checkbox"/> Tanker Truck Loading Data Sheet (if applicable) – Attachment O	
<input type="checkbox"/> Glycol Dehydration Unit Data Sheet(s) (include wet gas analysis, GRI- GLYCalc™ input and output reports and information on reboiler if applicable) – Attachment P	
<input checked="" type="checkbox"/> Pneumatic Controllers Data Sheet – Attachment Q	
<input checked="" type="checkbox"/> Air Pollution Control Device/Emission Reduction Device(s) Sheet(s) (include manufacturer performance data sheet(s) if applicable) – Attachment R	
<input checked="" type="checkbox"/> Emission Calculations (please be specific and include all calculation methodologies used) – Attachment S	
<input checked="" type="checkbox"/> Facility-wide Emission Summary Sheet(s) – Attachment T	
<input checked="" type="checkbox"/> Class I Legal Advertisement – Attachment U	
<input checked="" type="checkbox"/> One (1) paper copy and two (2) copies of CD or DVD with pdf copy of application and attachments	

All attachments must be identified by name, divided into sections, and submitted in order.

ATTACHMENT A: AGGREGATION ANALYSIS

ATTACHMENT A - SINGLE SOURCE DETERMINATION FORM

Classifying multiple facilities as one “stationary source” under 45CSR13, 45CSR14, and 45CSR19 is based on the definition of Building, structure, facility, or installation as given in §45-14-2.13 and §45-19-2.12. The definition states:

“Building, Structure, Facility, or Installation” means all of the pollutant-emitting activities which belong to the same industrial grouping, are located on one or more contiguous or adjacent properties, and are under the control of the same person (or persons under common control). Pollutant-emitting activities are a part of the same industrial grouping if they belong to the same “Major Group” (i.e., which have the same two (2)-digit code) as described in the Standard Industrial Classification Manual, 1987 (United States Government Printing Office stock number GPO 1987 0-185-718:QL 3).

Is there a facility owned by or associated with the natural gas industry located within one (1) mile of the proposed facility? Yes No

If Yes, please complete the questionnaire on the following page (Attachment A).

Please provide a source aggregation analysis for the proposed facility below:

The aggregation of facilities is appropriate only if separate emissions sources meet the following three-prong test:

1. The sources belong to a single major industrial grouping (same two-digit major SIC code);
2. The sources are under common control of the same person (or persons under common control); and
3. The sources are located on one or more “contiguous or adjacent” properties.

Under the third prong, SWN determined that there were no other facilities contiguous with or adjacent to Linda to be permitted. Neither the WV DEP nor EPA have established a distance under which source aggregations are required, but the terms “contiguous” or “adjacent” require analyzing distances between operations. To be considered contiguous, two operations must share a common fence line. As for adjacent, operations located more than a quarter of a mile apart are clearly not adjacent, but operations within a quarter of a mile require an analysis to determine if they meet the common sense notion of a plant. No other SWN locations are located within a quarter mile of Linda to be permitted; therefore, no additional facilities are contiguous or adjacent.

ATTACHMENT C: BUSINESS REGISTRATION CERTIFICATE

**WEST VIRGINIA
STATE TAX DEPARTMENT
BUSINESS REGISTRATION
CERTIFICATE**

ISSUED TO:
**SWN PRODUCTION COMPANY, LLC
5400D BIG TYLER RD
CHARLESTON, WV 25313-1103**

BUSINESS REGISTRATION ACCOUNT NUMBER: **2307-3731**

This certificate is issued on: **12/8/2014**

This certificate is issued by: **[Signature]**
the West Virginia State Tax Commissioner,
in accordance with Chapter 11, Article 12, of the West Virginia Code.

The person or organization identified on this certificate is registered
to conduct business in the State of West Virginia at the location above.

This certificate is not transferrable and must be displayed at the location for which issued.


This certificate shall be permanent until cessation of the business for which the certificate of registration
was granted, or until it is suspended, revoked or cancelled by the Tax Commissioner.

Change in name or change of location shall be considered a cessation of the business and a new
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of
this certificate displayed at every job site within West Virginia.

atL006 v.4
L1180094016

ATTACHMENT D: PROCESS FLOW DIAGRAM

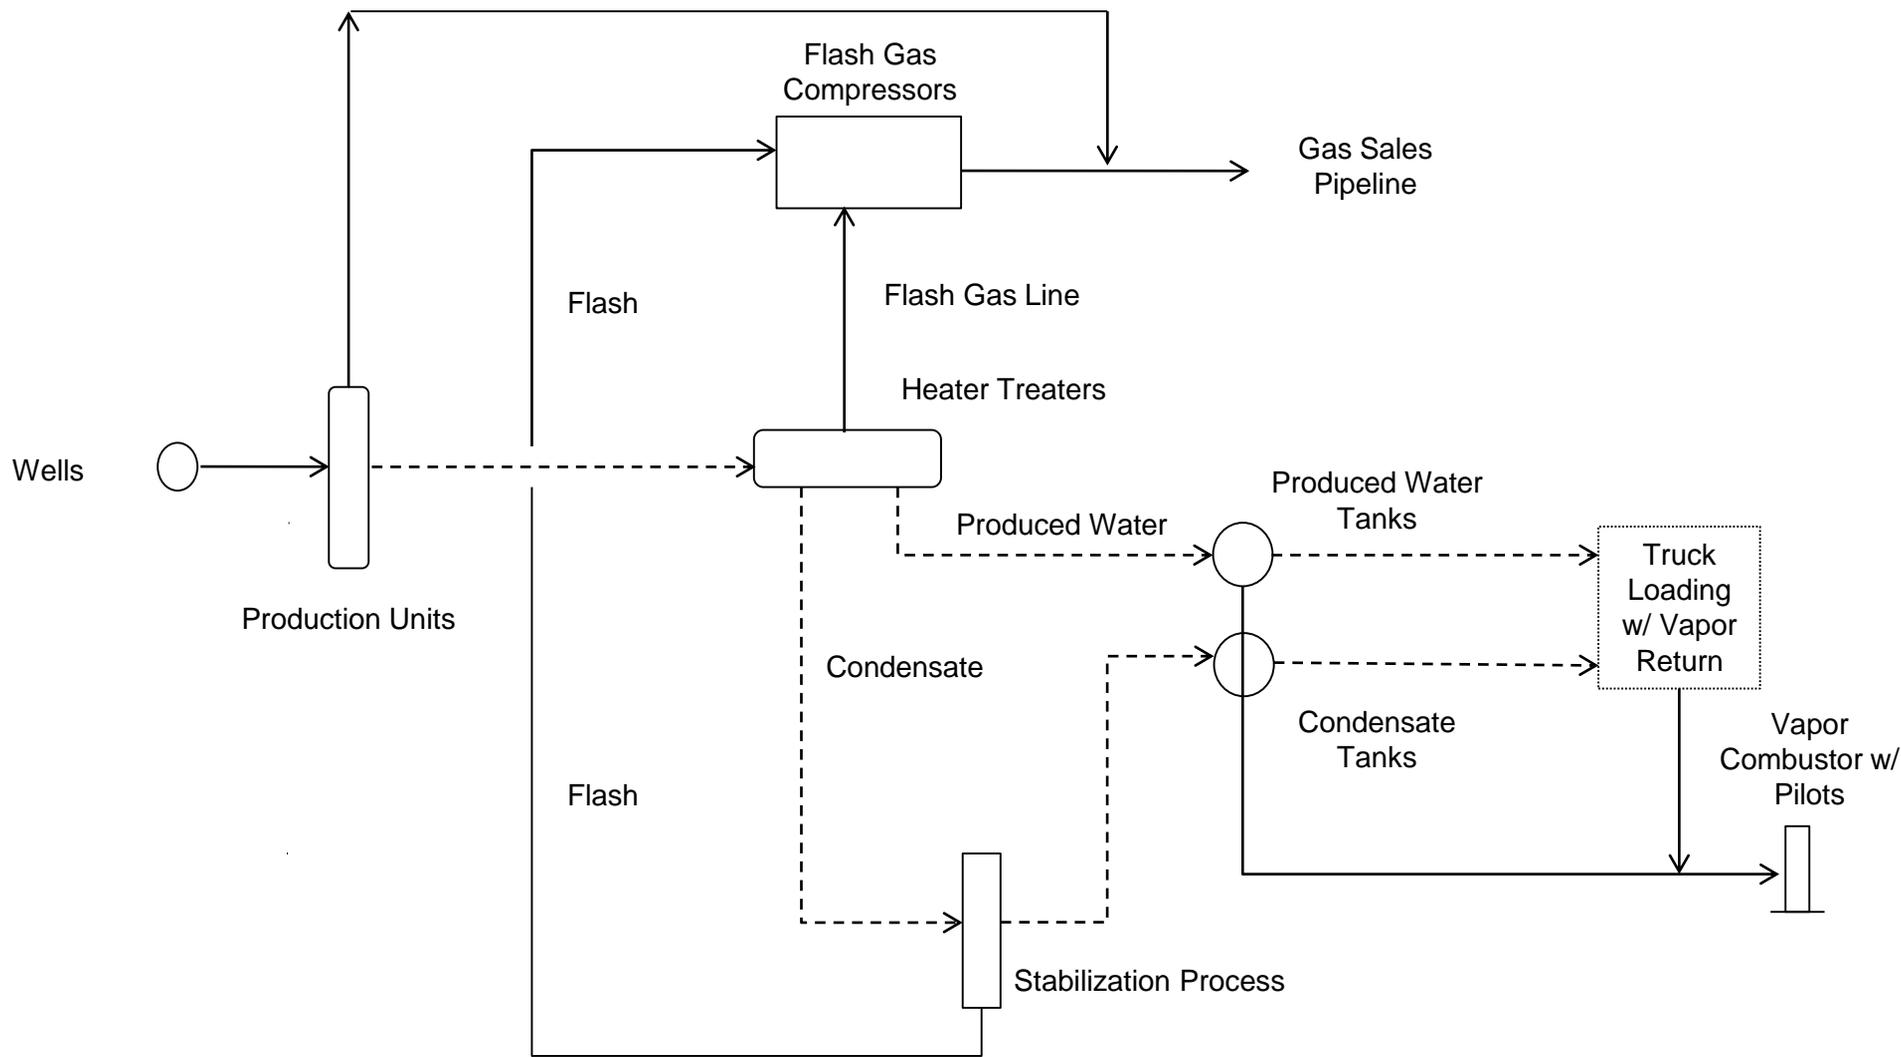

———— Gas/Vapor
 - - - - - Liquids (Condensate and Produced Water)

SWN Production Company, LLC
Linda Greathouse Pad
 Attachment D: Process Flow Diagram
 November 2015

Note: Drawing is a depiction of general facility process and is not intended to represent facility and/or equipment layout.


ATTACHMENT E: PROCESS DESCRIPTION

The facility is an oil and natural gas exploration and production facility, responsible for the production of condensate and natural gas. Storage of condensate and produced water will also occur on-site. A description of the facility process is as follows: Condensate, gas and water come from the wellhead(s) to the production unit(s), where the first stage of separation occurs. Fluids (condensate and produced water) will be sent to the heater treater(s). Produced water from the heater treater(s) flows into the produced water storage tank(s). Condensate flows into the condensate storage tank(s). Flash gases from the heater treater(s) are routed via hard-piping (with 100% capture efficiency) to the inlet of the flash gas compressor(s) to be compressed.


The natural gas stream will exit the facility for transmission via pipeline. Condensate and produced water are transported offsite via truck. Loading emissions will be controlled with vapor return, which has at least 70% capture efficiency, and will be routed to the vapor combustor for at least 98% destruction efficiency, for an overall control efficiency of 69%. Working, breathing and flashing vapors from the condensate and produced water storage tanks will be controlled by the VRU but are represented in the calculations as being controlled by the combustor for operational flexibility and as a conservative calculation of emissions. The vapor combustor has three (3) natural gas-fired pilots to ensure a constant flame for combustion.

A process flow diagram reflecting facility operations is shown in Attachment D.


ATTACHMENT F: PLOT PLAN




GPUs



Heater Treaters





Stabilizer Heater




Compressor

Engines

Wellheads

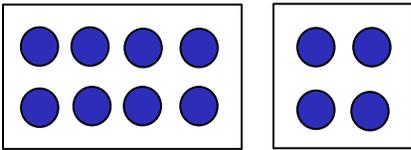


Condensate/Produced Water
Storage Tanks



SWN Production Company, LLC
Linda Greathouse Pad – ID 009-00103
Attachment E: Simple Plot Plan
November 2015

The equipment demonstrates general location layout and equipment counts may be different than what is shown.

ATTACHMENT G: AREA MAP

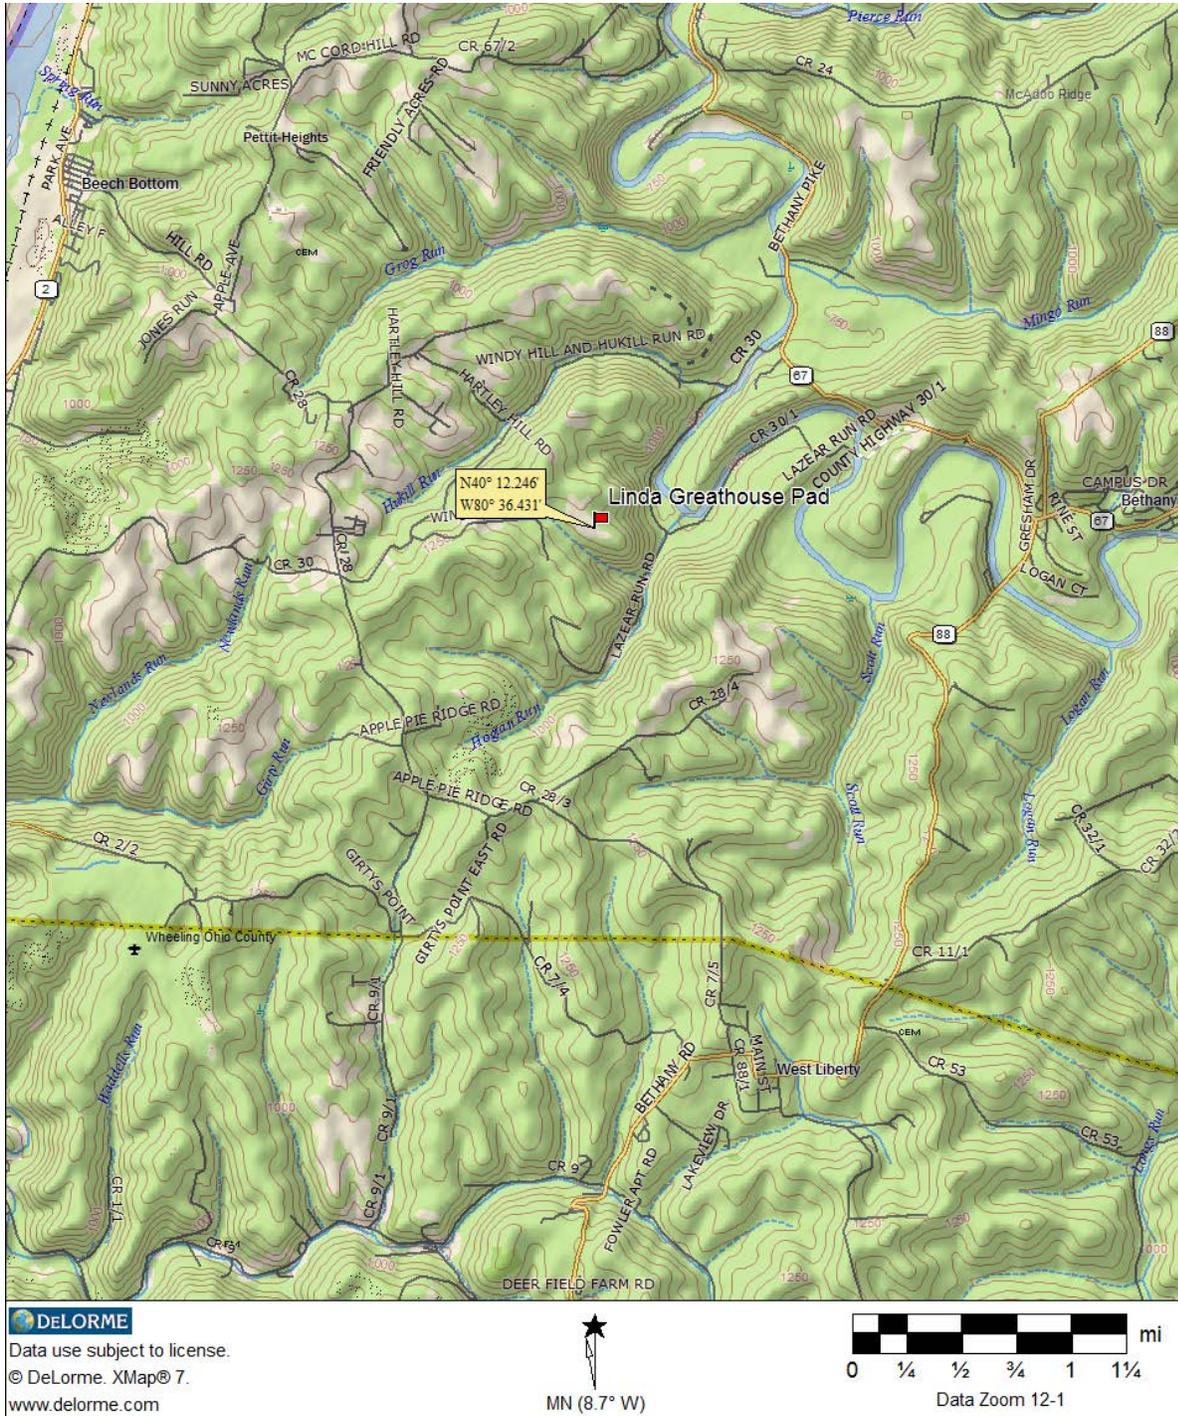

Linda Greathouse Pad
Brooke County, WV
November 2015



Linda Greathouse Pad
Figure 2: 300' Radius
November 2015

ATTACHMENT H: G70-B SECTION APPLICABILITY FORM

ATTACHMENT H – G70-B SECTION APPLICABILITY FORM

**General Permit G70-B Registration
Section Applicability Form**

General Permit G70-B was developed to allow qualified applicants to seek registration for a variety of sources. These sources include gas well affected facilities, storage vessels, gas production units, in-line heaters, heater treaters, glycol dehydration units and associated reboilers, pneumatic controllers, centrifugal compressors, reciprocating compressors, reciprocating internal combustion engines (RICES), tank truck loading, fugitive emissions, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-B allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

GENERAL PERMIT G70-B APPLICABLE SECTIONS	
<input type="checkbox"/> Section 5.0	Gas Well Affected Facility (NSPS, Subpart OOOO)
<input checked="" type="checkbox"/> Section 6.0	Storage Vessels Containing Condensate and/or Produced Water ¹
<input type="checkbox"/> Section 7.0	Storage Vessel Affected Facility (NSPS, Subpart OOOO)
<input checked="" type="checkbox"/> Section 8.0	Control Devices and Emission Reduction Devices not subject to NSPS Subpart OOOO and/or NESHAP Subpart HH
<input checked="" type="checkbox"/> Section 9.0	Small Heaters and Reboilers not subject to 40CFR60 Subpart Dc
<input type="checkbox"/> Section 10.0	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO)
<input type="checkbox"/> Section 11.0	Centrifugal Compressor Affected Facility (NSPS, Subpart OOOO) ²
<input type="checkbox"/> Section 12.0	Reciprocating Compressor Affected Facility (NSPS, Subpart OOOO) ²
<input checked="" type="checkbox"/> Section 13.0	Reciprocating Internal Combustion Engines, Generator Engines, Microturbines
<input checked="" type="checkbox"/> Section 14.0	Tanker Truck Loading ³
<input type="checkbox"/> Section 15.0	Glycol Dehydration Units ⁴

- 1 Applicants that are subject to Section 6 may also be subject to Section 7 if the applicant is subject to the NSPS, Subpart OOOO control requirements or the applicable control device requirements of Section 8.
- 2 Applicants that are subject to Section 11 and 12 may also be subject to the applicable RICE requirements of Section 13.
- 3 Applicants that are subject to Section 14 may also be subject to control device and emission reduction device requirements of Section 8.
- 4 Applicants that are subject to Section 15 may also be subject to the requirements of Section 9 (reboilers). Applicants that are subject to Section 15 may also be subject to control device and emission reduction device requirements of Section 8.

ATTACHMENT I: EMISSIONS UNITS/ERD TABLE

ATTACHMENT I - EMISSION UNITS/EMISSION REDUCTION DEVICES (ERD) TABLE

Include ALL emission units and air pollution control devices/ERDs that will be part of this permit application review. Do not include fugitive emission sources in this table. Deminimis storage tanks shall be listed in the Attachment L table. This information is required for all sources regardless of whether it is a construction, modification, or administrative update.

Emission Unit ID ¹	Emission Point ID ²	Emission Unit Description	Year Installed	Manufac. Date ³	Design Capacity	Type ⁴ and Date of Change	Control Device(s) ⁵	ERD(s) ⁶
EU-ENG1	EP-ENG1	145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	TBD	TBD	145-hp	New	NSCR	NSCR
EU-ENG2	EP-ENG2	145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	TBD	TBD	145-hp	New	NSCR	NSCR
EU-ENG3	EP-ENG3	215-hp Caterpillar G3406 NA Engine	TBD	TBD	215-hp	New	NSCR	NSCR
EU-ENG4	EP-ENG4	77-kw Zenith ZPP-644 4.4L 6 Cylinder Engine	TBD	TBD	77-kW	New	NSCR	NSCR
EU-GPU1 - EU-GPU4	EP-GPU1 - EP-GPU4	Four (4) 1.0-mmBtu/hr GPU Burners	TBD	TBD	1-mmBtu/hr	New	N/A	N/A
EU-HT1 - EU- HT2	EP-HT1 - EP-HT2	Two (2) 0.5-mmBtu/hr Heater Treaters	TBD	TBD	0.5-mmBtu/hr	New	N/A	N/A
EU-SH1 - EU-SH2	EP-SH1 - EP-SH2	Two (2) 1.5-mmBtu/hr Stabilizer Heaters	TBD	TBD	1.5-mmBtu/hr	New	N/A	N/A
EU-TANKS- COND	APC-COMB- TKLD	Eight (8) 400-bbl Condensate Tanks Routed to Vapor Combustor	TBD	TBD	400-bbl	New	APC-COMB- TKLD	APC-VRU- TANKS
EU-TANKS- PW	APC-COMB- TKLD	Four (4) 400-bbl Produced Water Tanks Routed to Vapor Combustor	TBD	TBD	400-bbl	New	APC-COMB- TKLD	APC-VRU- TANKS
EU-LOAD- COND	APC-COMB- TKLD	Condensate Truck Loading w/ Vapor Return Routed to Combustor	TBD	TBD	38,325,000 gal/yr	New	Vapor Return and APC- COMB-TKLD	Vapor Return and APC- COMB-TKLD
EU-LOAD- PW	APC-COMB- TKLD	Produced Water Truck Loading w/ Vapor Return Routed to Combustor	TBD	TBD	15,330,000 gal/yr	New	Vapor Return and APC- COMB-TKLD	Vapor Return and APC- COMB-TKLD
APC-COMB- TKLD	APC-COMB- TKLD	One (1) 30.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	TBD	TBD	30-mmBtu/hr	New	N/A	N/A
EU-PILOT	APC-COMB- TKLD	Vapor Combustor Pilots	TBD	TBD	150-scfh	New	N/A	N/A
EU-HR	EP-HR	Fugitive Haul Road Emissions	TBD	TBD	N/A	New	N/A	N/A

¹ For Emission Units (or Sources) use the following numbering system:1S, 2S, 3S,... or other appropriate designation.

² For Emission Points use the following numbering system:1E, 2E, 3E, ... or other appropriate designation.

³ When required by rule

⁴ New, modification, removal, existing

⁵ For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

⁶ For ERDs use the following numbering system: 1D, 2D, 3D,... or other appropriate designation.

ATTACHMENT J: FUGITIVE EMISSIONS SUMMARY SHEET

Fugitive emissions at this site consist of haul road emissions, condensate and produced water loading operations, and equipment leaks.

ATTACHMENT J – FUGITIVE EMISSIONS SUMMARY SHEET

Sources of fugitive emissions may include loading operations, equipment leaks, blowdown emissions, etc.
Use extra pages for each associated source or equipment if necessary.

Source/Equipment: FUG

Leak Detection Method Used		<input type="checkbox"/> Audible, visual, and olfactory (AVO) inspections		<input type="checkbox"/> Infrared (FLIR) cameras		<input type="checkbox"/> Other (please describe)		<input checked="" type="checkbox"/> None required	
Component Type	Closed Vent System	Count	Source of Leak Factors (EPA, other (specify))	Stream type (gas, liquid, etc.)	Estimated Emissions (tpy)				
					VOC	HAP	GHG (CO _{2e})		
Pumps	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					
Valves	<input type="checkbox"/> Yes <input type="checkbox"/> No	84-gas 101-light oil	EPA	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	0.88 – gas 2.30 – light oil	0.02 – gas 0.20 – light oil			
Safety Relief Valves	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					
Open Ended Lines	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					
Sampling Connections	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					
Connections (Not sampling)	<input type="checkbox"/> Yes <input type="checkbox"/> No			<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both					
Compressors	<input type="checkbox"/> Yes <input type="checkbox"/> No	12-gas	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.25-gas	<0.01-gas			
Flanges	<input type="checkbox"/> Yes <input type="checkbox"/> No	384-gas 398-light oil	EPA	<input type="checkbox"/> Gas <input type="checkbox"/> Liquid <input checked="" type="checkbox"/> Both	0.35-gas 0.40-light oil	0.01-gas 0.03-light oil			
Other ¹	<input type="checkbox"/> Yes <input type="checkbox"/> No	31-gas	EPA	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid <input type="checkbox"/> Both	0.64-gas	0.01-gas			

¹ Other equipment types may include compressor seals, relief valves, diaphragms, drains, meters, etc.

Please provide an explanation of the sources of fugitive emissions (e.g. pigging operations, equipment blowdowns, pneumatic controllers, etc.):
Equipment leaks

Please indicate if there are any closed vent bypasses (include component):

N/A

Specify all equipment used in the closed vent system (e.g. VRU, ERD, thief hatches, tanker truck loading, etc.)

N/A

ATTACHMENT L: STORAGE VESSELS DATA SHEET

REPRESENTATIVE GAS ANALYSES

TANKS 4.0.9D REPORTS

PROMAX PROCESS SIMULATION RESULTS

ATTACHMENT L – STORAGE VESSEL DATA SHEET

Complete this data sheet if you are the owner or operator of a storage vessel that contains condensate and/or produced water. This form must be completed for *each* new or modified bulk liquid storage vessel(s) that contains condensate and/or produced water. (If you have more than one (1) identical tank (i.e. 4-400 bbl condensate tanks), then you can list all on one (1) data sheet). **Include gas sample analysis, flashing emissions, working and breathing losses, USEPA Tanks, simulation software (ProMax, E&P Tanks, HYSYS, etc.), and any other supporting documents where applicable.**

The following information is REQUIRED:

- Composition of the representative sample used for the simulation
- For each stream that contributes to flashing emissions:
 - Temperature and pressure (inlet and outlet from separator(s))
 - Simulation-predicted composition
 - Molecular weight
 - Flow rate
- Resulting flash emission factor or flashing emissions from simulation
- Working/breathing loss emissions from tanks and/or loading emissions if simulation is used to quantify those emissions

Additional information may be requested if necessary.

GENERAL INFORMATION (REQUIRED)

1. Bulk Storage Area Name Condensate Storage	2. Tank Name Eight (8) 400-bbl Condensate Storage Tanks
3. Emission Unit ID number EU-TANKS-COND	4. Emission Point ID number EP-TANKS-COND
5. Date Installed , Modified or Relocated <i>(for existing tanks)</i> TBD Was the tank manufactured after August 23, 2011? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other <input type="checkbox"/> Relocation
7A. Description of Tank Modification <i>(if applicable)</i> N/A	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Was USEPA Tanks simulation software utilized? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
<i>If Yes, please provide the appropriate documentation and items 8-42 below are not required.</i>	

TABLE 1-B

COMPOSITIONAL ANALYSIS OF THE SEPARATOR GAS, OIL AND MATHEMATICALLY RECOMBINED WELLSTREAM THROUGH C₁₁₊

SEPARATOR GOR.....: 5065 Scf/Sep Bbl
 SEPARATOR PRESSURE.....: 300 psig
 SEPARATOR TEMPERATURE.....: 62 °F

Component	SEPARATOR GAS		SEPARATOR OIL		WELLSTREAM	
	Mole%	* GPM	Mole %	Liquid Volume %	Mole %	* GPM
Hydrogen Sulfide	0.000	0.000	0.000	0.000	0.000	0.000
Nitrogen	0.552	0.000	0.028	0.008	0.453	0.000
Carbon Dioxide	0.112	0.000	0.011	0.014	0.093	0.000
Methane	71.526	0.000	6.698	1.096	59.262	0.000
Ethane	18.189	4.903	10.944	7.700	16.818	4.534
Propane	6.822	1.894	13.880	10.060	8.157	2.265
Iso-butane	0.533	0.176	2.495	2.148	0.904	0.298
N-butane	1.514	0.481	10.341	8.577	3.184	1.012
2-2 Dimethylpropane	0.000	0.000	0.187	0.188	0.035	0.014
Iso-pentane	0.183	0.067	3.123	3.004	0.739	0.272
N-pentane	0.284	0.104	6.276	5.985	1.418	0.518
2-2 Dimethylbutane	0.004	0.002	0.098	0.107	0.022	0.009
Cyclopentane	0.004	0.001	0.000	0.000	0.003	0.001
2-3 Dimethylbutane	0.006	0.002	0.305	0.328	0.062	0.026
2 Methylpentane	0.052	0.022	2.297	2.508	0.477	0.199
3 Methylpentane	0.029	0.012	1.407	1.511	0.290	0.119
Other Hexanes	0.000	0.000	0.000	0.000	0.000	0.000
n-Hexane	0.091	0.038	5.434	5.878	1.102	0.457
Methylcyclopentane	0.007	0.002	0.686	0.638	0.135	0.048
Benzene	0.001	0.000	0.084	0.062	0.017	0.005
Cyclohexane	0.009	0.003	0.828	0.742	0.164	0.056
2-Methylhexane	0.010	0.005	1.625	1.988	0.316	0.148
3-Methylhexane	0.011	0.005	1.491	1.800	0.291	0.135
2,2,4 Trimethylpentane	0.000	0.000	0.000	0.000	0.000	0.000
Other Heptanes	0.009	0.004	0.724	0.828	0.144	0.063
n-Heptane	0.020	0.009	3.773	4.579	0.730	0.339
Methylcyclohexane	0.009	0.004	1.678	1.774	0.325	0.132
Toluene	0.002	0.001	0.326	0.288	0.063	0.021
Other C-8's	0.011	0.005	4.633	5.709	0.885	0.418
n-Octane	0.004	0.002	2.389	3.219	0.455	0.235
Ethylbenzene	0.000	0.000	0.295	0.300	0.056	0.022
M&P-Xylene	0.001	0.000	0.338	0.345	0.065	0.025
O-Xylene	0.000	0.000	0.650	0.650	0.123	0.047
Other C-9's	0.003	0.002	2.778	3.823	0.528	0.278
n-Nonane	0.001	0.001	1.531	2.266	0.290	0.165
Other C10's	0.001	0.001	2.995	4.530	0.567	0.329
n-Decane	0.000	0.000	0.936	1.512	0.177	0.110
Undecanes Plus	0.000	0.000	8.717	15.832	1.649	1.147
TOTAL	100.000	7.746	100.000	100.000	100.000	13.447

TABLE 1-B

COMPOSITIONAL ANALYSIS OF THE SEPARATOR GAS, OIL AND MATHEMATICALLY RECOMBINED WELLSTREAM THROUGH C₁₁₊

SEPARATOR GOR.....: 5065 Scf/Sep Bbl
 SEPARATOR PRESSURE.....: 300 psig
 SEPARATOR TEMPERATURE.....: 62 °F

UNDECANES PLUS (C ₁₁₊) FRACTION CHARACTERISTICS						
COMPONENT	Specific Gravity		Molecular Weight lb/lb-mole	Vapor Volume Scf/Gal	Gross Heating Value	
	°API	**			***	
Gas	N/A	0.8250	156.000	16.558	8,400	
Oil	42.269	0.8143	177.400	14.372	129,114	
Wellstream	N/A	0.8143	177.400	14.372	N/A	

TOTAL SAMPLE CHARACTERISTICS						
COMPONENT	Specific Gravity		Molecular Weight lb/lb-mole	Vapor Volume Scf/Gal	Gross Heating Value	
	°API	**			***	Saturated ***
Gas	N/A	0.7607	21.942	129.099	1,335	1,313
Oil	81.464	0.6644	79.702	26.101	N/A	112,234
Wellstream	N/A	1.1349	32.869	57.947	N/A	N/A

* GPM (gallons per Mscf) determined at 14.85 psia and 60 °F

** Gas specific gravity and wellstream specific gravity determined relative to air (SG=1.000).
 Oil specific gravity determined relative to water (SG=1.000).

*** Gross Heating Value units for gas (real basis) and oil are BTU/Scf and BTU/Gal, respectively.

TANKS 4.0.9d
Emissions Report - Summary Format
Tank Identification and Physical Characteristics

Identification

User Identification: Linda Greathouse Pad - 2,500 BOPD
City:
State:
Company:
Type of Tank: Vertical Fixed Roof Tank
Description:

Tank Dimensions

Shell Height (ft): 20.00
Diameter (ft): 12.00
Liquid Height (ft) : 19.00
Avg. Liquid Height (ft): 10.00
Volume (gallons): 16,074.56
Turnovers: 2,384.20
Net Throughput(gal/yr): 38,325,000.00
Is Tank Heated (y/n): N

Paint Characteristics

Shell Color/Shade: White/White
Shell Condition: Good
Roof Color/Shade: White/White
Roof Condition: Good

Roof Characteristics

Type: Cone
Height (ft) 0.00
Slope (ft/ft) (Cone Roof) 0.06

Breather Vent Settings

Vacuum Settings (psig): -0.03
Pressure Settings (psig) 0.03

Meteorological Data used in Emissions Calculations: Pittsburgh, Pennsylvania (Avg Atmospheric Pressure = 14.11 psia)

TANKS 4.0.9d
Emissions Report - Summary Format
Liquid Contents of Storage Tank

Linda Greathouse Pad - 2,500 BOPD - Vertical Fixed Roof Tank

Mixture/Component	Month	Daily Liquid Surf. Temperature (deg F)			Liquid Bulk Temp (deg F)	Vapor Pressure (psia)			Vapor Mol. Weight.	Liquid Mass Fract.	Vapor Mass Fract.	Mol. Weight	Basis for Vapor Pressure Calculations
		Avg.	Min.	Max.		Avg.	Min.	Max.					
Linda Greathouse Pad - Alan Degarmo	All	51.94	47.06	56.81	50.33	8.4662	7.8178	9.1546	55.4860			106.72	Option 4: RVP=12.05

TANKS 4.0.9d
Emissions Report - Summary Format
Individual Tank Emission Totals

Emissions Report for: Annual

Linda Greathouse Pad - 2,500 BOPD - Vertical Fixed Roof Tank

	Losses(lbs)		
Components	Working Loss	Breathing Loss	Total Emissions
Linda Greathouse Pad - Alan Degarmo	57,626.70	1,706.11	59,332.81

TANKS 4.0.9d
Emissions Report - Summary Format
Tank Identification and Physical Characteristics

Identification

User Identification: Linda Greathouse - 1,000 BWPD
City:
State:
Company:
Type of Tank: Vertical Fixed Roof Tank
Description:

Tank Dimensions

Shell Height (ft): 20.00
Diameter (ft): 12.00
Liquid Height (ft) : 19.00
Avg. Liquid Height (ft): 10.00
Volume (gallons): 16,074.56
Turnovers: 953.68
Net Throughput(gal/yr): 15,330,000.00
Is Tank Heated (y/n): N

Paint Characteristics

Shell Color/Shade: White/White
Shell Condition: Good
Roof Color/Shade: White/White
Roof Condition: Good

Roof Characteristics

Type: Cone
Height (ft) 0.00
Slope (ft/ft) (Cone Roof) 0.06

Breather Vent Settings

Vacuum Settings (psig): -0.03
Pressure Settings (psig) 0.03

Meteorological Data used in Emissions Calculations: Pittsburgh, Pennsylvania (Avg Atmospheric Pressure = 14.11 psia)

TANKS 4.0.9d
Emissions Report - Summary Format
Liquid Contents of Storage Tank

Linda Greathouse - 1,000 BWPD - Vertical Fixed Roof Tank

Mixture/Component	Month	Daily Liquid Surf. Temperature (deg F)			Liquid Bulk Temp (deg F)	Vapor Pressure (psia)			Vapor Mol. Weight.	Liquid Mass Fract.	Vapor Mass Fract.	Mol. Weight	Basis for Vapor Pressure Calculations
		Avg.	Min.	Max.		Avg.	Min.	Max.					
Produced Water	All	51.94	47.06	56.81	50.33	0.2052	0.1723	0.2436	20.6523			18.17	
Linda Greathouse Pad - Alan Degarmo						8.4662	7.8178	9.1546	55.4860	0.0100	0.1888	106.72	Option 4: RVP=12.05
Water						0.1911	0.1592	0.2284	18.0200	0.9900	0.8112	18.02	Option 2: A=8.10765, B=1750.286, C=235

TANKS 4.0.9d
Emissions Report - Summary Format
Individual Tank Emission Totals

Emissions Report for: Annual


Linda Greathouse - 1,000 BWPD - Vertical Fixed Roof Tank



Components	Losses(lbs)		
	Working Loss	Breathing Loss	Total Emissions
Produced Water	229.82	11.32	241.14
Water	186.43	9.18	195.62
Linda Greathouse Pad - Alan Degarmo	43.38	2.14	45.52

Names	Units	Reservoir Water	Test Sep Oil	Test Sep Gas	Oil Flash	PW Tank Flash	Sales Gas	Sales Oil	Produced Water
Temperature	°F	62*	62*	62*	100*	80	75*	100	80#
Pressure	psia	314.7*	314.7*	314.7*	15.196	15.196	264.7*	15.196*	15.196*
Mole Fraction Vapor	%	0	0	99.977	100	100	100	0	0
Mole Fraction Light Liquid	%	100	100	0.023406	0	0	0	100	100
Mole Fraction Heavy Liquid	%	0	0	0	0	0	0	0	0
Molecular Weight	lb/lbmol	18.015	80.706	21.942	55.486	21.957	22.405	106.72	18.016
Molar Flow	lbmol/h	809.87	347.81	1427.4	2.8953	0.32816	1460.7	212.83	807.21
Mass Flow	lb/h	14590	28071	31320	160.65	7.2054	32727	22714	14542
Enthalpy	Btu/h	-9.973e+007	-2.7766e+007	-4.979e+007	-1.5108e+005	-12409	-5.1193e+007	-2.0627e+007	-9.9156e+007
Nitrogen(Mole Fraction)	%	0*	0.028*	0.552*	0.00045861	0.2799	0.54239	7.4685e-007	3.3077e-006
CO2(Mole Fraction)	%	0*	0.011*	0.112*	0.016055	0.96081	0.10553	0.00023046	0.00046059
C1(Mole Fraction)	%	0*	6.6979*	71.526*	0.97446	67.785	70.084	0.0047391	0.0016447
C2(Mole Fraction)	%	0*	10.944*	18.189*	10.662	18.328	18.371	0.28981	0.00051279
C3(Mole Fraction)	%	0*	13.88*	6.822*	30.463	7.364	7.3393	2.7426	0.00022141
Isobutane(Mole Fraction)	%	0*	2.495*	0.533*	6.9223	0.20194	0.60196	1.5062	2.1317e-006
n-Butane(Mole Fraction)	%	0*	10.341*	1.514*	27.255	1.2672	1.7964	8.3006	2.9697e-005
2,2-Dimethylpropane(Mole Fraction)	%	0*	0.187*	0*	0.3069	0.0055452	0.017287	0.12703	5.8394e-008
Isopentane(Mole Fraction)	%	0*	3.123*	0.183*	5.3765	0.10842	0.24163	3.9796	1.7136e-006
n-Pentane(Mole Fraction)	%	0*	6.2759*	0.284*	8.9181	0.16715	0.378	8.6081	2.6495e-006

Oil Flash Factor – 2.50 lb/bbl

Produced water – 0.05 lb/bbl

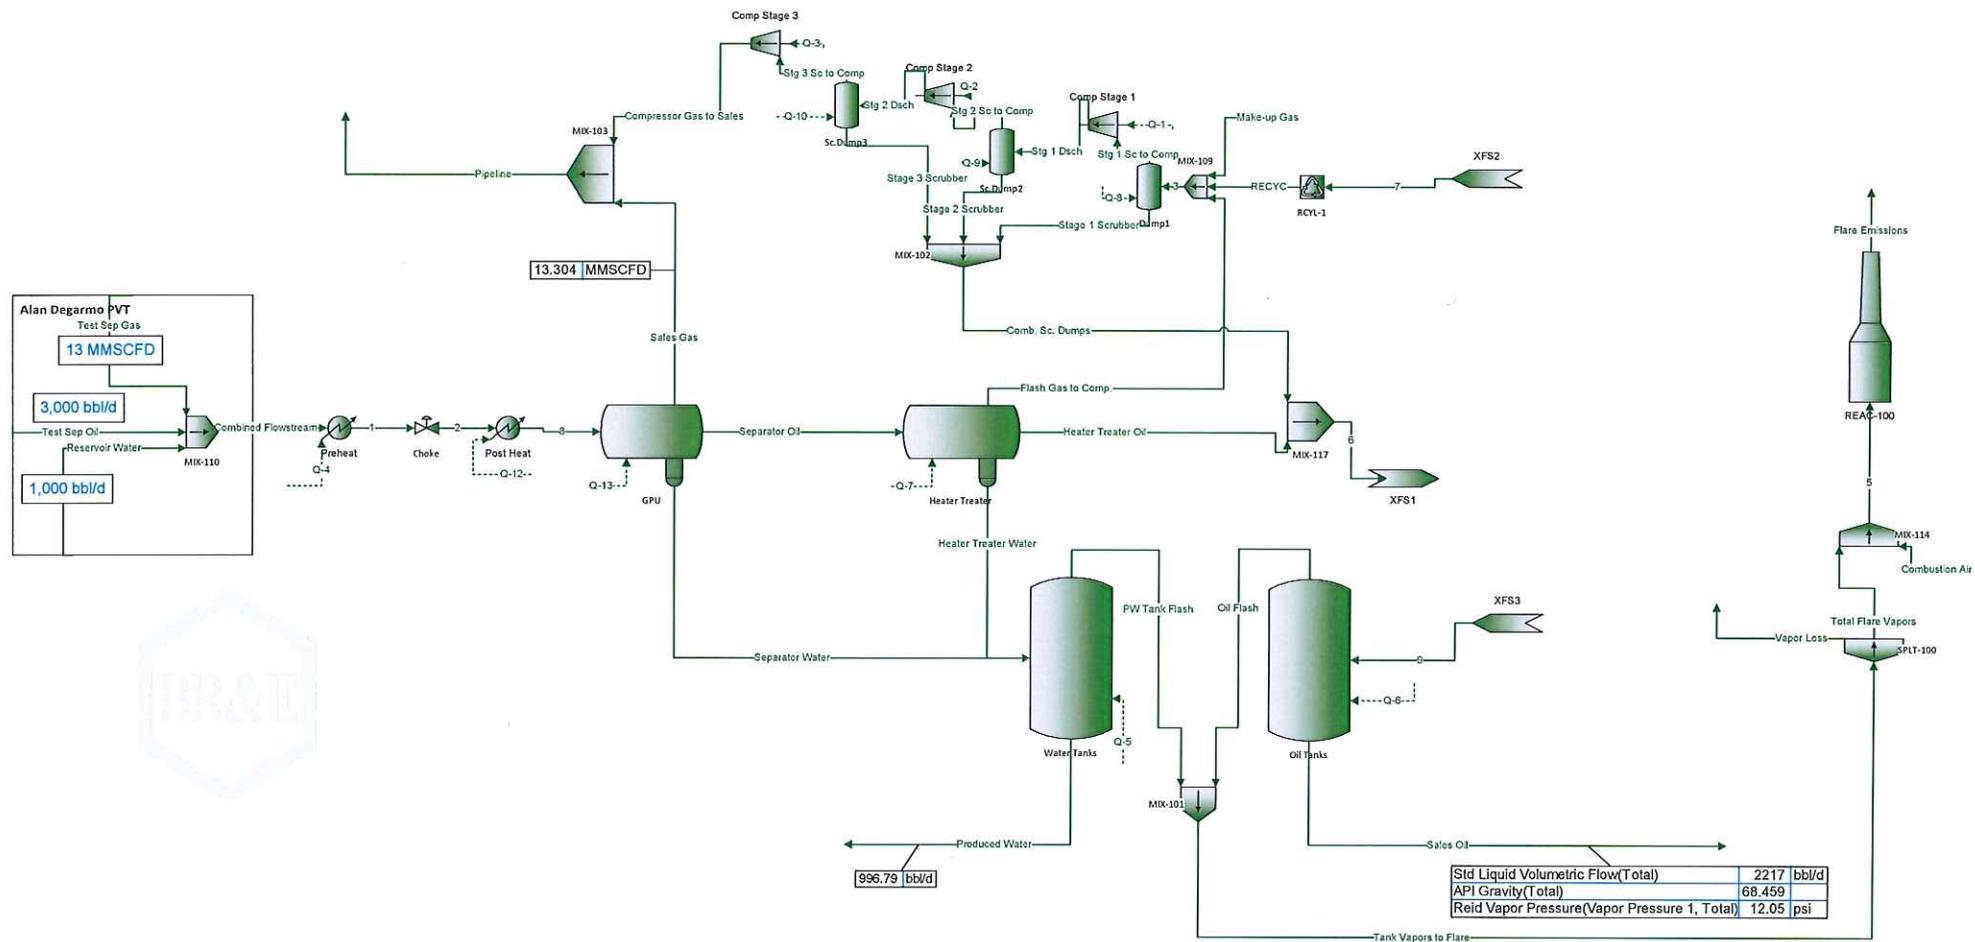

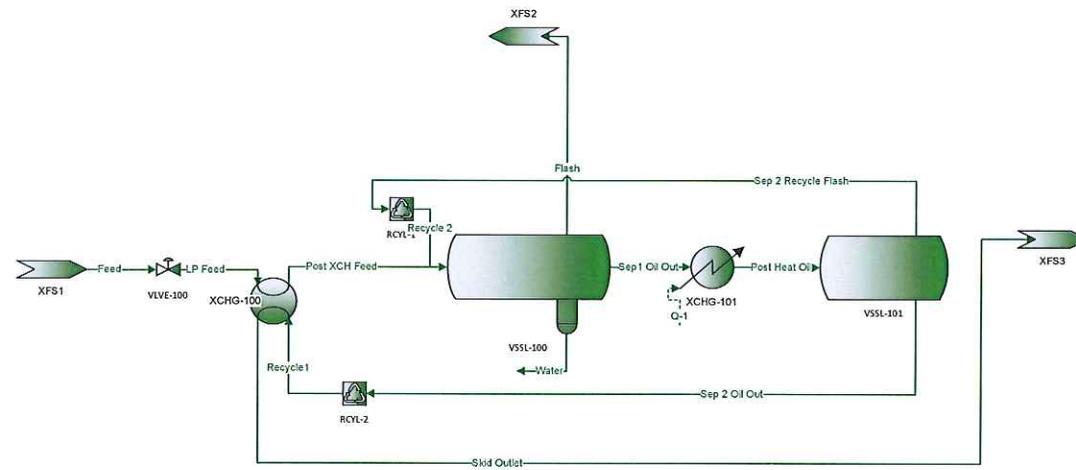

ATTACHMENT M: NATURAL GAS FIRED FUEL BURNING UNITS DATA SHEET

**ATTACHMENT M – SMALL HEATERS AND REBOILERS NOT SUBJECT TO
40CFR60 SUBPART DC
DATA SHEET**

Complete this data sheet for each small heater and reboiler not subject to 40CFR60 Subpart Dc at the facility. *The Maximum Design Heat Input (MDHI) must be less than 10 MMBTU/hr.*

Emission Unit ID#¹	Emission Point ID#²	Emission Unit Description (manufacturer, model #)	Year Installed/Modified	Type³ and Date of Change	Maximum Design Heat Input (MMBTU/hr)⁴	Fuel Heating Value (BTU/scf)⁵
EU-GPU1	EP-GPU1	Gas Production Unit Burner	TBD	New	1.0	905
EU-GPU2	EP-GPU2	Gas Production Unit Burner	TBD	New	1.0	905
EU-GPU3	EP-GPU3	Gas Production Unit Burner	TBD	New	1.0	905
EU-GPU4	EP-GPU4	Gas Production Unit Burner	TBD	New	1.0	905
EU-HT1	EP-HT1	Heater Treater	TBD	New	0.5	905
EU-HT2	EP-HT2	Heater Treater	TBD	New	0.5	905
EU-SH1	EP-SH1	Stabilizer Heater	TBD	New	1.5	905
EU-SH2	EP-SH2	Stabilizer Heater	TBD	New	1.5	905

¹ Enter the appropriate Emission Unit (or Source) identification number for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the Glycol Dehydration Unit Data Sheet.

² Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

³ New, modification, removal

⁴ Enter design heat input capacity in MMBtu/hr.

⁵ Enter the fuel heating value in BTU/standard cubic foot.

ATTACHMENT N: INTERNAL COMBUSTION ENGINE DATA SHEETS

ENGINE SPECIFICATION SHEETS
AP-42 AND EPA EMISSION FACTORS

ATTACHMENT N – INTERNAL COMBUSTION ENGINE DATA SHEET

Complete this data sheet for each internal combustion engine at the facility. Include manufacturer performance data sheet(s) or any other supporting document if applicable. Use extra pages if necessary. *Generator(s) and microturbine generator(s) shall also use this form.*

Emission Unit ID# ¹		EU-ENG1		EU-ENG2		EU-ENG3	
Engine Manufacturer/Model		Caterpillar G3306 NA		Caterpillar G3306 NA		Caterpillar G3406 NA	
Manufacturers Rated bhp/rpm		145-hp/1,800-rpm		145-hp/1,800-rpm		215-hp/1,800-rpm	
Source Status ²		NS		NS		NS	
Date Installed/ Modified/Removed/Relocated ³		TBD		TBD		TBD	
Engine Manufactured /Reconstruction Date ⁴		TBD		TBD		TBD	
Check all applicable Federal Rules for the engine (include EPA Certificate of Conformity if applicable) ⁵		<input checked="" type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input checked="" type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input checked="" type="checkbox"/> 40CFR60 Subpart JJJJ <input type="checkbox"/> JJJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources	
Engine Type ⁶		4SRB		4SRB		4SRB	
APCD Type ⁷		NSCR		NSCR		NSCR	
Fuel Type ⁸		RG		RG		RG	
H ₂ S (gr/100 scf)		Negligible		Negligible		Negligible	
Operating bhp/rpm		145-hp/1,800-rpm		145-hp/1,800-rpm		215-hp/1,800-rpm	
BSFC (BTU/bhp-hr)		8,625		8,625		7,767	
Hourly Fuel Throughput		1,382	ft ³ /hr gal/hr	1,382	ft ³ /hr gal/hr	1,845	ft ³ /hr gal/hr
Annual Fuel Throughput (Must use 8,760 hrs/yr unless emergency generator)		12.11	MMft ³ /yr gal/yr	12.11	MMft ³ /yr gal/yr	16.16	MMft ³ /yr gal/yr
Fuel Usage or Hours of Operation Metered		Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	
Calculation Methodology ⁹	Pollutant ¹⁰	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ₁₁	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ₁₁	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ₁₁
MD	NO _x	0.32	1.40	0.32	1.40	0.47	2.06
MD	CO	0.64	2.80	0.64	2.80	0.95	4.16
MD	VOC	0.24	1.05	0.24	1.05	0.36	1.58
AP	SO ₂	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
AP	PM ₁₀	0.01	0.04	0.01	0.04	0.02	0.07
MD	Formaldehyde	0.02	0.09	0.02	0.09	0.03	0.14
AP	Total HAPs	0.03	0.15	0.03	0.15	0.05	0.21
MD and EPA	GHG (CO ₂ e)	155.19	616.64	155.19	616.64	252.84	1,004.64

ATTACHMENT N – INTERNAL COMBUSTION ENGINE DATA SHEET

Complete this data sheet for each internal combustion engine at the facility. Include manufacturer performance data sheet(s) or any other supporting document if applicable. Use extra pages if necessary. *Generator(s) and microturbine generator(s) shall also use this form.*

Emission Unit ID# ¹	EU-ENG4						
Engine Manufacturer/Model	Zenith ZPP-644 4.4L						
Manufacturers Rated bhp/rpm	103.3-hp/3,000-rpm						
Source Status ²	NS						
Date Installed/ Modified/Removed/Relocated ³	TBD						
Engine Manufactured /Reconstruction Date ⁴	2014						
Check all applicable Federal Rules for the engine (include EPA Certificate of Conformity if applicable) ⁵	<input checked="" type="checkbox"/> 40CFR60 Subpart JJJ <input checked="" type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input checked="" type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJ <input type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		<input type="checkbox"/> 40CFR60 Subpart JJJ <input type="checkbox"/> JJJ Certified? <input type="checkbox"/> 40CFR60 Subpart IIII <input type="checkbox"/> IIII Certified? <input type="checkbox"/> 40CFR63 Subpart ZZZZ <input type="checkbox"/> NESHAP ZZZZ/ NSPS JJJ Window <input type="checkbox"/> NESHAP ZZZZ Remote Sources		
	Engine Type ⁶	4SRB					
APCD Type ⁷	NSCR						
Fuel Type ⁸	RG						
H ₂ S (gr/100 scf)	Negligible						
Operating bhp/rpm	103.3-hp/3,000-rpm						
BSFC (BTU/bhp-hr)	11,149						
Hourly Fuel Throughput	707	ft ³ /hr gal/hr		ft ³ /hr gal/hr		ft ³ /hr gal/hr	
Annual Fuel Throughput (Must use 8,760 hrs/yr unless emergency generator)	6.20	MMft ³ /yr gal/yr		MMft ³ /yr gal/yr		MMft ³ /yr gal/yr	
Fuel Usage or Hours of Operation Metered	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>		Yes <input type="checkbox"/>	No <input type="checkbox"/>	Yes <input type="checkbox"/>	No <input type="checkbox"/>
Calculation Methodology ⁹	Pollutant ¹⁰	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ₁₁	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ₁₁	Hourly PTE (lb/hr) ¹¹	Annual PTE (tons/year) ₁₁
MD	NO _x	0.46	2.01				
MD	CO	0.75	3.29				
MD	VOC	0.46	2.01				
AP	SO ₂	<0.01	<0.01				
AP	PM ₁₀	0.01	0.04				
MD	Formaldehyde	0.01	0.06				
AP	Total HAPs	0.02	0.09				
MD and EPA	GHG (CO ₂ e)	74.96	297.87				

1 Enter the appropriate Source Identification Number for each natural gas-fueled reciprocating internal combustion compressor/generator engine located at the compressor station. Multiple compressor engines should be designated CE-1, CE-2, CE-3 etc. Generator engines should be designated GE-1, GE-2, GE-3 etc. Microturbine generator engines should be designated MT-1, MT-2, MT-3 etc. If more than three (3) engines exist, please use additional sheets.

2 Enter the Source Status using the following codes:

NS	Construction of New Source (installation)	ES	Existing Source
MS	Modification of Existing Source	RS	Relocated Source
REM	Removal of Source		

- 3 Enter the date (or anticipated date) of the engine's installation (construction of source), modification, relocation or removal.
- 4 Enter the date that the engine was manufactured, modified or reconstructed.
- 5 Is the engine a certified stationary spark ignition internal combustion engine according to 40CFR60 Subpart IIII/JJJJ? If so, the engine and control device must be operated and maintained in accordance with the manufacturer's emission-related written instructions. You must keep records of conducted maintenance to demonstrate compliance, but no performance testing is required. If the certified engine is not operated and maintained in accordance with the manufacturer's emission-related written instructions, the engine will be considered a non-certified engine and you must demonstrate compliance as appropriate.

Provide a manufacturer's data sheet for all engines being registered.

- 6 Enter the Engine Type designation(s) using the following codes:

2SLB	Two Stroke Lean Burn	4SRB	Four Stroke Rich Burn
4SLB	Four Stroke Lean Burn		
- 7 Enter the Air Pollution Control Device (APCD) type designation(s) using the following codes:

A/F	Air/Fuel Ratio	IR	Ignition Retard
HEIS	High Energy Ignition System	SIPC	Screw-in Precombustion Chambers
PSC	Prestratified Charge	LEC	Low Emission Combustion
NSCR	Rich Burn & Non-Selective Catalytic Reduction	OxCat	Oxidation Catalyst
SCR	Lean Burn & Selective Catalytic Reduction		
- 8 Enter the Fuel Type using the following codes:

PQ	Pipeline Quality Natural Gas	RG	Raw Natural Gas /Production Gas	D	Diesel
----	------------------------------	----	---------------------------------	---	--------
- 9 Enter the Potential Emissions Data Reference designation using the following codes. Attach all reference data used.

MD	Manufacturer's Data	AP	AP-42	
GR	GRI-HAPCalc TM	OT	Other	(please list)
- 10 Enter each engine's Potential to Emit (PTE) for the listed regulated pollutants in pounds per hour and tons per year. PTE shall be calculated at manufacturer's rated brake horsepower and may reflect reduction efficiencies of listed Air Pollution Control Devices. Emergency generator engines may use 500 hours of operation when calculating PTE. PTE data from this data sheet shall be incorporated in the *Emissions Summary Sheet*.
- 11 PTE for engines shall be calculated from manufacturer's data unless unavailable.

**Engine Air Pollution Control Device
(Emission Unit ID# APC-NSCR-ENGINES, use extra pages as necessary)**

Air Pollution Control Device Manufacturer's Data Sheet included?
Yes No

NSCR SCR Oxidation Catalyst

Provide details of process control used for proper mixing/control of reducing agent with gas stream:

Manufacturer: TBD	Model #: TBD
Design Operating Temperature: 1,135 °F	Design gas volume: 1,018 scfm
Service life of catalyst:	Provide manufacturer data? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Volume of gas handled: acfm at °F	Operating temperature range for NSCR/Ox Cat: From 600 °F to 1250 °F
Reducing agent used, if any:	Ammonia slip (ppm):
Pressure drop against catalyst bed (delta P): inches of H ₂ O	

Provide description of warning/alarm system that protects unit when operation is not meeting design conditions:

Is temperature and pressure drop of catalyst required to be monitored per 40CFR63 Subpart ZZZZ?
 Yes No

How often is catalyst recommended or required to be replaced (hours of operation)?

How often is performance test required?
 Initial
 Annual
 Every 8,760 hours of operation
 Field Testing Required
 No performance test required. If so, why (please list any maintenance required and the applicable sections in NSPS/GACT,

G3306 NA

GAS COMPRESSION APPLICATION

GAS ENGINE SITE SPECIFIC TECHNICAL DATA



ENGINE SPEED (rpm):	1800	FUEL SYSTEM:	LPG IMPCO
COMPRESSION RATIO:	10.5:1	WITH CUSTOMER SUPPLIED AIR FUEL RATIO CONTROL	
JACKET WATER OUTLET (°F):	210	SITE CONDITIONS:	
COOLING SYSTEM:	JW+OC	FUEL:	Nat Gas
IGNITION SYSTEM:	MAG	FUEL PRESSURE RANGE (psig):	1.5-10.0
EXHAUST MANIFOLD:	WC	FUEL METHANE NUMBER:	84.8
COMBUSTION:	Catalyst	FUEL LHV (Btu/scf):	905
EXHAUST O2 EMISSION LEVEL %:	0.5	ALTITUDE (ft):	500
SET POINT TIMING:	30.0	MAXIMUM INLET AIR TEMPERATURE (°F):	77
		NAMEPLATE RATING:	145 bhp@1800rpm

RATING	NOTES	LOAD	MAXIMUM RATING	SITE RATING AT MAXIMUM INLET AIR TEMPERATURE		
			100%	100%	75%	50%
ENGINE POWER	(1)	bhp	145	145	109	72
INLET AIR TEMPERATURE		°F	77	77	77	77

ENGINE DATA						
FUEL CONSUMPTION (LHV)	(2)	Btu/bhp-hr	7775	7775	8318	9509
FUEL CONSUMPTION (HHV)	(2)	Btu/bhp-hr	8625	8625	9227	10548
AIR FLOW	(3)(4)	lb/hr	922	922	739	556
AIR FLOW WET (77°F, 14.7 psia)	(3)(4)	scfm	208	208	167	125
INLET MANIFOLD PRESSURE	(5)	in Hg(abs)	26.2	26.2	21.8	17.6
EXHAUST STACK TEMPERATURE	(6)	°F	1101	1101	1067	1037
EXHAUST GAS FLOW (@ stack temp, 14.5 psia)	(7)(4)	ft3/min	678	678	532	393
EXHAUST GAS MASS FLOW	(7)(4)	lb/hr	978	978	784	590

EMISSIONS DATA						
NOx (as NO2)	(8)	g/bhp-hr	13.47	13.47	12.15	9.76
CO	(8)	g/bhp-hr	13.47	13.47	11.44	9.56
THC (mol. wt. of 15.84)	(8)	g/bhp-hr	2.20	2.20	2.49	3.22
NMHC (mol. wt. of 15.84)	(8)	g/bhp-hr	0.33	0.33	0.37	0.48
NMNEHC (VOCs) (mol. wt. of 15.84)	(8)(9)	g/bhp-hr	0.22	0.22	0.25	0.32
HCHO (Formaldehyde)	(8)	g/bhp-hr	0.27	0.27	0.31	0.33
CO2	(8)	g/bhp-hr	485	485	525	601
EXHAUST OXYGEN	(10)	% DRY	0.5	0.5	0.5	0.5

HEAT REJECTION						
HEAT REJ. TO JACKET WATER (JW)	(11)	Btu/min	6049	6049	5237	4455
HEAT REJ. TO ATMOSPHERE	(11)	Btu/min	751	751	602	459
HEAT REJ. TO LUBE OIL (OC)	(11)	Btu/min	990	990	857	729

HEAT EXCHANGER SIZING CRITERIA			
TOTAL JACKET WATER CIRCUIT (JW+OC)	(12)	Btu/min	7842

CONDITIONS AND DEFINITIONS

Engine rating obtained and presented in accordance with ISO 3046/1, adjusted for fuel, site altitude and site inlet air temperature.
 100% rating at maximum inlet air temperature is the maximum engine capability for the specified fuel at site altitude and maximum site inlet air temperature.
 Max. rating is the maximum capability for the specified fuel at site altitude and reduced inlet air temperature.
 Lowest load point is the lowest continuous duty operating load allowed. No overload permitted at rating shown.

For notes information consult page three.



Prepared For:

Jason Stinson
MIDCON COMPRESSION, LP

MANUFACTURED ON OR AFTER 1/1/2011

INFORMATION PROVIDED BY CATERPILLAR

Engine: G3306 NA
Horsepower: 145
RPM: 1800
Compression Ratio: 10.5:1
Exhaust Flow Rate: 678 CFM
Exhaust Temperature: 1101 °F
Reference: DM5053-07
Fuel: Natural Gas
Annual Operating Hours: 8760

Uncontrolled Emissions

NOx: 13.47 g/bhp-hr
CO: 13.47 g/bhp-hr
THC: 2.20 g/bhp-hr
NMHC: 0.33 g/bhp-hr
NMNEHC: 0.22 g/bhp-hr
HCHO: 0.27 g/bhp-hr
Oxygen: 0.50 %

POST CATALYST EMISSIONS

NOx: <1.0 g/bhp-hr
CO: <2.0 g/bhp-hr
VOC: <0.7 g/bhp-hr

CONTROL EQUIPMENT

Catalytic Converter

Model: **EAH-1200T-0404F-21CEE**
Catalyst Type: NSCR, Precious group metals
Manufacturer: EMIT Technologies, Inc.
Element Size: Round 12 x 3.5
Catalyst Elements: 1
Housing Type: 2 Element Capacity
Catalyst Installation: Accessible Housing
Construction: 10 gauge Carbon Steel
Sample Ports: 6 (0.5" NPT)
Inlet Connections: 4" Flat Face Flange
Outlet Connections: 4" Flat Face Flange
Configuration: End In / End Out
Silencer: Integrated
Silencer Grade: Hospital
Insertion Loss: 35-40 dBA

Air Fuel Ratio Controller


Model: **ENG-S-075-T**
Manufacturer: EMIT Technologies, Inc.
Description: EDGE NG Air Fuel Ratio Controller
4-Wire Narrowband O2 Sensor
Digital Power Valve
O2 Sensor Weldment
Wiring Harness
(2) 25' Type K Thermocouple
Digital Power Valve Size: 0.75" NPT



G3406 Gas Petroleum Engine

160-272 kW
(215-365 bhp)
1800 rpm

0.5% O₂ and 2.0% O₂ Ratings

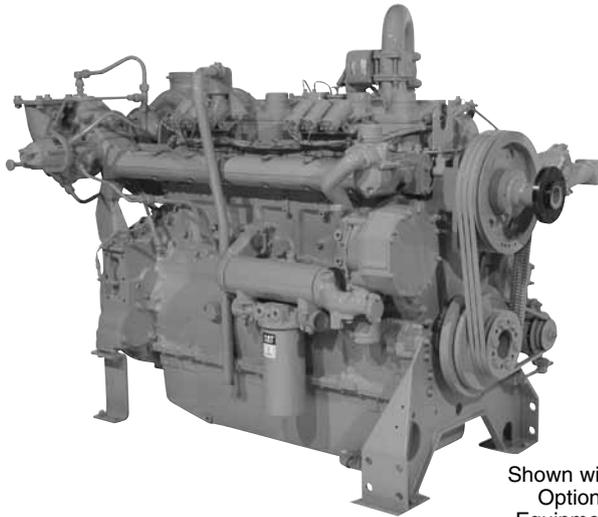

Shown with
Optional
Equipment

CAT® ENGINE SPECIFICATIONS

In-line 6, 4-Stroke-Cycle

Emissions Settings	0.5% O ₂ and 2.0% O ₂
Bore	137 mm (5.4 in.)
Stroke	165 mm (6.5 in.)
Displacement	14.59 L (891 cu. in.)
Aspiration	Naturally Aspirated or Turbocharged-Aftercooled
Governor and Protection	Woodward PSG
Combustion	Rich Burn
Engine Weight, net dry (approx)	1360.8 kg (3000 lb)
Power Density	6.7 kg/kW (11 lb/bhp)
Power per Displacement	18.6 bhp/L
Total Cooling System Capacity	37.9 L (10 gal)
Jacket Water	30.3 L (8 gal)
SCAC	7.6 L (2 gal)
Lube Oil System (refill)	75.7 L (20 gal)
Oil Change Interval	750 hours
Rotation (from flywheel end)	Counterclockwise
Flywheel and Flywheel Housing	SAE No. 1
Flywheel Teeth	113

FEATURES

Engine Design

- Proven reliability and durability
- Ability to burn a wide spectrum of gaseous fuels
- Robust diesel strength design prolongs life and lowers owning and operating costs
- Broad operating speed range

Emissions

- Rich burn engine design easily meets emission requirements
- 0.5% O₂ rating meets U.S. EPA Spark Ignited Stationary NSPS Emissions for 2007/8 and 2010/11 with the use of aftermarket AFRC and TWC

Full Range of Attachments

Large variety of factory-installed engine attachments reduces packaging time

Testing

Every engine is full-load tested to ensure proper engine performance.

Gas Engine Rating Pro

GERP is a PC-based program designed to provide site performance capabilities for Cat® natural gas engines for the gas compression industry. GERP provides engine data for your site's altitude, ambient temperature, fuel, engine coolant heat rejection, performance data, installation drawings, spec sheets, and pump curves.

Product Support Offered Through Global Cat Dealer Network

More than 2,200 dealer outlets

Cat factory-trained dealer technicians service every aspect of your petroleum engine

Cat parts and labor warranty

Preventive maintenance agreements available for repair-before-failure options

S•O•SSM program matches your oil and coolant samples against Caterpillar set standards to determine:

- Internal engine component condition
- Presence of unwanted fluids
- Presence of combustion by-products
- Site-specific oil change interval

Over 80 Years of Engine Manufacturing Experience

Over 60 years of natural gas engine production

Ownership of these manufacturing processes enables Caterpillar to produce high quality, dependable products.

- Cast engine blocks, heads, cylinder liners, and flywheel housings
- Machine critical components
- Assemble complete engine

Web Site

For all your petroleum power requirements, visit www.catoilandgas.cat.com.



STANDARD EQUIPMENT

Air Inlet System

Air cleaner — heavy-duty
Air cleaner rain cap
Service indicator

Control System

Governor — Woodward PSG mechanical
Governor locking — positive control

Cooling System

Thermostats and housing
Jacket water pump
Aftercooler water pump
Aftercooler core

Exhaust System

Watercooled exhaust manifolds
Dry exhaust elbow

Flywheel & Flywheel Housing

SAE No. 1 flywheel
SAE No. 1 flywheel housing
SAE standard rotation

Fuel System

Gas pressure regulator
Natural gas carburetor

Ignition System

Altronic III ignition system

Instrumentation

Service meter

Lube System

Crankcase breather — top mounted
Oil cooler
Oil filter — RH
Auxiliary oil reservoir
Oil pan — full sump
Oil filler in valve cover, dipstick — RH

Mounting System

Engine supports

Protection System

Shutoffs

General

Paint — Cat yellow
Crankshaft vibration damper and drive pulleys
Lifting eyes

OPTIONAL EQUIPMENT

Air Inlet System

Precleaner

Charging System

Battery chargers
Charging alternators
Charging alternators f/u/w c customer supplied shutoffs
Ammeter gauge
Ammeter gauge and wiring
Control mounting

Control System

PSG Woodward governor

Cooling System

Radiators
Non-sparking blower fan
Blower fans for customer supplied radiators
Fan drives for customer supplied radiators
ATAAC conversion
Aftercooler
Expansion tank
Heat exchangers

Exhaust System

Flexible fittings
Elbow
Flange
Pipe
Rain cap
Muffler

Fuel System

Fuel filter
Natural gas valve and jet kits

Ignition System

CSA shielded ignition
Wiring harness

Instrumentation

Gauges and instrument panels

Lube System

Auxiliary oil reservoir removal
Lubricating oil

Mounting System

Vibration isolators

Power Take-Offs

Auxiliary drive pulleys
Enclosed clutch and clutch support
Front stub shaft and flywheel stub shaft

Protection System

Gas valves

Starting System

Air starting motor
Electric air start control
Air pressure regulator
Air silencer
Electric starting motor — single 12- and 24-volt
Starting aids
Battery sets, cables, and rack

General

Damper guard


**TECHNICAL DATA****G3406 Gas Petroleum Engine — 1800 rpm**

		DM5302-01	TM8513-05	DM5084-03
Engine Power				
@ 100% Load	bkW (bhp)	242 (325)	160 (215)	205 (276)
@ 75% Load	bkW (bhp)	192 (244)	120 (161)	154 (207)
Engine Speed				
	rpm	1800	1800	1800
Max Altitude @ Rated Torque and 38°C (100°F)	m (ft)	1219.2 (4000)	0	914.4 (3000)
Speed Turndown @ Max Altitude, Rated Torque, and 38°C (100°F)	%	55	45	0
SCAC Temperature				
	°C (°F)	54 (130)	—	—
Emissions*				
NOx	g/bkW-hr (g/bhp-hr)	35.29 (26.31)	37.47 (27.94)	20.69 (15.43)
CO	g/bkW-hr (g/bhp-hr)	2.15 (1.6)	1.9 (1.4)	20.69 (15.42)
CO ₂	g/bkW-hr (g/bhp-hr)	620 (463)	685 (511)	699 (521)
VOC**	g/bkW-hr (g/bhp-hr)	0.21 (.16)	0.24 (0.18)	—
Fuel Consumption***				
@ 100% Load	MJ/bkW-hr (Btu/bhp-hr)	9.96 (7037)	10.99 (7767)	10.49 (7418)
@ 75% Load	MJ/bkW-hr (Btu/bhp-hr)	10.53 (7443)	11.75 (8304)	11.44 (8082)
Heat Balance				
Heat Rejection to Jacket Water				
@ 100% Load	bkW (Btu/min)	200 (11,401)	160 (9081)	223 (12,709)
@ 75% Load	bkW (Btu/min)	173 (9822)	138 (7868)	178 (10,156)
Heat Rejection to Aftercooler				
@ 100% Load	bkW (Btu/min)	12.6 (716)	—	6.53 (372)
@ 75% Load	bkW (Btu/min)	7.9 (450)	—	3.86 (220)
Heat Rejection to Exhaust				
@ 100% Load	bkW (Btu/min)	161 (9180)	128 (7292)	140 (7991)
@ 75% Load	bkW (Btu/min)	125 (7091)	99 (5636)	105 (6022)
Exhaust System				
Exhaust Gas Flow Rate				
@ 100% Load	m ³ /min (cfm)	38.74 (1368)	30.04 (1061)	33.1 (1168)
@ 75% Load	m ³ /min (cfm)	30.33 (1071)	23.84 (842)	25.4 (900)
Exhaust Stack Temperature				
@ 100% Load	°C (°F)	526 (978)	560 (1040)	540 (1004)
@ 75% Load	°C (°F)	512 (953)	535 (995)	505 (942)
Intake System				
Air Inlet Flow Rate				
@ 100% Load	m ³ /min (scfm)	13 (459)	9.68 (342)	10.84 (383)
@ 75% Load	m ³ /min (scfm)	10.36 (366)	7.93 (280)	8.72 (308)
Gas Pressure				
	kPag (psig)	137-145 (19.9-21)	10.34-34.47 (1.5-5)	10.24-34.47 (1.5-5)

*at 100% load and speed, all values are listed as not to exceed

**Volatile organic compounds as defined in U.S. EPA 40 CFR 60, subpart JJJJ

***ISO 3046/1

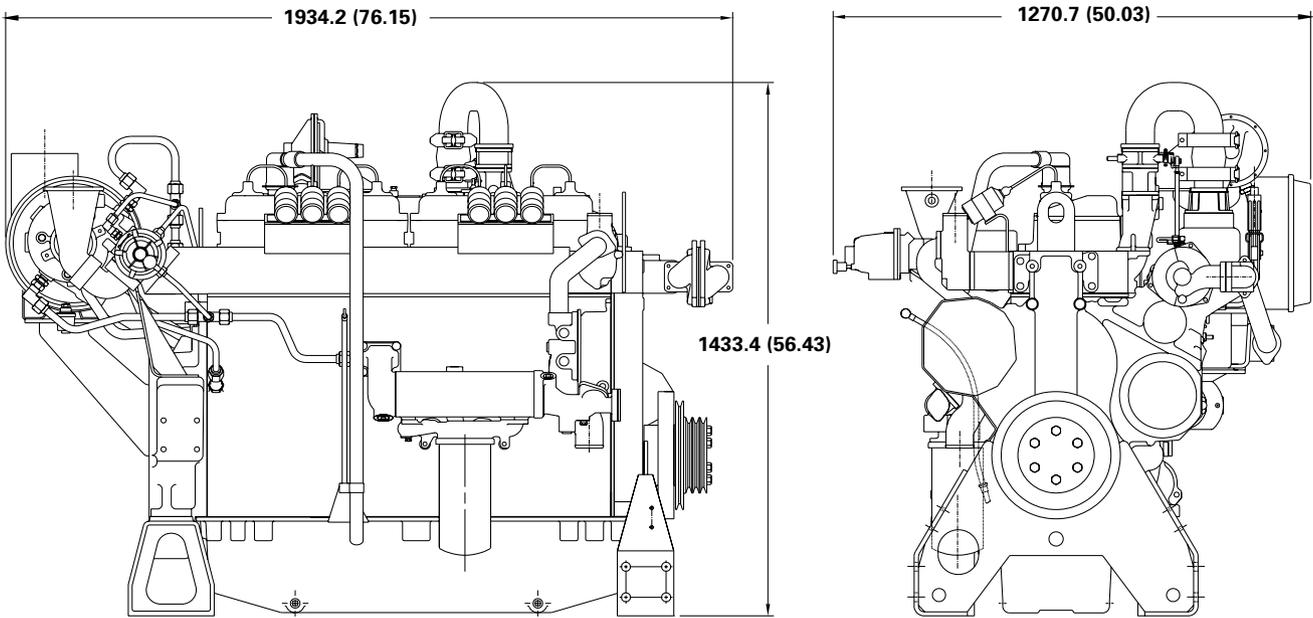GAS PETROLEUM ENGINE


PACKAGE DIMENSIONS		
Length	mm (in.)	1934.2 (76.15)
Width	mm (in.)	1270.7 (50.03)
Height	mm (in.)	1433.4 (56.43)
Shipping Weight	kg (lb)	1360.8 (3000)

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Dimensions are in mm (inches).

RATING DEFINITIONS AND CONDITIONS

Engine performance is obtained in accordance with SAE J1995, ISO3046/1, BS5514/1, and DIN6271/1 standards.

Transient response data is acquired from an engine/generator combination at normal operating temperature and in accordance with ISO3046/1 standard ambient conditions. Also in accordance with SAE J1995, BS5514/1, and DIN6271/1 standard reference conditions.

Conditions: Power for gas engines is based on fuel having an LHV of 33.74 kJ/L (905 Btu/cu ft) at 101 kPa (29.91 in. Hg) and 15° C (59° F). Fuel rate is based on a cubic meter at 100 kPa (29.61 in. Hg) and 15.6° C (60.1° F). Air flow is based on a cubic foot at 100 kPa (29.61 in. Hg) and 25° C (77° F). Exhaust flow is based on a cubic foot at 100 kPa (29.61 in. Hg) and stack temperature.

Materials and specifications are subject to change without notice. The International System of Units (SI) is used in this publication. CAT, CATERPILLAR, their respective logos, S•O•S, "Caterpillar Yellow" and the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.



Prepared For:
 Derek Pearce
 MIDCON COMPRESSION, LP

Manufactured on or after 1/1/2011

QUOTE: QUO-13721-T4F3

INFORMATION PROVIDED BY CATERPILLAR

Engine:	G3406 NA
Horsepower:	215
RPM:	1800
Compression Ratio:	10.3
Exhaust Flow Rate:	1018 CFM
Exhaust Temperature:	1135 °F
Reference:	N/A
Fuel:	Natural Gas
Annual Operating Hours:	8760

Uncontrolled Emissions

	<u>g/bhp-hr</u>
NOx:	16.52
CO:	16.52
THC:	2.08
NMHC:	0.31
NMNEHC:	0.21
HCHO:	0.27
O2:	0.40 %

POST CATALYST EMISSIONS

	<u>% Reduction</u>	<u>g/bhp-hr</u>
NOx:	>94 %	<1.00
CO:	>88 %	<2.00
VOC:	---	<0.70
HCHO:	>76 %	<0.06

CONTROL EQUIPMENT

Catalyst Element

Model:	RE-1450-T
Catalyst Type:	NSCR, Standard Precious Group Metals
Substrate Type:	BRAZED
Manufacturer:	EMIT Technologies, Inc
Element Quantity:	1
Element Size:	Round 14.5" x 3.5"

WARRANTY

EMIT Technologies, Inc. warrants that the goods supplied will be free from defects in workmanship by EMIT Technologies, Inc. for a period of two (2) years from date of shipment. EMIT Technologies, Inc. will not be responsible for any defects which result from improper use, neglect, failure to properly maintain or which are attributable to defects, errors or omissions in any drawings, specifications, plans or descriptions, whether written or oral, supplied to EMIT Technologies, Inc. by Buyer.

Catalyst performance using an EMIT Air/Fuel ratio controller is dependent upon properly defined set-points, variable with engine and fuel gas composition. Air/fuel ratio controller performance is guaranteed, but not limited, to fuel gas with a HHV content of 1400 BTU/SCF.

Catalyst performance will be guaranteed for a period of 1 year from installation, or 8760 operating hours, whichever comes first. The catalyst shall be operated with an automatic air/fuel ratio controller. The performance guarantee shall not cover the effects of excessive ash masking due to operation at low load, improper engine maintenance, or inappropriate lubrication oil. The performance guarantee shall not cover the effects of continuous engine misfires (cylinder or ignition) exposing the catalyst to excessive exothermic reaction temperatures. In most cases, excluding thermal deactivation, catalyst performance is redeemable by means of proper washing (refer to EMIT Catalyst/Silencer Housing Manual for element wash information, or contact a local EMIT Sales representative).

The exhaust temperature operating range at the converter inlet is a minimum of 600°F for oxidation catalyst and 750 °F for NSCR catalyst, and a maximum of 1250°F.

If a properly functioning, high temperature shut down switch is not installed, thermal deactivation of catalyst at sustained temperatures above 1250°F is not covered. If excessive exposure to over oxygenation of NSCR catalyst occurs due to improperly functioning or non-existent Air/Fuel ratio control, then deactivation of catalyst is not warranted.

The catalyst conversion efficiencies (% reduction) will be guaranteed for engine loads of 50 to 100 percent. Standard Oxidation Catalyst conversion efficiencies (% reduction) will be guaranteed for fuel gas containing less than 1.5% mole fraction of non-methane, non-ethane hydrocarbons. Applications where fuel gas exceeds this level will require a Premium Oxidation Catalyst to maintain guaranteed VOC conversion efficiencies.

Engine lubrication oil shall contain less than 0.5 wt% Sulfated Ash with a maximum allowable specific oil consumption of 0.7 g/bhp-hr. The catalyst shall be limited to a maximum ash loading of 0.022 lb/ft³. Phosphorous and zinc additives are limited to 0.03 wt%. New or Reconstructed engines must operate for a minimum of 100 hours prior to catalyst installation, otherwise the warranty is void.

The catalyst must not be exposed to the following known poisoning agents, including: antimony, arsenic, chromium, copper, iron, lead, lithium, magnesium, mercury, nickel, phosphorous, potassium, silicon, sodium, sulfur, tin, and zinc. Total poison concentrations in the fuel gas must be limited to 0.25 ppm or less for catalyst to function properly.

Shipment - Promised shipping dates are approximate lead times from the point of manufacture and are not guaranteed. EMIT Technologies, Inc. will not be liable for any loss, damage or delay in manufacture or delivery resulting from any cause beyond its control including, but not limited to a period equal to the time lost by reason of that delay. All products will be crated as per best practice to prevent any damage during shipment. Unless otherwise specified, Buyer will pay for any special packing and shipping requirements. Acceptance of goods by common carrier constitutes delivery to Buyer. EMIT Technologies, Inc. shall not be responsible for goods damaged or lost in transit.

Terms: Credit is extended to purchaser for net 30 time period. If payment is not received in the net 30 timeframe, interest on the unpaid balance will accrue at a rate of 1.5% per month from the invoice date.

Order Cancellation Terms: Upon cancellation of an order once submittal of a Purchase Order has occurred, the customer will pay a 25% restocking fee for Catalyst Housings, Catalyst Elements, and Air/Fuel Ratio Controllers; 50% restocking fee for Cooler Top Solutions Exhaust System Accessories, and other Custom Built Products; 100% of all associated shipping costs incurred by EMIT; 100% of all project expenses incurred by EMIT for Field Services.



ABOUT ZPP

ENGINE MODELS

- Model 410
- Model 416
- Model 420
- Model 428
- Model 644**

EPA/CARB EMISSIONS

DISTRIBUTORS

NEWS

CONTACT US



DUAL FUEL/GASOLINE & NATURAL GAS

4.4 Liter

For Industrial Application

ZPP 644



[click to enlarge >](#)


SPECIFICATION DATA

Intermittent output	139 HP/3,000 rpm
Continuous output	104 HP/3,000 rpm
Peak torque	246 ft-lbs/2,200 rpm
Fuel and type	Gasoline / Multi-port - LPG/NG mixer type
Engine configuration	6 Cylinder in-line, OHV
Block Material / Head Material	Cast Iron / Cast Iron
Bore x stroke (mm)	98.4 x 91.0
Total piston displacement	4416 cc
Compression ratio	9.7:1
Length x width x height (mm)	1054 x 586 x 810
Dry weight (excluding shipped lose parts)	193 Kg
Catalyst (2007 emmissions compliance)	Remote mounted

Note: HP and Torque figures shown for 2008 LSI - EPA/CARB certified engine with catalyst.

PERFORMANCE CURVES

ZPP-644 Gasoline Power, Torque, & BSFC Curves

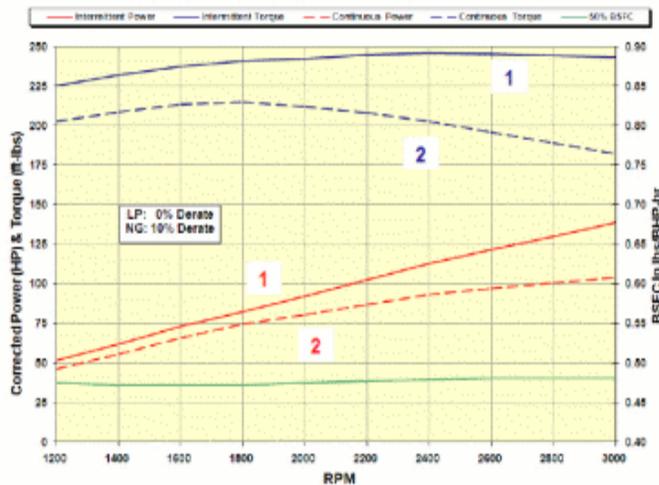

Curve 1 - Intermittent Gross Output

This is the highest out put obtainable at standard ambient conditions from a basic engine equipped only with the built-in accessories essential to its operation. These levels may be only maintained for operating periods of short duration.

Applications: Scissor lifts, Aerial platforms, Scrubbers / Sweepers, Utility vehicles, Construction equipment

Curve 2 - Continuous Gross Output

This is the output that can be obtained at standard ambient conditions from a basic engine, operating in a continuous duty mode.

Applications: Generator, Welders, Water pumps, Gas compressors, Carpet cleaners, etc

Actual power levels may vary depending on OEM calibration and application.

[back to top >](#)

ENGINE SPECIFICATIONS

General

Cylinders	6
Cylinder Arrangement	Vertical in-line
Bore	3.94 in / 98.43 mm
Stroke	3.64 in / 90.98 mm
Cylinder Displacement	42.24 cu in / 692.3 cc
Total Displacement	269.6 cu in / 4416 cc
Compression Ratio	9.7:1

Fuel System

Gasoline Multi-port	
LPG / NG	Mixer Type
Fuel Pressure (gasoline)	3 bar
Fuel Pressure LPG / NG	<5 in
Fuel Requirement	unleaded gasoline
Fuel Pump	Electric
Electronic Governor	ZEEMS III

Physical Data

Length	41.5 in / 1054.0 mm
Width	23.1 in / 586.0 mm
Height	31.9 in / 810.0 mm
Weight	470 lb / 214.0 kg
Oil Capacity	6.0 qt / 5.7 L


Electrical

Starter Motor	12 V - 1.4 Kw
Alternator	12 V - 55 A w/ built in regulator
DIS Ignition	Computer Controlled
Distributor with coil	Non-certified applications
Hall effect dist. w/ coil	Certified applications

Cooling

Thermostat	180°F / 82 °C
------------	---------------

[back to top >](#)

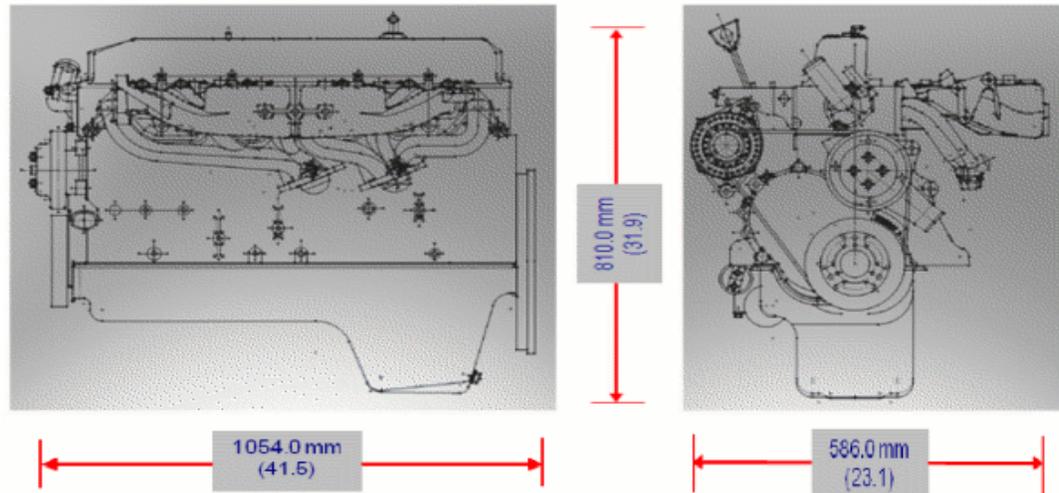

DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

[back to top >](#)


Copyright ©2004 Zenith Power Products LLC. All Rights Reserved.

HY-BON/EDI VRU Packages w/ HP Ratings


Compressor	Engine	Max HP Natural Gas	EPA Certified
Blackmer 372	Kubota 3 Cylinder	24 HP @ 3600 RPM	Yes
Blackmer 612	Zenith 2.8 L 4 Cylinder	54 HP @ 2200 RPM	Yes
Blackmer 942	Zenith 4.4 L 6 Cylinder	77 HP @ 2200 RPM	Yes
Blackmer 362	Kubota 3 Cylinder	24 HP @ 3600 RPM	Yes
Blackmer 602	Zenith 4.4 L 6 Cylinder	77 HP @ 2200 RPM	Yes
Blackmer 162	Kubota 3 Cylinder	24 HP @ 3600 RPM	Yes
NK-60 (Rotocomp)	Kubota 3 Cylinder	24 HP @ 3600 RPM	Yes
NK-100 (Rotocomp)	Zenith 4.4 L 6 Cylinder	77 HP @ 2200 RPM	Yes

** See fuel rates in tabs below for desired Engines **

**ZPP 644 Natural Gas Mass Fuel Fuel Flow - Corrected per SAE J1349
6/7/10**

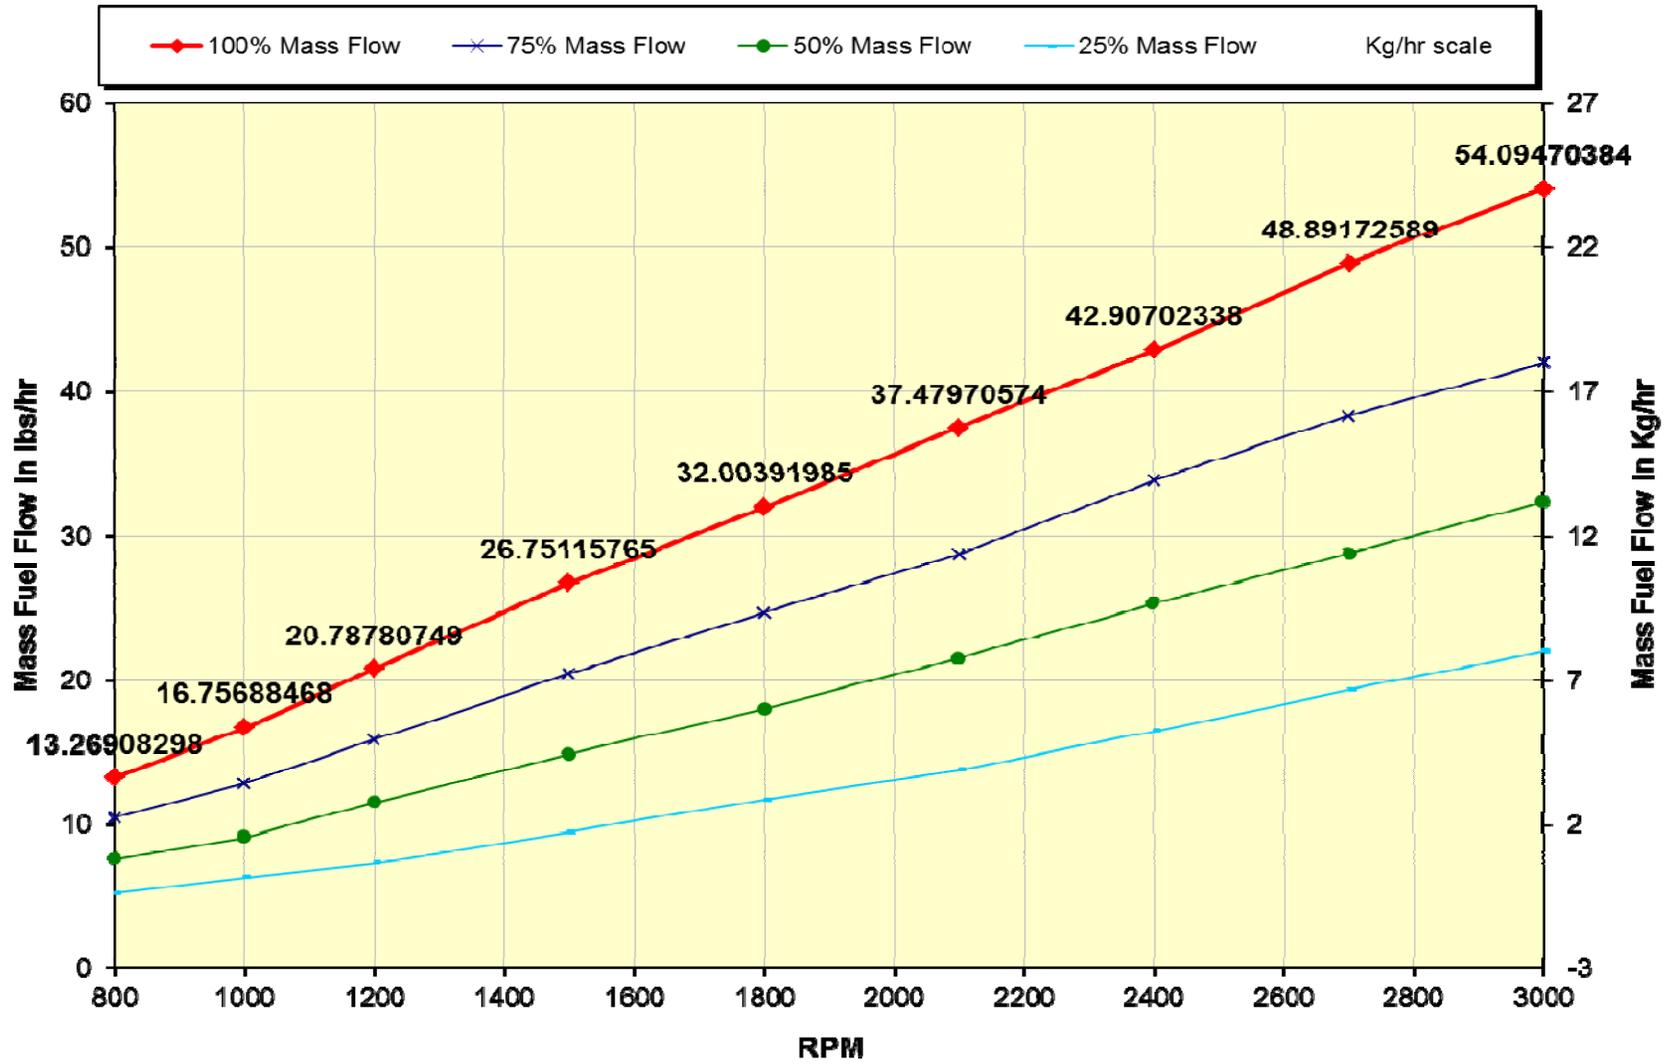

**ZPP 428 NG Mass Fuel Fuel Flow - Corrected per SAE J1349
5/11/10**

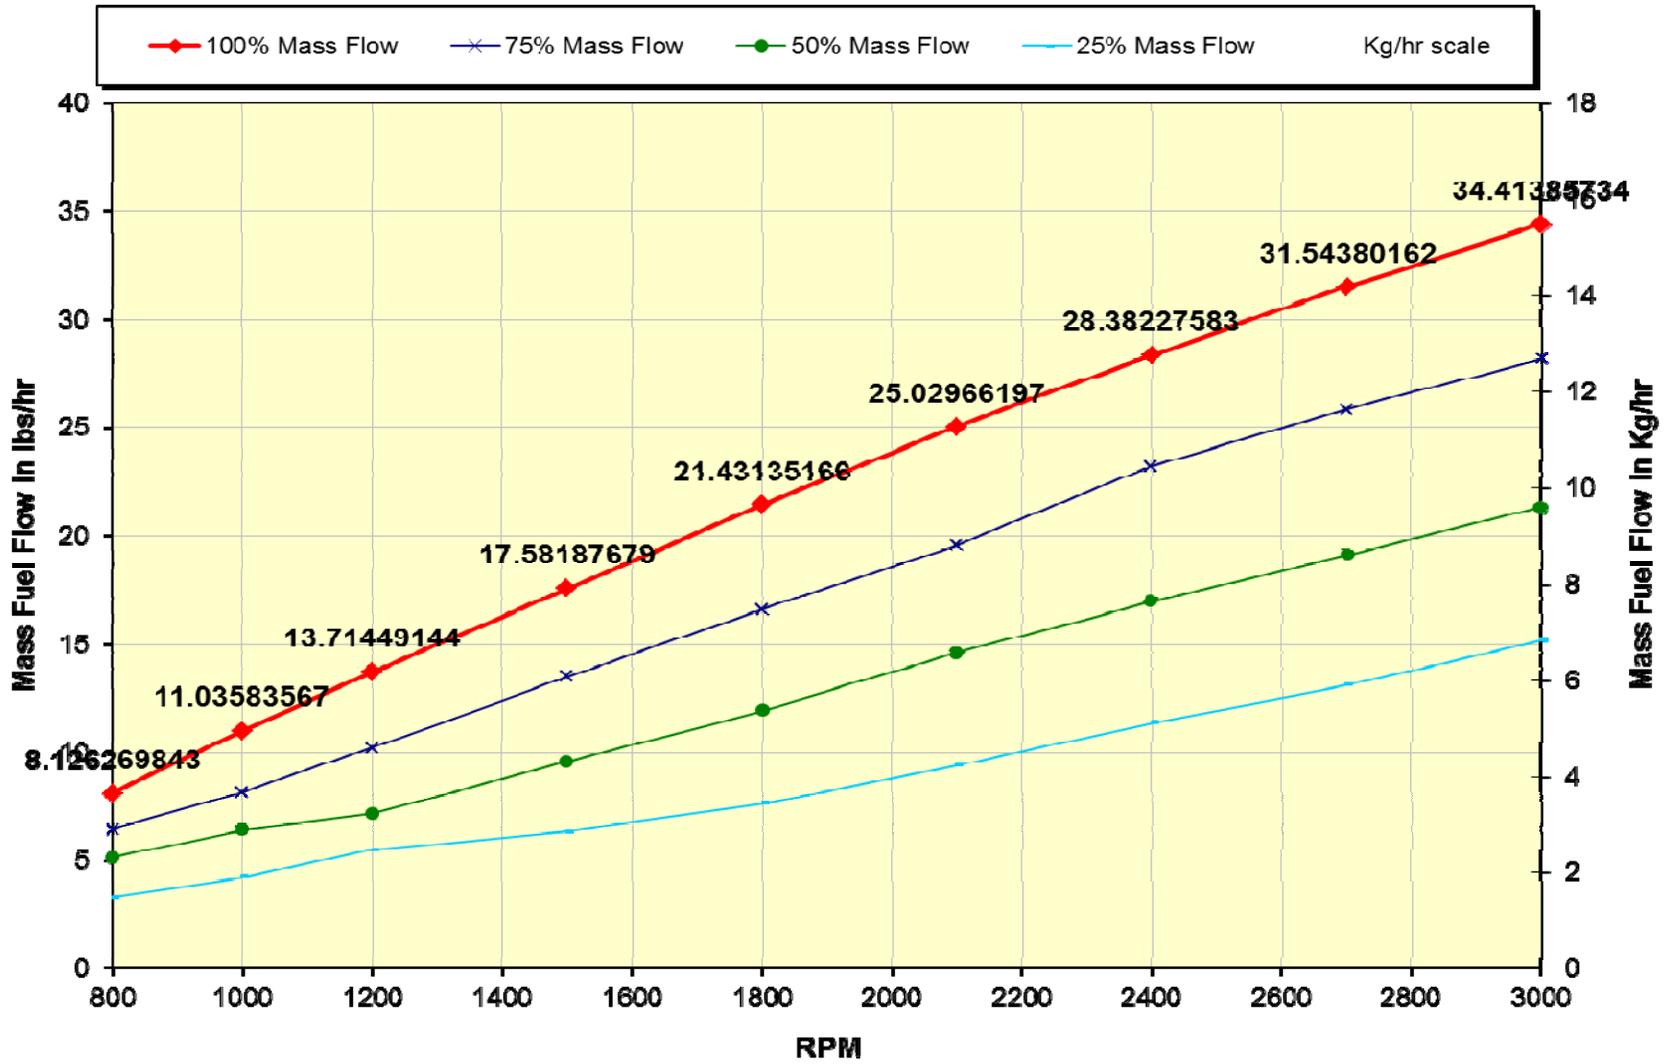



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
2014 MODEL YEAR
CERTIFICATE OF CONFORMITY
WITH THE CLEAN AIR ACT OF 1990

**OFFICE OF TRANSPORTATION
 AND AIR QUALITY
 ANN ARBOR, MICHIGAN 48105**

Certificate Issued To: Zenith Power Products
 (U.S. Manufacturer or Importer)
Certificate Number: EZPPB04.4P44-005

Effective Date:
 02/10/2014
Expiration Date:
 12/31/2014

Byron J. Bunker, Division Director
 Compliance Division

Issue Date:
 02/10/2014
Revision Date:
 N/A

Manufacturer: Zenith Power Products
Engine Family: EZPPB04.4P44
Certification Type: Mobile and Stationary
Fuel : Natural Gas (CNG/LNG)
 LPG/Propane
 Gasoline (up to and including 10% Ethanol)
Emission Standards : CO (g/kW-hr) : 4.4
 NMHC + NOx (g/kW-hr) : 2.7
 HC + NOx (g/kW-hr) : 2.7CO (g/kW-hr) : 4.4
 NMHC + NOx (g/kW-hr) : 2.7
 HC + NOx (g/kW-hr) : 2.7
Emergency Use Only : N

Pursuant to Section 213 of the Clean Air Act (42 U.S.C. section 7547) and 40 CFR Part 1048, 40 CFR Part 60, 1065, 1068, and 60 (stationary only and combined stationary and mobile) and subject to the terms and conditions prescribed in those provisions, this certificate of conformity is hereby issued with respect to the test engines which have been found to conform to applicable requirements and which represent the following nonroad engines, by engine family, more fully described in the documentation required by 40 CFR Part 1048, 40 CFR Part 60 and produced in the stated model year.

This certificate of conformity covers only those new nonroad spark-ignition engines which conform in all material respects to the design specifications that applied to those engines described in the documentation required by 40 CFR Part 1048, 40 CFR Part 60 and which are produced during the model year stated on this certificate of the said manufacturer, as defined in 40 CFR Part 1048, 40 CFR Part 60. This certificate of conformity does not cover nonroad engines imported prior to the effective date of the certificate.

It is a term of this certificate that the manufacturer shall consent to all inspections described in 40 CFR 1068.20 and authorized in a warrant or court order. Failure to comply with the requirements of such a warrant or court order may lead to revocation or suspension of this certificate for reasons specified in 40 CFR Part 1048, 40 CFR Part 60. It is also a term of this certificate that this certificate may be revoked or suspended or rendered void *ab initio* for other reasons specified in 40 CFR Part 1048, 40 CFR Part 60.

This certificate does not cover large nonroad engines sold, offered for sale, or introduced, or delivered for introduction, into commerce in the U.S. prior to the effective date of the certificate.

Table 3.2-3. UNCONTROLLED EMISSION FACTORS FOR 4-STROKE RICH-BURN
 ENGINES^a
 (SCC 2-02-002-53)

Pollutant	Emission Factor (lb/MMBtu) ^b (fuel input)	Emission Factor Rating
Criteria Pollutants and Greenhouse Gases		
NO _x ^c 90 - 105% Load	2.21 E+00	A
NO _x ^c <90% Load	2.27 E+00	C
CO ^c 90 - 105% Load	3.72 E+00	A
CO ^c <90% Load	3.51 E+00	C
CO ₂ ^d	1.10 E+02	A
SO ₂ ^e	5.88 E-04	A
TOC ^f	3.58 E-01	C
Methane ^g	2.30 E-01	C
VOC ^h	2.96 E-02	C
PM10 (filterable) ^{i,j}	9.50 E-03	E
PM2.5 (filterable) ^j	9.50 E-03	E
PM Condensable ^k	9.91 E-03	E
Trace Organic Compounds		
1,1,2,2-Tetrachloroethane ^l	2.53 E-05	C
1,1,2-Trichloroethane ^l	<1.53 E-05	E
1,1-Dichloroethane	<1.13 E-05	E
1,2-Dichloroethane	<1.13 E-05	E
1,2-Dichloropropane	<1.30 E-05	E
1,3-Butadiene ^l	6.63 E-04	D
1,3-Dichloropropene ^l	<1.27 E-05	E
Acetaldehyde ^{l,m}	2.79 E-03	C
Acrolein ^{l,m}	2.63 E-03	C
Benzene ^l	1.58 E-03	B
Butyr/isobutyraldehyde	4.86 E-05	D
Carbon Tetrachloride ^l	<1.77 E-05	E

Table 3.2-3. UNCONTROLLED EMISSION FACTORS FOR 4-STROKE RICH-BURN ENGINES
(Concluded)

Pollutant	Emission Factor (lb/MMBtu) ^b (fuel input)	Emission Factor Rating
Chlorobenzene ¹	<1.29 E-05	E
Chloroform ¹	<1.37 E-05	E
Ethane ⁿ	7.04 E-02	C
Ethylbenzene ¹	<2.48 E-05	E
Ethylene Dibromide ¹	<2.13 E-05	E
Formaldehyde ^{1,m}	2.05 E-02	A
Methanol ¹	3.06 E-03	D
Methylene Chloride ¹	4.12 E-05	C
Naphthalene ¹	<9.71 E-05	E
PAH ¹	1.41 E-04	D
Styrene ¹	<1.19 E-05	E
Toluene ¹	5.58 E-04	A
Vinyl Chloride ¹	<7.18 E-06	E
Xylene ¹	1.95 E-04	A

^a Reference 7. Factors represent uncontrolled levels. For NO_x, CO, and PM-10, “uncontrolled” means no combustion or add-on controls; however, the factor may include turbocharged units. For all other pollutants, “uncontrolled” means no oxidation control; the data set may include units with control techniques used for NO_x control, such as PCC and SCR for lean burn engines, and PSC for rich burn engines. Factors are based on large population of engines. Factors are for engines at all loads, except as indicated. SCC = Source Classification Code. TOC = Total Organic Compounds. PM10 = Particulate Matter ≤ 10 microns (μm) aerodynamic diameter. A “<” sign in front of a factor means that the corresponding emission factor is based on one-half of the method detection limit.

^b Emission factors were calculated in units of (lb/MMBtu) based on procedures in EPA Method 19. To convert from (lb/MMBtu) to (lb/10⁶ scf), multiply by the heat content of the fuel. If the heat content is not available, use 1020 Btu/scf. To convert from (lb/MMBtu) to (lb/hp-hr) use the following equation:

$$\text{lb/hp-hr} = (\text{lb/MMBtu}) (\text{heat input, MMBtu/hr}) (1/\text{operating HP, 1/hp})$$

^c Emission tests with unreported load conditions were not included in the data set.

^d Based on 99.5% conversion of the fuel carbon to CO₂. CO₂ [lb/MMBtu] = (3.67)(%CON)(C)(D)(1/h), where %CON = percent conversion of fuel carbon to CO₂,

C = carbon content of fuel by weight (0.75), D = density of fuel, 4.1 E+04 lb/10⁶ scf, and h = heating value of natural gas (assume 1020 Btu/scf at 60°F).

^e Based on 100% conversion of fuel sulfur to SO₂. Assumes sulfur content in natural gas of 2,000 gr/10⁶ scf.

^f Emission factor for TOC is based on measured emission levels from 6 source tests.

^g Emission factor for methane is determined by subtracting the VOC and ethane emission factors from the TOC emission factor.

^h VOC emission factor is based on the sum of the emission factors for all speciated organic compounds. Methane and ethane emissions were not measured for this engine category.

ⁱ No data were available for uncontrolled engines. PM10 emissions are for engines equipped with a PCC.

^j Considered $\leq 1 \mu\text{m}$ in aerodynamic diameter. Therefore, for filterable PM emissions, PM10(filterable) = PM2.5(filterable).

^k No data were available for condensable emissions. The presented emission factor reflects emissions from 4SLB engines.

^l Hazardous Air Pollutant as defined by Section 112(b) of the Clean Air Act.

^m For rich-burn engines, no interference is suspected in quantifying aldehyde emissions. The presented emission factors are based on FTIR and CARB 430 emissions data measurements.

ⁿ Ethane emission factor is determined by subtracting the VOC emission factor from the NMHC emission factor.

Table 1.4-1. EMISSION FACTORS FOR NITROGEN OXIDES (NO_x) AND CARBON MONOXIDE (CO)
FROM NATURAL GAS COMBUSTION^a

Combustor Type (MMBtu/hr Heat Input) [SCC]	NO _x ^b		CO	
	Emission Factor (lb/10 ⁶ scf)	Emission Factor Rating	Emission Factor (lb/10 ⁶ scf)	Emission Factor Rating
Large Wall-Fired Boilers (>100) [1-01-006-01, 1-02-006-01, 1-03-006-01]				
Uncontrolled (Pre-NSPS) ^c	280	A	84	B
Uncontrolled (Post-NSPS) ^c	190	A	84	B
Controlled - Low NO _x burners	140	A	84	B
Controlled - Flue gas recirculation	100	D	84	B
Small Boilers (<100) [1-01-006-02, 1-02-006-02, 1-03-006-02, 1-03-006-03]				
Uncontrolled	100	B	84	B
Controlled - Low NO _x burners	50	D	84	B
Controlled - Low NO _x burners/Flue gas recirculation	32	C	84	B
Tangential-Fired Boilers (All Sizes) [1-01-006-04]				
Uncontrolled	170	A	24	C
Controlled - Flue gas recirculation	76	D	98	D
Residential Furnaces (<0.3) [No SCC]				
Uncontrolled	94	B	40	B

^a Reference 11. Units are in pounds of pollutant per million standard cubic feet of natural gas fired. To convert from lb/10⁶ scf to kg/10⁶ m³, multiply by 16. Emission factors are based on an average natural gas higher heating value of 1,020 Btu/scf. To convert from lb/10⁶ scf to lb/MMBtu, divide by 1,020. The emission factors in this table may be converted to other natural gas heating values by multiplying the given emission factor by the ratio of the specified heating value to this average heating value. SCC = Source Classification Code. ND = no data. NA = not applicable.

^b Expressed as NO₂. For large and small wall fired boilers with SNCR control, apply a 24 percent reduction to the appropriate NO_x emission factor. For tangential-fired boilers with SNCR control, apply a 13 percent reduction to the appropriate NO_x emission factor.

^c NSPS=New Source Performance Standard as defined in 40 CFR 60 Subparts D and Db. Post-NSPS units are boilers with greater than 250 MMBtu/hr of heat input that commenced construction modification, or reconstruction after August 17, 1971, and units with heat input capacities between 100 and 250 MMBtu/hr that commenced construction modification, or reconstruction after June 19, 1984.

TABLE 1.4-3. EMISSION FACTORS FOR SPECIATED ORGANIC COMPOUNDS FROM NATURAL GAS COMBUSTION^a

CAS No.	Pollutant	Emission Factor (lb/10 ⁶ scf)	Emission Factor Rating
91-57-6	2-Methylnaphthalene ^{b,c}	2.4E-05	D
56-49-5	3-Methylchloranthrene ^{b,c}	<1.8E-06	E
	7,12-Dimethylbenz(a)anthracene ^{b,c}	<1.6E-05	E
83-32-9	Acenaphthene ^{b,c}	<1.8E-06	E
203-96-8	Acenaphthylene ^{b,c}	<1.8E-06	E
120-12-7	Anthracene ^{b,c}	<2.4E-06	E
56-55-3	Benz(a)anthracene ^{b,c}	<1.8E-06	E
71-43-2	Benzene ^b	2.1E-03	B
50-32-8	Benzo(a)pyrene ^{b,c}	<1.2E-06	E
205-99-2	Benzo(b)fluoranthene ^{b,c}	<1.8E-06	E
191-24-2	Benzo(g,h,i)perylene ^{b,c}	<1.2E-06	E
205-82-3	Benzo(k)fluoranthene ^{b,c}	<1.8E-06	E
106-97-8	Butane	2.1E+00	E
218-01-9	Chrysene ^{b,c}	<1.8E-06	E
53-70-3	Dibenzo(a,h)anthracene ^{b,c}	<1.2E-06	E
25321-22-6	Dichlorobenzene ^b	1.2E-03	E
74-84-0	Ethane	3.1E+00	E
206-44-0	Fluoranthene ^{b,c}	3.0E-06	E
86-73-7	Fluorene ^{b,c}	2.8E-06	E
50-00-0	Formaldehyde ^b	7.5E-02	B
110-54-3	Hexane ^b	1.8E+00	E
193-39-5	Indeno(1,2,3-cd)pyrene ^{b,c}	<1.8E-06	E
91-20-3	Naphthalene ^b	6.1E-04	E
109-66-0	Pentane	2.6E+00	E
85-01-8	Phenanathrene ^{b,c}	1.7E-05	D

TABLE 1.4-3. EMISSION FACTORS FOR SPECIATED ORGANIC COMPOUNDS FROM NATURAL GAS COMBUSTION (Continued)

CAS No.	Pollutant	Emission Factor (lb/10 ⁶ scf)	Emission Factor Rating
74-98-6	Propane	1.6E+00	E
129-00-0	Pyrene ^{b, c}	5.0E-06	E
108-88-3	Toluene ^b	3.4E-03	C

^a Reference 11. Units are in pounds of pollutant per million standard cubic feet of natural gas fired. Data are for all natural gas combustion sources. To convert from lb/10⁶ scf to kg/10⁶ m³, multiply by 16. To convert from lb/10⁶ scf to lb/MMBtu, divide by 1,020. Emission Factors preceded with a less-than symbol are based on method detection limits.

^b Hazardous Air Pollutant (HAP) as defined by Section 112(b) of the Clean Air Act.

^c HAP because it is Polycyclic Organic Matter (POM). POM is a HAP as defined by Section 112(b) of the Clean Air Act.

^d The sum of individual organic compounds may exceed the VOC and TOC emission factors due to differences in test methods and the availability of test data for each pollutant.

loading operation, resulting in high levels of vapor generation and loss. If the turbulence is great enough, liquid droplets will be entrained in the vented vapors.

A second method of loading is submerged loading. Two types are the submerged fill pipe method and the bottom loading method. In the submerged fill pipe method, the fill pipe extends almost to the bottom of the cargo tank. In the bottom loading method, a permanent fill pipe is attached to the cargo tank bottom. During most of submerged loading by both methods, the fill pipe opening is below the liquid surface level. Liquid turbulence is controlled significantly during submerged loading, resulting in much lower vapor generation than encountered during splash loading.

The recent loading history of a cargo carrier is just as important a factor in loading losses as the method of loading. If the carrier has carried a nonvolatile liquid such as fuel oil, or has just been cleaned, it will contain vapor-free air. If it has just carried gasoline and has not been vented, the air in the carrier tank will contain volatile organic vapors, which will be expelled during the loading operation along with newly generated vapors.

Cargo carriers are sometimes designated to transport only one product, and in such cases are practicing "dedicated service". Dedicated gasoline cargo tanks return to a loading terminal containing air fully or partially saturated with vapor from the previous load. Cargo tanks may also be "switch loaded" with various products, so that a nonvolatile product being loaded may expel the vapors remaining from a previous load of a volatile product such as gasoline. These circumstances vary with the type of cargo tank and with the ownership of the carrier, the petroleum liquids being transported, geographic location, and season of the year.

One control measure for vapors displaced during liquid loading is called "vapor balance service", in which the cargo tank retrieves the vapors displaced during product unloading at bulk plants or service stations and transports the vapors back to the loading terminal. Figure 5.2-5 shows a tank truck in vapor balance service filling a service station underground tank and taking on displaced gasoline vapors for return to the terminal. A cargo tank returning to a bulk terminal in vapor balance service normally is saturated with organic vapors, and the presence of these vapors at the start of submerged loading of the tanker truck results in greater loading losses than encountered during nonvapor balance, or "normal", service. Vapor balance service is usually not practiced with marine vessels, although some vessels practice emission control by means of vapor transfer within their own cargo tanks during ballasting operations, discussed below.

Emissions from loading petroleum liquid can be estimated (with a probable error of ± 30 percent)⁴ using the following expression:

$$L_L = 12.46 \frac{SPM}{T} \quad (1)$$

where:

L_L = loading loss, pounds per 1000 gallons (lb/10³ gal) of liquid loaded

S = a saturation factor (see Table 5.2-1)

P = true vapor pressure of liquid loaded, pounds per square inch absolute (psia)
(see Figure 7.1-5, Figure 7.1-6, and Table 7.1-2)

M = molecular weight of vapors, pounds per pound-mole (lb/lb-mole) (see Table 7.1-2)

T = temperature of bulk liquid loaded, °R (°F + 460)

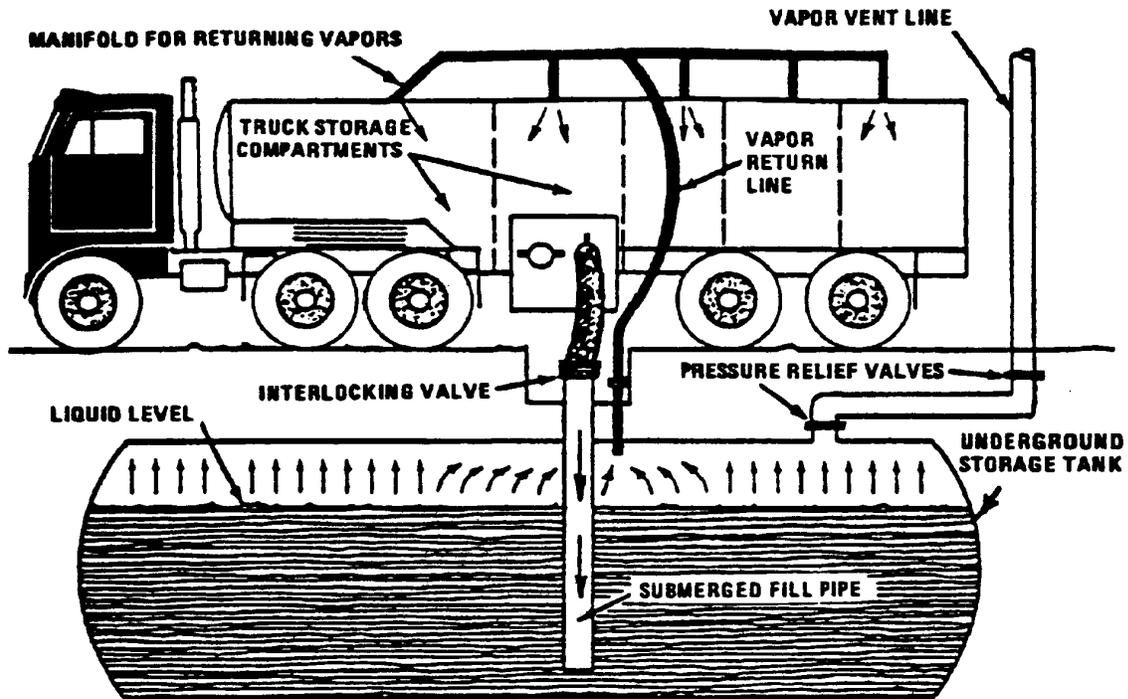


Figure 5.2-5. Tank truck unloading into a service station underground storage tank and practicing "vapor balance" form of emission control.

Table 5.2-1. SATURATION (S) FACTORS FOR CALCULATING PETROLEUM LIQUID LOADING LOSSES

Cargo Carrier	Mode Of Operation	S Factor
Tank trucks and rail tank cars	Submerged loading of a clean cargo tank	0.50
	Submerged loading: dedicated normal service	0.60
	Submerged loading: dedicated vapor balance service	1.00
	Splash loading of a clean cargo tank	1.45
	Splash loading: dedicated normal service	1.45
	Splash loading: dedicated vapor balance service	1.00
Marine vessels ^a	Submerged loading: ships	0.2
	Submerged loading: barges	0.5

^a For products other than gasoline and crude oil. For marine loading of gasoline, use factors from Table 5.2-2. For marine loading of crude oil, use Equations 2 and 3 and Table 5.2-3.

Since flares do not lend themselves to conventional emission testing techniques, only a few attempts have been made to characterize flare emissions. Recent EPA tests using propylene as flare gas indicated that efficiencies of 98 percent can be achieved when burning an offgas with at least 11,200 kJ/m³ (300 Btu/ft³). The tests conducted on steam-assisted flares at velocities as low as 39.6 meters per minute (m/min) (130 ft/min) to 1140 m/min (3750 ft/min), and on air-assisted flares at velocities of 180 m/min (617 ft/min) to 3960 m/min (13,087 ft/min) indicated that variations in incoming gas flow rates have no effect on the combustion efficiency. Flare gases with less than 16,770 kJ/m³ (450 Btu/ft³) do not smoke.

Table 13.5-1 presents flare emission factors, and Table 13.5-2 presents emission composition data obtained from the EPA tests.¹ Crude propylene was used as flare gas during the tests. Methane was a major fraction of hydrocarbons in the flare emissions, and acetylene was the dominant intermediate hydrocarbon species. Many other reports on flares indicate that acetylene is always formed as a stable intermediate product. The acetylene formed in the combustion reactions may react further with hydrocarbon radicals to form polyacetylenes followed by polycyclic hydrocarbons.²

In flaring waste gases containing no nitrogen compounds, NO is formed either by the fixation of atmospheric nitrogen (N) with oxygen (O) or by the reaction between the hydrocarbon radicals present in the combustion products and atmospheric nitrogen, by way of the intermediate stages, HCN, CN, and OCN.² Sulfur compounds contained in a flare gas stream are converted to SO₂ when burned. The amount of SO₂ emitted depends directly on the quantity of sulfur in the flared gases.

Table 13.5-1 (English Units). EMISSION FACTORS FOR FLARE OPERATIONS^a

EMISSION FACTOR RATING: B

Component	Emission Factor (lb/10 ⁶ Btu)
Total hydrocarbons ^b	0.14
Carbon monoxide	0.37
Nitrogen oxides	0.068
Soot ^c	0 - 274

^a Reference 1. Based on tests using crude propylene containing 80% propylene and 20% propane.

^b Measured as methane equivalent.

^c Soot in concentration values: nonsmoking flares, 0 micrograms per liter (µg/L); lightly smoking flares, 40 µg/L; average smoking flares, 177 µg/L; and heavily smoking flares, 274 µg/L.

TABLE 2-4. OIL AND GAS PRODUCTION OPERATIONS AVERAGE EMISSION FACTORS (kg/hr/source)

Equipment Type	Service ^a	Emission Factor (kg/hr/source) ^b
Valves	Gas	4.5E-03
	Heavy Oil	8.4E-06
	Light Oil	2.5E-03
	Water/Oil	9.8E-05
Pump seals	Gas	2.4E-03
	Heavy Oil	NA
	Light Oil	1.3E-02
	Water/Oil	2.4E-05
Others ^c	Gas	8.8E-03
	Heavy Oil	3.2E-05
	Light Oil	7.5E-03
	Water/Oil	1.4E-02
Connectors	Gas	2.0E-04
	Heavy Oil	7.5E-06
	Light Oil	2.1E-04
	Water/Oil	1.1E-04
Flanges	Gas	3.9E-04
	Heavy Oil	3.9E-07
	Light Oil	1.1E-04
	Water/Oil	2.9E-06
Open-ended lines	Gas	2.0E-03
	Heavy Oil	1.4E-04
	Light Oil	1.4E-03
	Water/Oil	2.5E-04

^aWater/Oil emission factors apply to water streams in oil service with a water content greater than 50%, from the point of origin to the point where the water content reaches 99%. For water streams with a water content greater than 99%, the emission rate is considered negligible.

^bThese factors are for total organic compound emission rates (including non-VOC's such as methane and ethane) and apply to light crude, heavy crude, gas plant, gas production, and off shore facilities. "NA" indicates that not enough data were available to develop the indicated emission factor.

^cThe "other" equipment type was derived from compressors, diaphragms, drains, dump arms, hatches, instruments, meters, pressure relief valves, polished rods, relief valves, and vents. This "other" equipment type should be applied for any equipment type other than connectors, flanges, open-ended lines, pumps, or valves.

ATTACHMENT O: TANKER TRUCK LOADING DATA SHEET

ATTACHMENT O – TANKER TRUCK LOADING DATA SHEET

Complete this data sheet for each new or modified bulk liquid transfer area or loading rack at the facility. This is to be used for bulk liquid transfer operations to tanker trucks. Use extra pages if necessary.

Truck Loadout Collection Efficiencies

The following applicable capture efficiencies of a truck loadout are allowed:

- For tanker trucks passing the MACT level annual leak test – 99.2%
- For tanker trucks passing the NSPS level annual leak test – 98.7%
- For tanker trucks not passing one of the annual leak tests listed above – 70%

Compliance with this requirement shall be demonstrated by keeping records of the applicable MACT or NSPS Annual Leak Test certification for *every* truck and railcar loaded/unloaded. This requirement can be satisfied if the trucking company provided certification that its entire fleet was compliant. This certification must be submitted in writing to the Director of the DAQ. These additional requirements must be noted in the Registration Application.

Emission Unit ID#: EU-LOAD-COND	Emission Point ID#: APC-COMB-TKLD	Year Installed/Modified: TBD		
Emission Unit Description: Condensate Truck Loading Emissions				
Loading Area Data				
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks loading at one (1) time: 1		
Are tanker trucks pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:				
Provide description of closed vent system and any bypasses. Vapors are collected and routed to a vapor combustor.				
Are any of the following truck loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck passing a NSPS level annual leak test? <input type="checkbox"/> Closed System to tanker truck not passing an annual leak test and has vapor return?				
Projected Maximum Operating Schedule (for rack or transfer point as a whole)				
Time	Jan – Mar	Apr - Jun	Jul – Sept	Oct - Dec
Hours/day	24	24	24	24
Days/week	5	5	5	5
Bulk Liquid Data (use extra pages as necessary)				
Liquid Name	Condensate			
Max. Daily Throughput (1000 gal/day)	105			
Max. Annual Throughput (1000 gal/yr)	38,325			
Loading Method ¹	SUB			
Max. Fill Rate (gal/min)	125			
Average Fill Time (min/loading)	Approx 60			
Max. Bulk Liquid Temperature (°F)	50.33			
True Vapor Pressure ²	9.1546			
Cargo Vessel Condition ³	U			
Control Equipment or Method ⁴	O = Vapor Return s/ Combustion Controls			

Max. Collection Efficiency (%)	70%		
Max. Control Efficiency (%)	98%		
Max.VOC Emission Rate	Loading (lb/hr)	16.74	
	Annual (ton/yr)	42.77	
Max.HAP Emission Rate	Loading (lb/hr)	1.36	
	Annual (ton/yr)	3.46	
Estimation Method ⁵	EPA		

Emission Unit ID#: EU-LOAD-PW	Emission Point ID#: APC-COMB-TKLD	Year Installed/Modified: TBD	
Emission Unit Description: Produced Water Truck Loading Emissions			
Loading Area Data			
Number of Pumps: 1	Number of Liquids Loaded: 1	Max number of trucks loading at one (1) time: 1	
Are tanker trucks pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> Not Required If Yes, Please describe:			
Provide description of closed vent system and any bypasses. Vapors are collected and routed to a vapor combustor.			
Are any of the following truck loadout systems utilized? <input type="checkbox"/> Closed System to tanker truck passing a MACT level annual leak test? <input type="checkbox"/> Closed System to tanker truck passing a NSPS level annual leak test? <input type="checkbox"/> Closed System to tanker truck not passing an annual leak test and has vapor return?			
Projected Maximum Operating Schedule (for rack or transfer point as a whole)			
Time	Jan – Mar	Apr - Jun	Jul – Sept
Hours/day	24	24	24
Days/week	5	5	5
Bulk Liquid Data (use extra pages as necessary)			
Liquid Name	Produced Water		
Max. Daily Throughput (1000 gal/day)	42		
Max. Annual Throughput (1000 gal/yr)	15,330		
Loading Method ¹	SUB		
Max. Fill Rate (gal/min)	125		
Average Fill Time (min/loading)	Approx 60		
Max. Bulk Liquid Temperature (°F)	50.33		
True Vapor Pressure ²	0.2436		
Cargo Vessel Condition ³	U		
Control Equipment or Method ⁴	O = Vapor Return s/ Combustion Controls		
Max. Collection Efficiency (%)	70%		
Max. Control Efficiency (%)	98%		
Max.VOC Emission Rate	Loading (lb/hr)	0.16	
	Annual (ton/yr)	0.16	
	Loading (lb/hr)	0.01	

Max.HAP Emission Rate	Annual (ton/yr)	0.01		
Estimation Method ⁵		EPA		

- | | | | | | | |
|---|-----|---|----|-------------|---|-------------------------------|
| 1 | BF | Bottom Fill | SP | Splash Fill | SUB | Submerged Fill |
| 2 | | At maximum bulk liquid temperature | | | | |
| 3 | B | Ballasted Vessel | C | Cleaned | U | Uncleaned (dedicated service) |
| | O | Other (describe) | | | | |
| 4 | | List as many as apply (complete and submit appropriate Air Pollution Control Device Sheets) | | | | |
| | CA | Carbon Adsorption | | VB | Dedicated Vapor Balance (closed system) | |
| | ECD | Enclosed Combustion Device | | F | Flare | |
| | TO | Thermal Oxidization or Incineration | | | | |
| 5 | EPA | EPA Emission Factor in AP-42 | | | MB | Material Balance |
| | TM | Test Measurement based upon test data submittal | | | O | Other (describe) |

ATTACHMENT Q: PNEUMATIC CONTROLLERS DATA SHEET

**ATTACHMENT Q – PNEUMATIC CONTROLLERS
DATA SHEET**

Are there any continuous bleed natural gas driven pneumatic controllers at this facility that commenced construction, modification or reconstruction after August 23, 2011?

Yes No

Please list approximate number.

Are there any continuous bleed natural gas driven pneumatic controllers at this facility with a bleed rate greater than 6 standard cubic feet per hour that are required based on functional needs, including but not limited to response time, safety and positive actuation that commenced construction, modification or reconstruction after August 23, 2011?

Yes No

Please list approximate number.

**ATTACHMENT R: AIR POLLUTION CONTROL DEVICE/EMISSION REDUCTION
DEVICES SHEETS**

VAPOR COMBUSTION
VAPOR RECOVERY UNIT

**ATTACHMENT R – AIR POLLUTION CONTROL DEVICE /
EMISSION REDUCTION DEVICE SHEETS**

Complete the applicable air pollution control device sheets for each flare, vapor combustor, thermal oxidizer, condenser, adsorption system, vapor recovery unit, BTEX Eliminator, Reboiler with and without Glow Plug, etc. at the facility. Use extra pages if necessary.

Emissions calculations must be performed using the most conservative control device efficiency.

The following five (5) rows are only to be completed if registering an alternative air pollution control device.

Emission Unit ID:	Make/Model:
Primary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No
Secondary Control Device ID:	Make/Model:
Control Efficiency (%):	APCD/ERD Data Sheet Completed: <input type="checkbox"/> Yes <input type="checkbox"/> No

VAPOR COMBUSTION (Including Enclosed Combustors)

General Information

Control Device ID#: APC-COMB-TKLD	Installation Date: TBD <input checked="" type="checkbox"/> New <input type="checkbox"/> Modified <input type="checkbox"/> Relocated	
Maximum Rated Total Flow Capacity 11,188 scfh 268,500 scfd	Maximum Design Heat Input (from mfg. spec sheet) 30.0 MMBTU/hr	Design Heat Content 2,682 BTU/scf

Control Device Information

Type of Vapor Combustion Control?		
<input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Thermal Oxidizer	<input type="checkbox"/> Elevated Flare	<input type="checkbox"/> Ground Flare
Manufacturer: MRW Technologies Model: TBF-6.5-34-268500	Hours of operation per year? 8,760	

List the emission units whose emissions are controlled by this vapor control device (Emission Point ID# APC-COMB-TKLD)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
EU-TANKS-COND	Condensate Tanks	EU-LOAD-PW	Produced Water Truck Loading
EU-TANKS-PW	Produced Water Tanks		
EU-LOAD-COND	Condensate Truck Loading		

If this vapor combustor controls emissions from more than six (6) emission units, please attach additional pages.

Assist Type (Flares only)	Flare Height	Tip Diameter	Was the design per §60.18?
<input type="checkbox"/> Steam <input type="checkbox"/> Air <input type="checkbox"/> Pressure <input type="checkbox"/> Non	feet	feet	<input type="checkbox"/> Yes <input type="checkbox"/> No Provide determination.

Waste Gas Information

Maximum Waste Gas Flow Rate 187 (scfm)	Heat Value of Waste Gas Stream 2,682 BTU/ft ³	Exit Velocity of the Emissions Stream (ft/s)
--	--	--

Provide an attachment with the characteristics of the waste gas stream to be burned.

Pilot Gas Information

Number of Pilot Lights 3	Fuel Flow Rate to Pilot Flame per Pilot 50 scfh	Heat Input per Pilot 45,250 BTU/hr	Will automatic re-ignition be used? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
-----------------------------	--	---------------------------------------	--

If automatic re-ignition is used, please describe the method. **If the pilot flame is lost, the control system will automatically attempt to relight the pilot. If the re-ignition attempt fails, the pilot solenoid valve will automatically close and a local and remote alarm signal will be generated to indicate loss of pilot flame.**

Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	If Yes, what type? <input type="checkbox"/> Thermocouple <input type="checkbox"/> Infrared <input type="checkbox"/> Ultraviolet <input type="checkbox"/> Camera <input checked="" type="checkbox"/> Other: flame rod
---	---

Describe all operating ranges and maintenance procedures required by the manufacturer to maintain the warranty. *(If unavailable, please indicate).*

Additional information attached? Yes No
 Please attach copies of manufacturer's data sheets, drawings, flame demonstration per §60.18 or §63.11(b) and performance testing.

VAPOR RECOVERY UNIT

General Information

Emission Unit ID#: APC-VRU-TANKS

Installation Date: TBD

New Modified Relocated

Device Information

Manufacturer: TBD

Model: TBD

List the emission units whose emissions are controlled by this vapor recovery unit (Emission Point ID# APC-VRU-TANKS)

Emission Unit ID#	Emission Source Description	Emission Unit ID#	Emission Source Description
EU-TANKS-COND	Condensate Tanks		
EU-TANKS-PW	Produced Water Tanks		

If this vapor recovery unit controls emissions from more than six (6) emission units, please attach additional pages.

Additional information attached? Yes No

Please attach copies of manufacturer's data sheets, drawings, and performance testing.

The registrant may claim a capture and control efficiency of 95 % (which accounts for 5% downtime) for the vapor recovery unit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup flare that meet the requirements of Section 8.1.2 of this general permit.

The registrant may claim a capture and control efficiency of 98% if the VRU has a backup VRU.



Tank Battery Combustor Specification Sheet
MRW Technologies, Inc.
Combustor Model Number: TBF-6.5-34-268500

Expected Destruction Removal Efficiency (DRE):	98% or Greater of Non-Methane Hydrocarbons
Unit Size:	6.5-foot Diameter 34-Foot Overall Height
Design Heat Input:	30 MMBTU/HR
Design Flow Rates:	268,500 SCFD
Design Heat Content:	2682 BTU/SCF
Waste Gas Flame Arrestor:	Enardo
Pilot Type:	MRW Electric Ignition
Pilot Operation (Continuous/Intermittent):	Three (3) Continuous
Pilot Fuel Consumption:	150 SCFH or Less Total (50 SCFH per Pilot)
Pilot Monitoring Device:	Flame Rod
Automatic Re-Ignition:	Included
Remote Alarm Indication:	Included

Description of Control Scheme:

The Combustor pilots are monitored via flame rod. If one of the pilot flames are lost, the control system will automatically attempt to relight the pilot. If the re-ignition attempt fails, the pilot solenoid valve will automatically close and a local & remote alarm signal will be generated to indicate loss of pilot flame.

C O M B U S T I O N S Y S T E M S

ATTACHMENT S: EMISSIONS CALCULATIONS

SWN Production Company, LLC
Linda Greathouse Pad
Summary of Criteria Air Pollutant Emissions

Equipment	Unit ID	Emission Point ID	NOx		CO		Total VOC ¹		SO ₂		PM Total	
			lb/hr	TPY	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	EP-ENG1	0.32	1.40	0.64	2.80	0.24	1.05	<0.01	<0.01	0.02	0.09
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG2	EP-ENG2	0.32	1.40	0.64	2.80	0.24	1.05	0.01	0.04	0.02	0.09
215-hp Caterpillar G3406 NA Engine	EU-ENG3	EP-ENG3	0.47	2.06	0.95	4.16	0.36	1.58	<0.01	<0.01	0.03	0.14
77-kw Zenith ZPP-644 4.4L 6 Cylinder Engine	EU-ENG4	EP-ENG4	0.46	2.01	0.75	3.29	0.47	2.06	<0.01	<0.01	0.01	0.04
Four (4) 1.0-mmBtu/hr GPU Burners	EU-GPU1 - EU-GPU4	EP-GPU1 - EP-GPU4	0.44	1.92	0.36	1.56	0.02	0.12	<0.01	0.01	0.03	0.15
Two (2) 0.5-mmBtu/hr Heater Treaters	EU-HT1 - EU-HT2	EP-HT1 - EP-HT2	0.12	0.52	0.10	0.44	0.01	0.02	<0.01	<0.01	0.01	0.04
Two (2) 1.5-mmBtu/hr Stabilizer Heaters	EU-SH1 - EU-SH2	EP-SH1 - EP-SH2	0.34	1.48	0.28	1.22	0.02	0.08	<0.01	0.01	0.03	0.11
Eight (8) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS-COND	APC-COMB-TKLD	-	-	-	-	-	-	-	-	-	-
Four (4) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	APC-COMB-TKLD	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-COND	APC-COMB-TKLD	-	-	-	-	9.76	42.77	-	-	-	-
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	APC-COMB-TKLD	-	-	-	-	0.04	0.16	-	-	-	-
One (1) 30.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB-TKLD	APC-COMB-TKLD	4.14	18.13	8.27	36.22	5.87	25.71	-	-	0.09	0.39
Vapor Combustor Pilots	EU-PILOT	APC-COMB-TKLD	0.02	0.09	0.01	0.06	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Fugitive Emissions	EU-FUG	EP-FUG	-	-	-	-	1.11	4.85	-	-	-	-
Fugitive Haul Road Emissions	EU-HR	EP-HR	-	-	-	-	-	-	-	-	5.74	18.84
Total =			6.63	29.02	12.00	52.55	18.14	79.46	0.02	0.08	5.98	19.90

Notes:

¹ Total VOC includes all constituents heavier than Propane (C3+), including hazardous air pollutants (HAP). Speciated HAP presented in following table. Also note that Caterpillar engine manufacturer data for VOC does not include formaldehyde; therefore, total VOC emissions presented here are different than VOC emissions as defined and calculated in the engine calculations.

SWN Production Company, LLC
Linda Greathouse Pad
Summary of Hazardous Air Pollutants

Equipment	Unit ID	Estimated Emissions (lb/hr)									
		Acetaldehyde	Acrolein	Benzene	Ethylbenzene	Formaldehyde	Methanol	n-Hexane	Toluene	Xylenes	Total HAP
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	-	<0.01	<0.01	0.03
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG2	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	-	<0.01	<0.01	0.03
215-hp Caterpillar G3406 NA Engine	EU-ENG3	<0.01	<0.01	<0.01	<0.01	0.03	0.01	-	<0.01	<0.01	0.05
77-kw Zenith ZPP-644 4.4L 6 Cylinder Engine	EU-ENG4	<0.01	-	-	-	-	-	-	<0.01	<0.01	<0.01
Four (4) 1.0-mmBtu/hr GPU Burners	EU-GPU1 - EU-GPU4	-	-	<0.01	-	<0.01	-	0.01	<0.01	-	0.01
Two (2) 0.5-mmBtu/hr Heater Treaters	EU-HT1 - EU-HT2	-	-	<0.01	-	<0.01	-	<0.01	<0.01	-	<0.01
Two (2) 1.5-mmBtu/hr Stabilizer Heaters	EU-SH1 - EU-SH2	-	-	<0.01	-	<0.01	-	0.01	<0.01	-	0.01
Eight (8) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS-COND	-	-	-	-	-	-	-	-	-	-
Four (4) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-COND	-	-	0.01	0.04	-	-	0.56	0.04	0.14	0.79
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	-	-	<0.01	<0.01	-	-	<0.01	<0.01	<0.01	<0.01
One (1) 30.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB-TKLD	-	-	<0.01	0.02	-	-	0.34	0.02	0.08	0.47
Vapor Combustor Pilots	EU-PILOT	-	-	<0.01	-	<0.01	-	<0.01	<0.01	-	<0.01
Fugitive Emissions	EU-FUG	-	-	<0.01	<0.01	-	-	0.05	<0.01	0.01	0.06
Fugitive Haul Road Emissions	EU-HR	-	-	-	-	-	-	-	-	-	-
Total =		0.01	0.01	0.02	0.07	0.07	0.01	0.97	0.07	0.23	1.46

Continued on Next Page

SWN Production Company, LLC
Linda Greathouse Pad
Summary of Hazardous Air Pollutants (Continued)

Equipment	Unit ID	Estimated Emissions (TPY)									
		Acetaldehyde	Acrolein	Benzene	Ethylbenzene	Formaldehyde	Methanol	n-Hexane	Toluene	Xylenes	Total HAP
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	0.02	0.01	0.01	<0.01	0.09	0.02	-	<0.01	<0.01	0.15
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG2	0.02	0.01	0.01	<0.01	0.09	0.02	-	<0.01	<0.01	0.15
215-hp Caterpillar G3406 NA Engine	EU-ENG3	0.02	0.02	0.01	<0.01	0.13	0.02	-	<0.01	<0.01	0.21
77-kw Zenith ZPP-644 4.4L 6 Cylinder Engine	EU-ENG4	0.01	0.01	<0.01	<0.01	0.06	0.01	-	<0.01	<0.01	0.09
Four (4) 1.0-mmBtu/hr GPU Burners	EU-GPU1 - EU-GPU4	-	-	<0.01	-	<0.01	-	0.03	<0.01	-	0.04
Two (2) 0.5-mmBtu/hr Heater Treaters	EU-HT1 - EU-HT2	-	-	<0.01	-	<0.01	-	0.01	<0.01	-	0.01
Two (2) 1.5-mmBtu/hr Stabilizer Heaters	EU-SH1 - EU-SH2	-	-	<0.01	-	<0.01	-	0.03	<0.01	-	0.03
Eight (8) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS-COND	-	-	-	-	-	-	-	-	-	-
Four (4) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-COND	-	-	0.03	0.18	-	-	2.47	0.17	0.61	3.46
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	-	-	<0.01	<0.01	-	-	0.01	<0.01	<0.01	0.01
One (1) 30.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB-TKLD	-	-	0.02	0.11	-	-	1.49	0.10	0.35	2.07
Vapor Combustor Pilots	EU-PILOT	-	-	<0.01	-	<0.01	-	<0.01	<0.01	-	<0.01
Fugitive Emissions	EU-FUG	-	-	<0.01	0.01	-	-	0.21	0.01	0.04	0.27
Fugitive Haul Road Emissions	EU-HR	-	-	-	-	-	-	-	-	-	-
Total =		0.06	0.06	0.08	0.30	0.38	0.06	4.25	0.29	1.01	6.49

SWN Production Company, LLC
Linda Greathouse Pad
Summary of Greenhouse Gas Emissions - Metric Tons per Year (Tonnes)

Equipment	Unit ID	Carbon Dioxide (CO ₂)		Methane (CH ₄)		Methane (CH ₄) as CO ₂ Eq.		Nitrous Oxide (N ₂ O)		Nitrous Oxide (N ₂ O) as CO ₂ Eq.		Total CO ₂ + CO ₂ Eq. ¹	
		lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	155.04	616.04	<0.01	0.01	0.07	0.27	<0.01	<0.01	0.08	0.33	155.19	616.64
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG2	155.04	616.04	<0.01	0.01	0.07	0.27	<0.01	<0.01	0.08	0.33	155.19	616.64
215-hp Caterpillar G3406 NA Engine	EU-ENG3	252.63	1,003.83	<0.01	0.01	0.09	0.37	<0.01	<0.01	0.11	0.44	252.84	1,004.64
77-kw Zenith ZPP-644 4.4L 6 Cylinder Engine	EU-ENG4	74.89	297.56	<0.01	0.01	0.04	0.14	<0.01	<0.01	0.04	0.17	74.96	297.87
Four (4) 1.0-mmBtu/hr GPU Burners	EU-GPU1 - EU-GPU4	467.91	1,859.22	0.01	0.04	0.22	0.88	<0.01	<0.01	0.26	1.04	468.39	1,861.14
Two (2) 0.5-mmBtu/hr Heater Treaters	EU-HT1 - EU-HT2	116.98	464.80	<0.01	0.01	0.06	0.22	<0.01	<0.01	0.07	0.26	117.10	465.28
Two (2) 1.5-mmBtu/hr Stabilizer Heaters	EU-SH1 - EU-SH2	350.93	1,394.41	0.01	0.03	0.17	0.66	<0.01	<0.01	0.20	0.78	351.29	1,395.85
Eight (8) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS-COND	-	-	-	-	-	-	-	-	-	-	-	-
Four (4) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	-	-	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-COND	<0.01	<0.01	0.03	0.10	0.64	2.55	-	-	-	-	0.64	2.55
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	0.01	0.04	0.71	2.84	17.85	70.92	-	-	-	-	17.86	70.96
One (1) 30.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB-TKLD	3,509.31	13,944.14	0.07	0.26	1.65	6.57	0.01	0.03	1.97	7.83	3,512.94	13,958.54
Vapor Combustor Pilots	EU-PILOT	15.88	63.10	<0.01	<0.01	0.01	0.03	<0.01	<0.01	0.01	0.04	15.90	63.17
Fugitive Emissions	EU-FUG	0.01	0.03	1.05	4.16	26.25	104.10	-	-	-	-	26.26	104.13
Fugitive Haul Road Emissions	EU-HR	-	-	-	-	-	-	-	-	-	-	-	-
Total =		5,098.62	20,259.21	1.88	7.48	47.11	186.98	0.01	0.04	2.82	11.21	5,148.56	20,457.41

Notes:

¹ CO₂ Equivalent = Pollutant times GWP multiplier. 40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier (100-Year Time Horizon): CO₂ = 1, CH₄ = 25, N₂O = 298

² Per API Compendium (2009) Chapter 5: Because most of the CH₄ and CO₂ emissions from storage tanks occur as a result of flashing (which is controlled by the vapor combustor in this case), working and breathing loss emissions of these gases are very small in production and virtually non-existent in the downstream segments. Vapors from the tanks are routed to the vapor combustor at this site. Therefore, GHG emissions from the condensate and produced water tanks are assumed to be negligible.

SWN Production Company, LLC
Linda Greathouse Pad
Summary of Greenhouse Gas Emissions - Short Tons per Year (Tons)

Equipment	Unit ID	Carbon Dioxide (CO ₂)		Methane (CH ₄)		Methane (CH ₄) as CO ₂ Eq.		Nitrous Oxide (N ₂ O)		Nitrous Oxide (N ₂ O) as CO ₂ Eq.		Total CO ₂ + CO ₂ Eq. ¹	
		lb/hr	tons/yr ²	lb/hr	tons/yr ²	lb/hr	tons/yr	lb/hr	tons/yr ²	lb/hr	tons/yr	lb/hr	tons/yr
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG1	155.04	679.06	<0.01	0.01	0.07	0.30	<0.01	<0.01	0.08	0.36	155.19	679.73
145-hp Caterpillar G3306 NA Engine w/ Catalytic Converter	EU-ENG2	155.04	679.06	<0.01	0.01	0.07	0.30	<0.01	<0.01	0.08	0.36	155.19	679.73
215-hp Caterpillar G3406 NA Engine	EU-ENG3	252.63	1,106.54	<0.01	0.02	0.09	0.40	<0.01	<0.01	0.11	0.48	252.84	1,107.42
77-kw Zenith ZPP-644 4.4L 6 Cylinder Engine	EU-ENG4	74.89	328.00	<0.01	0.01	0.04	0.15	<0.01	<0.01	0.04	0.18	74.96	328.34
Four (4) 1.0-mmBtu/hr GPU Burners	EU-GPU1 - EU-GPU4	467.91	2,049.44	0.01	0.04	0.22	0.97	<0.01	<0.01	0.26	1.15	468.39	2,051.55
Two (2) 0.5-mmBtu/hr Heater Treaters	EU-HT1 - EU-HT2	116.98	512.36	<0.01	0.01	0.06	0.24	<0.01	<0.01	0.07	0.29	117.10	512.89
Two (2) 1.5-mmBtu/hr Stabilizer Heaters	EU-SH1 - EU-SH2	350.93	1,537.08	0.01	0.03	0.17	0.72	<0.01	<0.01	0.20	0.86	351.29	1,538.67
Eight (8) 400-bbl Condensate Tanks Routed to Vapor Combustor	EU-TANKS-COND	-	-	-	-	-	-	-	-	-	-	-	-
Four (4) 400-bbl Produced Water Tanks Routed to Vapor Combustor	EU-TANKS-PW	-	-	-	-	-	-	-	-	-	-	-	-
Condensate Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-COND	<0.01	<0.01	0.03	0.11	0.64	2.81	-	-	-	-	0.64	2.81
Produced Water Truck Loading w/ Vapor Return Routed to Combustor	EU-LOAD-PW	0.01	0.04	0.71	3.13	17.85	78.18	-	-	-	-	17.86	78.22
One (1) 30.0-mmBtu/hr Vapor Combustor - Tank/Loading Stream	APC-COMB-TKLD	3,509.31	15,370.78	0.07	0.29	1.65	7.24	0.01	0.03	1.97	8.63	3,512.94	15,386.66
Vapor Combustor Pilots	EU-PILOT	15.88	69.56	<0.01	<0.01	0.01	0.03	<0.01	<0.01	0.01	0.04	15.90	69.63
Fugitive Emissions	EU-FUG	0.01	0.03	1.05	4.59	26.25	114.75	-	-	-	-	26.26	114.78
Fugitive Haul Road Emissions	EU-HR	-	-	-	-	-	-	-	-	-	-	-	-
Total =		5,098.62	22,331.96	1.88	8.25	47.11	206.11	0.01	0.04	2.82	12.36	5,148.56	22,550.43

Notes:
¹ CO₂ Equivalent = Pollutant times GWP multiplier. 40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier (100-Year Time Horizon): CO₂ = 1, CH₄ = 25, N₂O = 298
² EPA and API GHG calculation methodologies calculate emissions in metric tons (tonnes). These values have been converted to short tons for consistency with permitting threshold units.
³ Per API Compendium (2009) Chapter 5: Because most of the CH₄ and CO₂ emissions from storage tanks occur as a result of flashing (which is controlled by the vapor combustor in this case), working and breathing loss emissions of these gases are very small in production and virtually non-existent in the downstream segments. Vapors from the tanks are routed to the vapor combustor at this site. Therefore, GHG emissions from the condensate and produced water tanks are assumed to be negligible.

**SWN Production Company, LLC
Linda Greathouse Pad
Engine Emissions Calculations - Criteria Air Pollutants**

Equipment Information

	<u>EU-ENG1</u>	<u>EU-ENG2</u>	<u>EU-ENG3</u>
Unit ID:	EP-ENG1	EP-ENG2	EP-ENG3
Emission Point ID:	EP-ENG1	EP-ENG2	EP-ENG3
Make:	Caterpillar	Caterpillar	Caterpillar
Model:	G3306 NA	G3306 NA	G3406 NA
Design Class:	4S-RB	4S-RB	4S-RB
Controls:	NSCR	NSCR	NSCR
Horsepower (hp):	145	145	215
Fuel Use (Btu/hp-hr):	8,625	8,625	7,767
Fuel Use (scfh):	1,382	1,382	1,845
Annual Fuel Use (mmscf):	12.11	12.11	16.16
Fuel Use (mmBtu/hr):	1.25	1.25	1.67
Exhaust Flow (acfm):	678	678	1,018
Exhaust Temp (°F):	1,101	1,101	1,135
Operating Hours:	8,760	8,760	8,760
Fuel Heating Value (Btu/scf):	905	905	905

Uncontrolled Manufacturer Emission Factors¹

NOx (g/hp-hr):	13.47	13.47	16.52
CO (g/hp-hr):	13.47	13.47	16.52
NMNEHC/VOC (g/hp-hr):	0.22	0.22	0.21
Total VOC = NMNEHC + HCHO (g/hp-hr):	0.22	0.22	0.48

Post-Catalyst Emission Factors

NOx Control Eff. %	92.58%	92.58%	93.95%
CO Control Eff. %	85.15%	85.15%	87.89%
NOx (g/hp-hr):	1.00	1.00	1.00
CO (g/hp-hr):	2.00	2.00	2.00
NMNEHC/VOC (g/hp-hr):	0.70	0.70	0.70
Total VOC = NMNEHC + HCHO (g/hp-hr):	0.76	0.76	0.76

Uncontrolled Criteria Air Pollutant Emissions

Pollutant	Unit ID: <u>EU-ENG1</u>		<u>EU-ENG2</u>		<u>EU-ENG3</u>	
	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY
NOx	4.31	18.88	4.31	18.88	7.83	34.30
CO	4.31	18.88	4.31	18.88	7.83	34.30
NMNEHC/VOC (does not include HCHO)	0.07	0.31	0.07	0.31	0.10	0.44
Total VOC (includes HCHO)	0.07	0.31	0.07	0.31	0.23	1.00
SO ₂	<0.01	<0.01	0.01	0.04	<0.01	<0.01
PM _{10/2.5}	0.01	0.04	0.01	0.04	0.02	0.07
PM _{COND}	0.01	0.04	0.01	0.04	0.02	0.07
PM _{TOT}	0.02	0.09	0.02	0.09	0.03	0.14

SWN Production Company, LLC
 Linda Greathouse Pad
 Engine Emissions Calculations - Criteria Air Pollutants (Continued)

Proposed Criteria Air Pollutant Emissions²

Unit ID:	<u>EU-ENG1</u>		<u>EU-ENG2</u>		<u>EU-ENG3</u>	
Pollutant	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY
NOx	0.32	1.40	0.32	1.40	0.47	2.06
CO	0.64	2.80	0.64	2.80	0.95	4.16
NMNEHC/VOC (does not include HCHO)	0.22	0.96	0.22	0.96	0.33	1.45
Total VOC (includes HCHO)	0.24	1.05	0.24	1.05	0.36	1.58
SO ₂	<0.01	<0.01	<0.01	0.04	<0.01	<0.01
PM _{10/2.5}	0.01	0.04	0.01	0.04	0.02	0.07
PM _{COND}	0.01	0.04	0.01	0.04	0.02	0.07
PM _{TOT}	0.02	0.09	0.02	0.09	0.03	0.14

AP-42 Emission Factors (lb/mmBtu)³

4S-RB

Pollutant	3.2-3 (7/00)
SO ₂	5.88E-04
PM _{10/2.5}	9.50E-03
PM _{COND}	9.91E-03
PM _{TOT}	1.94E-02

Notes:

¹ Uncontrolled emission factors based on engine manufacturer data. Per Caterpillar, NMNEHC emission factor does not include formaldehyde (HCHO); therefore, NMNEHC and HCHO factors have been added to demonstrate total uncontrolled VOC.

² Post-catalyst emission factors based on catalyst manufacturer data and/or NSPS Subpart JJJJ limits, if applicable. Per NSPS Subpart JJJJ, VOC limit does not include HCHO; therefore, HCHO emissions have been added to the NSPS JJJJ VOC emission rates for demonstration purposes only.

³ Per AP-42, all particulate matter (PM) from combustion of natural gas (total, condensable and filterable PM) is presumed <1 micrometer in diameter.

**SWN Production Company, LLC
Linda Greathouse Pad
Engine Emissions Calculations - Hazardous Air Pollutants**

Equipment Information

	<u>EU-ENG1</u>	<u>EU-ENG2</u>	<u>EU-ENG3</u>
Unit ID:	EP-ENG1	EP-ENG2	EP-ENG3
Emission Point ID:	Caterpillar	Caterpillar	Caterpillar
Make:	G3306 NA	G3306 NA	G3406 NA
Model:	4S-RB	4S-RB	4S-RB
Design Class:	NSCR	NSCR	NSCR
Controls:	145	145	215
Horsepower (hp):	8,625	8,625	7,767
Fuel Use (Btu/hp-hr):	1,382	1,382	1,845
Fuel Use (scfh):	12.11	12.11	16.16
Annual Fuel Use (mmscf):	1.25	1.25	1.67
Fuel Use (mmBtu/hr):	678	678	1,018
Exhaust Flow (acfm):	1,101	1,101	1,135
Exhaust Temp (°F):	8,760	8,760	8,760
Operating Hours:			

Manufacturer Formaldehyde Factor

Pre-Control (g/hp-hr):	0.27	0.27	0.27
Control Efficiency ¹ :	76.00%	76.00%	76.00%
Permit Factor (g/hp-hr):	0.06	0.06	0.06

Uncontrolled HAP Emissions

	<u>EU-ENG1</u>		<u>EU-ENG2</u>		<u>EU-ENG3</u>	
Unit ID:						
Pollutant	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY
Acetaldehyde	<0.01	0.02	<0.01	0.02	<0.01	0.02
Acrolein	<0.01	0.01	<0.01	0.01	<0.01	0.02
Benzene	<0.01	0.01	<0.01	0.01	<0.01	0.01
Ethylbenzene	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Formaldehyde	0.09	0.38	0.09	0.38	0.13	0.56
Methanol	<0.01	0.02	<0.01	0.02	0.01	0.02
Toluene	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Xylenes	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Total HAPs =	0.10	0.44	0.10	0.44	0.15	0.64

**SWN Production Company, LLC
Linda Greathouse Pad
Engine Emissions Calculations - Hazardous Air Pollutants**

Proposed HAP Emissions

Unit ID: **EU-ENG1** **EU-ENG2** **EU-ENG3**

Pollutant	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY
Acetaldehyde	<0.01	0.02	<0.01	0.02	<0.01	0.02
Acrolein	<0.01	0.01	<0.01	0.01	<0.01	0.02
Benzene	<0.01	0.01	<0.01	0.01	<0.01	0.01
Ethylbenzene	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Formaldehyde	0.02	0.09	0.02	0.09	0.03	0.13
Methanol	<0.01	0.02	<0.01	0.02	0.01	0.02
Toluene	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Xylenes	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Total HAPs =	0.03	0.15	0.03	0.15	0.05	0.21

AP-42 Emission Factors (lb/mmBtu)

4S-RB

Pollutant	3.2-3 (7/00)
Acetaldehyde	2.79E-03
Acrolein	2.63E-03
Benzene	1.58E-03
Ethylbenzene	2.18E-05
Methanol	3.06E-03
Toluene	5.58E-04
Xylenes	1.95E-04

Notes:

¹ For conservative estimate, no reduction taken for any HAP other than formaldehyde.

**SWN Production Company, LLC
Linda Greathouse Pad
Engine Emissions Calculations - Greenhouse Gases**

Equipment Information

Unit ID:	<u>EU-ENG1</u>	<u>EU-ENG2</u>	<u>EU-ENG3</u>
Emission Point ID:	EP-ENG1	EP-ENG2	EP-ENG3
Make:	Caterpillar	Caterpillar	Caterpillar
Model:	G3306 NA	G3306 NA	G3406 NA
Design Class:	4S-RB	4S-RB	4S-RB
Controls:	NSCR	NSCR	NSCR
Horsepower (hp):	145	145	215
Fuel Use (Btu/hp-hr):	8,625	8,625	7,767
Fuel Use (scfh):	1,382	1,382	1,845
Fuel Use (mmBtu/hr):	1.25	1.25	1.67
Exhaust Flow (acfm):	678	678	1,018
Exhaust Temp (°F):	1,101	1,101	1,135
Operating Hours:	8,760	8,760	8,760

Manufacturer data used to calculate CO₂ emissions (g/hp-hr):			
	485	485	533

Greenhouse Gas (GHG) Emissions¹

Pollutant	Unit ID: <u>EU-ENG1</u>		<u>EU-ENG2</u>		<u>EU-ENG3</u>	
	lb/hr	tonnes/yr	lb/hr	tonnes/yr	lb/hr	tonnes/yr
CO ₂	155.04	616.04	155.04	616.04	252.63	1,003.83
CH ₄	<0.01	0.01	<0.01	0.01	<0.01	0.01
N ₂ O	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
CH ₄ as CO ₂ e	0.07	0.27	0.07	0.27	0.09	0.37
N ₂ O as CO ₂ e	0.08	0.33	0.08	0.33	0.11	0.44
Total CO₂ + CO₂e =	155.19	616.64	155.19	616.64	252.84	1,004.64

40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)²

Methane (CH ₄)	1.00E-03
Nitrous Oxide (N ₂ O)	1.00E-04

Notes:

¹ Conversion to short tons (tons) found in site-wide Summary of Greenhouse Gases - Short Tons per Year (tons) table.

² CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25, N₂O = 298

**SWN Production Company, LLC
Linda Greathouse Pad
Proposed Engine Emissions Calculations - Criteria Air Pollutants**

Equipment Information

Unit ID:	<u>EU-ENG4</u>
Emission Point ID:	EP-ENG4
Make:	Zenith
Model:	ZPP-644 4.4L
Design Class:	4S-RB
Controls:	NSCR
Capacity (kW):	77.0
Capacity (hp):	103.3
Fuel Use (Btu/kW-hr):	8,314
Fuel Use (scfh):	707
Annual Fuel Use (mmscf):	6.20
Fuel Use (mmBtu/hr):	0.64
Operating Hours:	8,760
Fuel Heating Value (Btu/scf):	905

Emission Factors^{1,2}

NMHC+NOx as NOx (g/kW-hr):	2.70
CO (g/kW-hr):	4.40
NMHC+NOx as VOC (g/kW-hr):	2.70

Proposed Criteria Air Pollutant Emissions

Unit ID: **EU-ENG4**

Pollutant	lb/hr	TPY
NMHC+NOx as NOx	0.46	2.01
CO	0.75	3.29
NMHC+NOx as VOC	0.46	2.01
SO ₂	<0.01	<0.01
PM _{10/2.5}	0.01	0.04
PM _{COND}	0.01	0.04
PM _{TOT}	0.01	0.04

AP-42 Emission Factors (lb/mmBtu)³

4S-RB

Pollutant	3.2-3 (7/00)
SO ₂	5.88E-04
PM _{10/2.5}	9.50E-03
PM _{COND}	9.91E-03
PM _{TOT}	1.94E-02

Notes:

¹ EU-ENG4 is certified to meet EPA emissions standards of 2.7 g/kW-hr NMHC+NOx and 4.4 g/kW-hr CO. Total NMHC+NOx factor used to conservatively estimate emissions of NOx and VOC, respectively. All other pollutants calculated using AP-42.

² EU-ENG4 emissions factors are from NSPS Subpart JJJJ emission limits for Stage 2 engines, converted to g/kw-hr.

³ Per AP-42, all particulate matter (PM) from combustion of natural gas (total, condensable and filterable PM) is presumed <1 micrometer in diameter.

SWN Production Company, LLC
Linda Greathouse Pad
Proposed Engine Emissions Calculations - Hazardous Air Pollutants

Equipment Information

Unit ID: **EU-ENG4**
Emission Point ID: EP-ENG4
Make: Zenith
Model: ZPP-644 4.4L
Design Class: 4S-RB
Capacity (kW): 77.0
Fuel Use (Btu/kW-hr): 8,314
Fuel Use (scfh): 707
Annual Fuel Use (mmscf): 6.20
Fuel Use (mmBtu/hr): 0.64
Operating Hours: 8,760
Fuel Heating Value (Btu/scf): 905

Proposed HAP Emissions

Unit ID: **EU-ENG4**

Pollutant	lb/hr	TPY
Acetaldehyde	<0.01	0.01
Acrolein	<0.01	0.01
Benzene	<0.01	<0.01
Ethylbenzene	<0.01	<0.01
Formaldehyde	0.01	0.06
Methanol	<0.01	0.01
Toluene	<0.01	<0.01
Xylenes	<0.01	<0.01
Total HAP =	0.02	0.09

AP-42 Emission Factors (lb/mmBtu)

Pollutant	3.2-3 (7/00)
Acetaldehyde	2.79E-03
Acrolein	2.63E-03
Benzene	1.58E-03
Ethylbenzene	2.18E-05
Formaldehyde	2.05E-02
Methanol	3.06E-03
Toluene	5.58E-04
Xylenes	1.95E-04

**SWN Production Company, LLC
Linda Greathouse Pad
Proposed Engine Emissions Calculations - Greenhouse Gases**

Equipment Information

Unit ID: **EU-ENG4**
 Emission Point ID: EP-ENG4
 Make: Zenith
 Model: ZPP-644 4.4L
 Design Class: 4S-RB
 Controls: NSCR
 Capacity (kW): 77.0
 Fuel Use (Btu/kW-hr): 8,314
 Fuel Use (scfh): 707
 Annual Fuel Use (mmscf): 6.20
 Fuel Use (mmBtu/hr): 0.64
 Operating Hours: 8,760
 Fuel Heating Value (Btu/scf): 905

Greenhouse Gas (GHG) Emissions

Unit ID: **EU-ENG4**

Pollutant	lb/hr	tonnes/yr
CO ₂	74.89	297.56
CH ₄	<0.01	0.01
N ₂ O	<0.01	<0.01
CH ₄ as CO ₂ e	0.04	0.14
N ₂ O as CO ₂ e	0.04	0.17
Total CO₂ + CO₂e =	74.96	297.87

40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)¹

Carbon Dioxide (CO ₂)	53.06
Methane (CH ₄)	1.00E-03
Nitrous Oxide (N ₂ O)	1.00E-04

Notes:

¹ CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25, N₂O = 298

**SWN Production Company, LLC
Linda Greathouse Pad
Gas Production Unit Burner Emissions Calculations - Criteria Air Pollutants**

Equipment Information

Unit ID:	<u>EU-GPU1 - EU-GPU4 (EACH)</u>
Emission Point ID:	EP-GPU1 - EP-GPU4
Description:	Gas Production Unit Burner
Number of Units:	4
Burner Design (mmBtu/hr):	1.0
Fuel HHV (Btu/scf):	905
Annual Fuel Use (mmscf):	9.68
Annual Operating Hours:	8,760

Criteria Air Pollutant Emissions

Unit ID: **EU-GPU1 - EU-GPU4 (EACH)** **EU-GPU1 - EU-GPU5 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
NOx	0.11	0.48	0.44	1.92
CO	0.09	0.39	0.36	1.56
VOC	0.01	0.03	0.02	0.12
SO ₂	<0.01	<0.01	<0.01	<0.01
PM _{10/2.5}	0.01	0.03	0.03	0.11
PM _{COND}	<0.01	0.01	<0.01	<0.04
PM _{TOT}	0.01	0.04	0.03	0.15

AP-42 Emission Factors for Units <100 mmBtu/hr (lb/mmscf)¹

Pollutant	1.4-1, -2 (7/98)
NOx	100.0
CO	84.0
VOC	5.5
SO ₂	0.6
PM _{10/2.5}	5.7
PM _{COND}	1.9
PM _{TOT}	7.6

Notes:

¹ All PM (total, condensable and filterable) is assumed to be <1 micrometer in diameter. Total PM is the sum of filterable PM and condensable PM.

**SWN Production Company, LLC
 Linda Greathouse Pad
 Gas Production Unit Burner Emissions Calculations - Hazardous Air Pollutants**

Equipment Information

Unit ID: **EU-GPU1 - EU-GPU4 (EACH)**
 Emission Point ID: EP-GPU1 - EP-GPU4
 Description: Gas Production Unit Burner
 Number of Units: 4
 Burner Design (mmBtu/hr): 1.0
 Fuel HHV (Btu/scf): 905
 Annual Fuel Use (mmscf): 9.68
 Annual Operating Hours: 8,760

Hazardous Air Pollutant Emissions

Unit ID: **EU-GPU1 - EU-GPU4 (EACH)** **EU-GPU1 - EU-GPU5 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
n-Hexane	<0.01	0.01	<0.01	<0.03
Formaldehyde	<0.01	<0.01	<0.01	<0.01
Benzene	<0.01	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01	<0.01
Total HAPs =	<0.01	0.01	0.01	0.04

AP-42 Emission Factors (lb/mmscf)

Pollutant	1.4-3 (7/98)
n-Hexane	1.80E+00
Formaldehyde	7.50E-02
Benzene	2.10E-03
Toluene	3.40E-03

**SWN Production Company, LLC
Linda Greathouse Pad
Gas Production Unit Burner Emissions Calculations - Greenhouse Gases**

Equipment Information

Unit ID: **EU-GPU1 - EU-GPU4 (EACH)**
 Emission Point ID: EP-GPU1 - EP-GPU4
 Description: Gas Production Unit Burner
 Number of Units: 4
 Burner Design (mmBtu/hr): 1.0
 Fuel HHV (Btu/scf): 905
 Annual Fuel Use (mmscf): 9.68
 Annual Operating Hours: 8,760

Greenhouse Gas (GHG) Emissions¹

Unit ID: **EU-GPU1 - EU-GPU4 (EACH)** **EU-GPU1 - EU-GPU5 (TOTAL)**

Pollutant	lb/hr	tonnes/yr	lb/hr	tonnes/yr
CO ₂	116.98	464.80	467.91	1,859.22
CH ₄	<0.01	0.01	<0.01	<0.04
N ₂ O	<0.01	<0.01	<0.01	<0.01
CH ₄ as CO ₂ e	0.06	0.22	0.22	0.88
N ₂ O as CO ₂ e	0.07	0.26	0.26	1.04
Total CO₂ + CO₂e =	117.10	465.28	468.39	1,861.14

40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)²

Carbon Dioxide (CO ₂)	53.06
Methane (CH ₄)	1.00E-03
Nitrous Oxide (N ₂ O)	1.00E-04

Notes:

¹ Conversion to short tons (tons) found in site-wide Summary of Greenhouse Gases - Short Tons per Year (tons) table.

² CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25, N₂O = 298

**SWN Production Company, LLC
Linda Greathouse Pad
Heater Treater Emissions Calculations - Criteria Air Pollutants**

Equipment Information

Unit ID: **EU-HT1 - EU-HT2 (EACH)**
 Emission Point ID: EP-HT1 - EP-HT2
 Description: Heater Treater
 Number of Units: 2
 Burner Design (mmBtu/hr): 0.5
 Fuel HHV (Btu/scf): 905
 Annual Fuel Use (mmscf): 4.84
 Annual Operating Hours: 8,760

Criteria Air Pollutant Emissions

Unit ID: **EU-HT1 - EU-HT2 (EACH)** **EU-HT1 and EU-HT2 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
NOX	0.06	0.26	0.12	0.52
CO	0.05	0.22	0.10	0.44
VOC	<0.01	0.01	0.01	0.02
SO ₂	<0.01	<0.01	<0.01	<0.01
PM _{10/2.5}	<0.01	0.01	0.01	0.03
PM _{COND}	<0.01	<0.01	<0.01	0.01
PM _{TOT}	<0.01	0.02	0.01	0.04

AP-42 Emission Factors for Units <100 mmBtu/hr (lb/mmscf)¹

Pollutant	1.4-1, -2 (7/98)
NOX	100.0
CO	84.0
VOC	5.5
SO ₂	0.6
PM _{10/2.5}	5.7
PM _{COND}	1.9
PM _{TOT}	7.6

Notes:

¹ All PM (total, condensable and filterable) is assumed to be <1 micrometer in diameter. Total PM is the sum of filterable PM and condensable PM.

**SWN Production Company, LLC
 Linda Greathouse Pad
 Heater Treater Emissions Calculations - Hazardous Air Pollutants**

Equipment Information

Unit ID: **EU-HT1 - EU-HT2 (EACH)**
 Emission Point ID: EP-HT1 - EP-HT2
 Description: Heater Treater
 Number of Units: 2
 Burner Design (mmBtu/hr): 0.5
 Fuel HHV (Btu/scf): 905
 Annual Fuel Use (mmscf): 4.84
 Annual Operating Hours: 8,760

Hazardous Air Pollutant Emissions

Unit ID: **EU-HT1 - EU-HT2 (EACH)** **EU-HT1 and EU-HT2 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
n-Hexane	<0.01	<0.01	<0.01	0.01
Formaldehyde	<0.01	<0.01	<0.01	<0.01
Benzene	<0.01	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01	<0.01
Total HAPs =	<0.01	<0.01	<0.01	0.01

AP-42 Emission Factors (lb/mmscf)

Pollutant	1.4-3 (7/98)
n-Hexane	1.80E+00
Formaldehyde	7.50E-02
Benzene	2.10E-03
Toluene	3.40E-03

**SWN Production Company, LLC
Linda Greathouse Pad
Heater Treater Emissions Calculations - Greenhouse Gases**

Equipment Information

Unit ID:	<u>EU-HT1 - EU-HT2 (EACH)</u>
Emission Point ID:	EP-HT1 - EP-HT2
Description:	Heater Treater
Number of Units:	2
Burner Design (mmBtu/hr):	0.5
Fuel HHV (Btu/scf):	905
Annual Fuel Use (mmscf):	4.84
Annual Operating Hours:	8,760

Greenhouse Gas (GHG) Emissions¹

Unit ID: **EU-HT1 - EU-HT2 (EACH)** **EU-HT1 and EU-HT2 (TOTAL)**

Pollutant	lb/hr	tonnes/yr	lb/hr	tonnes/yr
CO ₂	58.49	232.40	116.98	464.80
CH ₄	<0.01	<0.01	<0.01	<0.01
N ₂ O	<0.01	<0.01	<0.01	<0.01
CH ₄ as CO ₂ e	0.03	0.11	0.06	0.22
N ₂ O as CO ₂ e	0.03	0.13	0.07	0.26
Total CO₂ + CO₂e =	58.55	232.64	117.10	465.28

40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)²

Carbon Dioxide (CO ₂)	53.06
Methane (CH ₄)	1.00E-03
Nitrous Oxide (N ₂ O)	1.00E-04

Notes:

¹ Conversion to short tons (tons) found in site-wide Summary of Greenhouse Gases - Short Tons per Year (tons) table.

² CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25, N₂O = 298

**SWN Production Company, LLC
Linda Greathouse Pad
Stabilizer Heater Emissions Calculations - Criteria Air Pollutants**

Equipment Information

Unit ID: **EU-SH1 - EU-SH2**
 Emission Point ID: EP-SH1 - EP-SH2
 Description: Stabilizer Heater
 Number of Units: 2
 Burner Design (mmBtu/hr): 1.5
 Fuel HHV (Btu/scf): 905
 Annual Fuel Use (mmscf): 14.52
 Annual Operating Hours: 8,760

Criteria Air Pollutant Emissions

Unit ID: **EU-SH1 - EU-SH2** **EU-SH1 and EU-SH2 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
NOx	0.17	0.74	0.34	1.48
CO	0.14	0.61	0.28	1.22
VOC	0.01	0.04	0.02	0.08
SO ₂	<0.01	<0.01	<0.01	0.01
PM _{10/2.5}	0.01	0.04	0.02	0.08
PM _{COND}	<0.01	0.01	0.01	0.03
PM _{TOT}	0.01	0.06	0.03	0.11

AP-42 Emission Factors for Units <100 mmBtu/hr (lb/mmscf)¹

Pollutant	1.4-1, -2 (7/98)
NOx	100.0
CO	84.0
VOC	5.5
SO ₂	0.6
PM _{10/2.5}	5.7
PM _{COND}	1.9
PM _{TOT}	7.6

Notes:

¹All PM (total, condensable and filterable) is assumed to be <1 micrometer in diameter. Total PM is the sum of filterable PM and condensable PM.

**SWN Production Company, LLC
Linda Greathouse Pad
Line Heater Emissions Calculations - Hazardous Air Pollutants**

Equipment Information

Unit ID: **EU-SH1 - EU-SH2**
 Emission Point ID: EP-SH1 - EP-SH2
 Description: Stabilizer Heater
 Number of Units: 2
 Burner Design (mmBtu/hr): 1.5
 Fuel HHV (Btu/scf): 905
 Annual Fuel Use (mmscf): 14.52
 Annual Operating Hours: 8,760

Hazardous Air Pollutant Emissions

Unit ID: **EU-SH1 - EU-SH2** **EU-SH1 and EU-SH2 (TOTAL)**

Pollutant	lb/hr	TPY	lb/hr	TPY
n-Hexane	<0.01	0.01	0.01	0.03
Formaldehyde	<0.01	<0.01	<0.01	<0.01
Benzene	<0.01	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01	<0.01
Total HAPs =	<0.01	0.01	0.01	0.03

AP-42 Emission Factors (lb/mmscf)

Pollutant	1.4-3 (7/98)
n-Hexane	1.80E+00
Formaldehyde	7.50E-02
Benzene	2.10E-03
Toluene	3.40E-03

**SWN Production Company, LLC
Linda Greathouse Pad
Line Heater Emissions Calculations - Greenhouse Gases**

Equipment Information

Unit ID:	<u>EU-SH1 - EU-SH2</u>
Emission Point ID:	EP-SH1 - EP-SH2
Description:	Stabilizer Heater
Number of Units:	2
Burner Design (mmBtu/hr):	1.5
Fuel HHV (Btu/scf):	905
Annual Fuel Use (mmscf):	14.52
Annual Operating Hours:	8,760

Greenhouse Gas (GHG) Emissions¹

Unit ID: **EU-SH1 - EU-SH2** **EU-SH1 and EU-SH2 (TOTAL)**

Pollutant	lb/hr	tonnes/yr	lb/hr	tonnes/yr
CO ₂	175.47	697.21	350.93	1394.41
CH ₄	<0.01	0.01	0.01	0.03
N ₂ O	<0.01	<0.01	<0.01	<0.01
CH ₄ as CO ₂ e	0.08	0.33	0.17	0.66
N ₂ O as CO ₂ e	0.10	0.39	0.20	0.78
Total CO₂ + CO₂e =	175.65	697.93	351.29	1,395.85

40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)²

Carbon Dioxide (CO ₂)	53.06
Methane (CH ₄)	1.00E-03
Nitrous Oxide (N ₂ O)	1.00E-04

Notes:

¹ Conversion to short tons (tons) found in site-wide Summary of Greenhouse Gases - Short Tons per Year (tons) table.

² CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25, N₂O = 298

**SWN Production Company, LLC
Linda Greathouse Pad
Storage Tank Emissions - Criteria Air Pollutants**

Tank Information

	<u>EU-TANKS-COND</u>	<u>EU-TANKS-PW</u>
Unit ID:	APC-COMB-TKLD	APC-COMB-TKLD
Emission Point ID:	APC-COMB-TKLD	APC-COMB-TKLD
Contents: ¹	Condensate	Produced Water
Number of Tanks: ²	8	4
Capacity (bbl) - Per Tank:	400	400
Capacity (gal) - Per Tank:	16,800	16,800
Total Throughput (bbl/yr):	912,500	365,000
Total Throughput (gal/yr):	38,325,000	15,330,000
Total Throughput (bbl/d):	2,500	1,000
Tank Flashing Emission Factor (lb/bbl):	2.50	0.05
Total Working Losses (lb/yr): ³	57,626.70	229.82
Breathing Losses per Tank (lb/yr): ³	1,706.11	11.32
Tank Vapor Capture Efficiency:	100%	100%
Captured Vapors Routed to:	Vapor Combustor	Vapor Combustor

Uncontrolled Storage Tank Emissions

	<u>EU-TANKS-COND</u>		<u>EU-TANKS-PW</u>	
Emissions	lb/hr	TPY	lb/hr	TPY
Working Losses	6.58	28.81	0.03	0.11
Breathing Losses	1.55	6.80	0.01	0.04
Flashing Losses	260.42	1,140.63	2.08	9.13
Total VOC =	268.55	1,176.24	2.12	9.28

Notes:

¹ Produced water tanks assumed to contain 99% produced water and 1% condensate.

² SWN requests to combine working, breathing and flashing emissions from each tank type to be combined into one emissions point with a total throughput limit rather than an individual tank limit.

³ Tank working and breathing emissions were calculated using maximum throughput in EPA TANKS 4.0.9d for working losses and multiplying results for breathing losses by the number of tanks for total potential evaporative losses from all tanks. Flashing calculated using Promax process simulation. Reports located in Appendix A. Uncontrolled tank working/breathing/flashing emissions are routed to a vapor combustor with 100% capture efficiency.

Total Annual Emissions (TPY) = Tank Working + Breathing + Flashing Emissions (TPY) * (1 - Capture Efficiency (%))

**SWN Production Company, LLC
Linda Greathouse Pad
Storage Tank Emissions - Hazardous Air Pollutants**

Uncontrolled Storage Tank Emissions

Unit ID: **EU-TANKS-COND** **EU-TANKS-PW**

Pollutant	lb/hr	TPY	lb/hr	TPY
Total VOC = ¹	268.55	1,176.24	2.12	9.28
n-Hexane	15.53	68.02	0.12	0.54
Benzene	0.19	0.82	<0.01	0.01
Toluene	1.05	4.59	0.01	0.04
Ethylbenzene	1.13	4.95	0.01	0.04
Xylenes	3.85	16.84	0.03	0.13
Total HAP =	21.74	95.23	0.17	0.75

Estimated HAP Composition (% by Weight)³

Pollutant	Wt%
n-Hexane	5.783%
Benzene	0.070%
Toluene	0.390%
Ethylbenzene	0.421%
Xylenes	1.432%
Total HAP =	8.096%

Notes:

¹ VOC emissions calculated in Criteria Air Pollutant calculations.

² Uncontrolled tank working/breathing/flashing emissions are routed to a vapor combustor with 100% capture efficiency.

³ Speciated liquids analysis located in Fugitive Emissions Calculations. HAP weight % calculated as % of total hydrocarbons in the sample. All HAP assumed to volatilize from liquids for most conservative emissions estimate.

**SWN Production Company, LLC
Linda Greathouse Pad
Condensate Truck Loading Emissions - Criteria and Hazardous Air Pollutants**

Loading Information

Unit ID: **EU-LOAD-COND**
 Emission Point ID: APC-COMB-TKLD
 Fill Method: Submerged
 Type of Service: Dedicated
 Mode of Operation: Normal
 Saturation Factor: 0.6
 Em. Factor (lb/1000 gal): ¹ 7.44
 Throughput (1000 gal): 38,325
 Control Type: Vapor Return/Combustion
 Vapor Capture Efficiency: ² 70%
 Average Fill Rate (gal/hr): 7,500
 Captured Vapors Routed to: Vapor Combustor

9.1546	= P, True vapor pressure of liquid loaded (max. psia) ³
55.486	= M, Molecular weight of vapor (lb/lb-mol)
50.33	= T, Temperature of bulk liquid loaded (average °F)
510.33	= T, Temperature of bulk liquid loaded (°F + 460 = °R)

Uncontrolled Loading Emissions⁴

Pollutant	Max. lb/hr	Avg. lb/hr	TPY
VOC =	55.80	32.55	142.57
n-Hexane	3.23	1.88	8.24
Benzene	0.04	0.02	0.10
Toluene	0.22	0.13	0.56
Ethylbenzene	0.23	0.14	0.60
Xylenes	0.80	0.47	2.04
Total HAP⁵ =	4.52	2.64	11.54

**SWN Production Company, LLC
Linda Greathouse Pad
Condensate Truck Loading Emissions - Criteria and Hazardous Air Pollutants (Continued)**

Uncaptured Loading Emissions⁴

Pollutant	Max. lb/hr	Avg. lb/hr	TPY
VOC =	16.74	9.76	42.77
n-Hexane	0.97	0.56	2.47
Benzene	0.01	0.01	0.03
Toluene	0.07	0.04	0.17
Ethylbenzene	0.07	0.04	0.18
Xylenes	0.24	0.14	0.61
Total HAP⁵ =	1.36	0.79	3.46

Notes:

¹ AP-42 5.2-4 Eq.1: Loading Loss (lb/1000 gal) = 12.46 *S*P*M/T.

² Uncontrolled emissions that are captured by the collection system are routed to a vapor combustor. Per AP-42 5.2-6, 70% capture efficiency can be assumed for trucks not subject to NSPS. Uncaptured emissions shown represent those not captured by the collection system or controlled by the vapor combustor.

³ AP-42 Section 7.1 - Properties of Selected Petroleum Liquids correlation with RVP estimated based on stabilization process.

⁴ Maximum lb/hr based on average hourly truck loading rate. Average lb/hr based on TPY conversion assuming continuous operation.

⁵ Speciated liquids analysis located in Fugitive Emissions Calculations. HAP weight % calculated as % of total hydrocarbons in the sample. All HAP assumed to volatilize from liquids for most conservative emissions estimate.

Pollutant	Wt%
n-Hexane	5.783%
Benzene	0.070%
Toluene	0.390%
Ethylbenzene	0.421%
Xylenes	1.432%
Total HAPs =	8.096%

**SWN Production Company, LLC
Linda Greathouse Pad
Condensate Truck Loading Emissions - Greenhouse Gases**

Loading Information

Unit ID: **EU-LOAD-COND**
 Fill Method: APC-COMB-TKLD
 Fill Method: Submerged
 Type of Service: Dedicated
 Mode of Operation: Normal
 TOC Em. Factor (tonne/10⁶ gal): ¹ 0.91
 Throughput (10⁶ gal): 38.325
 Control Type: Vapor Return/Combustion
 Vapor Capture Efficiency: ² 70.00%
 Average Fill Rate (gal/hr): 7,500
 Captured Vapors Routed to: Vapor Combustor

Input CH ₄ from Promax =	0.9745%
Input CO ₂ from Promax =	0.0161%

Uncontrolled Loading Emissions^{3,4}

Pollutant	Max. lb/hr	Avg. lb/hr	tonnes/yr	tons/yr
CH ₄	0.15	0.09	0.34	0.37
CH ₄ as CO ₂ e	3.67	2.14	8.50	9.37
CO ₂	<0.01	<0.01	0.01	0.01
Total CO₂ + CO₂e =	3.67	2.14	8.50	9.37

**SWN Production Company, LLC
Linda Greathouse Pad
Condensate Truck Loading Emissions - Greenhouse Gases (Continued)**

Uncaptured Loading Emissions^{3, 4}

Pollutant	Max. lb/hr	Avg. lb/hr	tonnes/yr	tons/yr
CH ₄	0.04	0.03	0.10	0.11
CH ₄ as CO ₂ e	1.10	0.64	2.55	2.81
CO ₂	<0.01	<0.01	<0.01	<0.01
Total CO₂ + CO₂e =	1.10	0.64	2.55	2.81

API Compendium Table 5-12

Loading Type	Emission Factor (tonne TOC/10⁶ gal)
Rail/Truck - Submerged Loading - Dedicated Normal Service	0.91
Rail/Truck - Submerged Loading - Vapor Balance Service	1.51
Rail/Truck - Splash Loading - Dedicated Normal Service	2.20
Rail/Truck - Splash Loading - Vapor Balance Service	1.51
Marine Loading - Ships/Ocean Barges	0.28
Marine Loading - Barges	0.45

Notes:

¹ API Compendium of Greenhouse Gas Emissions Methodologies for the Oil and Gas Industry, Table 5-12.

² Uncontrolled emissions that are captured by the collection system are routed to a vapor combustor. Per AP-42 5.2-6, 70% capture efficiency can be assumed for trucks not subject to NSPS. Uncaptured emissions shown represent those not captured by the collection system or controlled by the vapor combustor.

³ Maximum lb/hr based on average hourly truck loading rate. Average lb/hr based on TPY conversion assuming continuous operation.

⁴ CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25

**SWN Production Company, LLC
Linda Greathouse Pad
Produced Water Truck Loading Emissions - Criteria and Hazardous Air Pollutants**

Loading Information

Unit ID: **EU-LOAD-PW**
 Emission Point ID: APC-COMB-TKLD
 Fill Method: Submerged
 Type of Service: Dedicated
 Mode of Operation: Normal
 Saturation Factor: 0.6
 Em. Factor (lb/1000 gal): ¹ 0.07
 Throughput (1000 gal): 15,330
 Control Type: Vapor Return/Combustion
 Vapor Capture Efficiency: ² 70%
 Average Fill Rate (gal/hr): 7,500
 Captured Vapors Routed to: Vapor Combustor

0.2436	= P, True vapor pressure of liquid loaded (max. psia)
20.6523	= M, Molecular weight of vapor (lb/lb-mol)
50.33	= T, Temperature of bulk liquid loaded (average °F)
510.33	= T, Temperature of bulk liquid loaded (°F + 460 = °R)

Uncontrolled Loading Emissions³

Pollutant	Max. lb/hr	Avg. lb/hr	TPY
VOC =	0.53	0.12	0.54
n-Hexane	0.03	0.01	0.03
Benzene	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01
Ethylbenzene	<0.01	<0.01	<0.01
Xylenes	0.01	<0.01	0.01
Total HAP⁴ =	0.04	0.01	0.04

**SWN Production Company, LLC
Linda Greathouse Pad
Produced Water Truck Loading Emissions - Criteria and Hazardous Air Pollutants (Continued)**

Uncaptured Loading Emissions³

Pollutant	Max. lb/hr	Avg. lb/hr	TPY
VOC =	0.16	0.04	0.16
n-Hexane	0.01	<0.01	0.01
Benzene	<0.01	<0.01	<0.01
Toluene	<0.01	<0.01	<0.01
Ethylbenzene	<0.01	<0.01	<0.01
Xylenes	<0.01	<0.01	<0.01
Total HAP⁴ =	0.01	<0.01	0.01

Notes:

¹ AP-42 5.2-4 Eq.1: Loading Loss (lb/1000 gal) = 12.46 *S*P*M/T. Properties based on mixture of 99% water and 1% condensate.

² Uncontrolled emissions that are captured by the collection system are routed to a vapor combustor. Per AP-42 5.2-6, 70% capture efficiency can be assumed for trucks not subject to NSPS. Uncaptured emissions shown represent those not captured by the collection system or controlled by the vapor combustor.

³ Maximum lb/hr based on average hourly truck loading rate. Average lb/hr based on TPY conversion assuming continuous operation.

⁴ Speciated liquids analysis located in Fugitive Emissions Calculations. HAP weight % calculated as % of total hydrocarbons in the sample. All HAP assumed to volatilize from liquids for most conservative emissions estimate.

Pollutant	Wt%
n-Hexane	5.783%
Benzene	0.070%
Toluene	0.390%
Ethylbenzene	0.421%
Xylenes	1.432%
Total HAPs =	8.096%

**SWN Production Company, LLC
Linda Greathouse Pad
Produced Water Truck Loading Emissions - Greenhouse Gases**

Loading Information

Unit ID: **EU-LOAD-PW**
 Fill Method: APC-COMB-TKLD
 Fill Method: Submerged
 Type of Service: Dedicated
 Mode of Operation: Normal
 TOC Em. Factor (tonne/10⁶ gal): ¹ 0.91
 Throughput (10⁶ gal): 15.330
 Control Type: Vapor Return/Combustion
 Vapor Capture Efficiency: ² 70.00%
 Average Fill Rate (gal/hr): 7,500
 Captured Vapors Routed to: Vapor Combustor

Input CH ₄ from Promax =	67.7850%
Input CO ₂ from Promax =	0.9608%

Uncontrolled Loading Emissions^{3,4}

Pollutant	Max. lb/hr	Avg. lb/hr	tonnes/yr	tons/yr
CH ₄	10.20	2.38	9.46	10.42
CH ₄ as CO ₂ e	254.98	59.50	236.41	260.59
CO ₂	0.14	0.03	0.13	0.15
Total CO₂ + CO₂e =	255.13	59.53	236.54	260.74

**SWN Production Company, LLC
Linda Greathouse Pad
Produced Water Truck Loading Emissions - Greenhouse Gases (Continued)**

Uncaptured Loading Emissions^{3, 4}

Pollutant	Max. lb/hr	Avg. lb/hr	tonnes/yr	tons/yr
CH ₄	3.06	0.71	2.84	3.13
CH ₄ as CO ₂ e	76.49	17.85	70.92	78.18
CO ₂	0.04	0.01	0.04	0.04
Total CO₂ + CO₂e =	76.54	17.86	70.96	78.22

API Compendium Table 5-12

Loading Type	Emission Factor (tonne TOC/10⁶ gal)
Rail/Truck - Submerged Loading - Dedicated Normal Service	0.91
Rail/Truck - Submerged Loading - Vapor Balance Service	1.51
Rail/Truck - Splash Loading - Dedicated Normal Service	2.20
Rail/Truck - Splash Loading - Vapor Balance Service	1.51
Marine Loading - Ships/Ocean Barges	0.28
Marine Loading - Barges	0.45

Notes:

¹ API Compendium of Greenhouse Gas Emissions Methodologies for the Oil and Gas Industry, Table 5-12.

² Uncontrolled emissions that are captured by the collection system are routed to a vapor combustor. Per AP-42 5.2-6, 70% capture efficiency can be assumed for trucks not subject to NSPS. Uncaptured emissions shown represent those not captured by the collection system or controlled by the vapor combustor.

³ Maximum lb/hr based on average hourly truck loading rate. Average lb/hr based on TPY conversion assuming continuous operation.

⁴ CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25

SWN Production Company, LLC
Linda Greathouse Pad
Tanks/Loading Vapor Combustor Emissions Calculations - Criteria and Hazardous Air Pollutants

Criteria and Hazardous Air Pollutant Emissions

Unit ID	Pollutant	Emission Factors ¹	Total Captured Emissions ²		Combustor Destruction Efficiency %	Total Controlled Emissions (Post-Capture and Combustion)	
			lb/hr	TPY		lb/hr	TPY
APC-COMB-TKLD	NOx	0.138	-	-	-	4.14	18.13
	CO	0.2755	-	-	-	8.27	36.22
	PM	7.6	-	-	-	0.09	0.39
	VOC	Mass Balance	293.54	1,285.70	98.00%	5.87	25.71
	n-Hexane	Mass Balance	16.97	74.35	98.00%	0.34	1.49
	Benzene	Mass Balance	0.21	0.90	98.00%	<0.01	0.02
	Toluene	Mass Balance	1.15	5.02	98.00%	0.02	0.10
	Ethylbenzene	Mass Balance	1.24	5.41	98.00%	0.02	0.11
	Xylenes	Mass Balance	4.21	18.40	98.00%	0.08	0.35

Notes:

¹ Although a vapor combustor is not considered a flare by design, the function is consistent in that it combusts a waste stream for the purpose of reducing emissions; therefore, flare emission factors for NOx and CO were used to provide the most accurate emissions estimates. Although the combustor is designed to be smokeless, PM emissions have been estimated using AP-42 Table 1.4-1 factor (lb/mmScf) for a conservative estimate.

Hours per Year: 8,760
Number of Combustors: 1

NOx and CO emission factors (lb/mmBtu): *TCEQ Air Permit Technical Guidance for Chemical Sources: Flares and Vapor Oxidizers*: High Btu waste streams (>1,000 Btu/scf) based on heat input to the combustor =

30.00 mmBtu/hr Total Heat Input

² Total captured emissions are based on 100% capture efficiency from storage tanks and 70% capture efficiency from truck loading with 98% destruction efficiency from the vapor combustor based on 8,760 hours of operation per year. Uncaptured vapors reported at loading emission units. Captured emissions from sources controlled by VOC combustor shown in following tables.

SWN Production Company, LLC

Linda Greathouse Pad

Tanks/Loading Vapor Combustor Emissions Calculations - Criteria and Hazardous Air Pollutants (Continued)

Source	Captured VOC Emissions	
	lb/hr	TPY
Condensate Storage Tanks	268.55	1,176.24
Produced Water Storage Tanks	2.12	9.28
Condensate Truck Loading	22.79	99.80
Produced Water Truck Loading	0.08	0.38
Total VOC =	293.54	1,285.70

Source	Captured HAP Emissions (lb/hr)				
	n-Hexane	Benzene	Toluene	Ethylbenzene	Xylenes
Condensate Storage Tanks	15.53	0.19	1.05	1.13	3.85
Produced Water Storage Tanks	0.12	<0.01	0.01	0.01	0.03
Condensate Truck Loading	1.32	0.02	0.09	0.10	0.33
Produced Water Truck Loading	<0.01	<0.01	<0.01	<0.01	<0.01
Total HAP =	16.97	0.21	1.15	1.24	4.21

Source	Captured HAP Emissions (TPY)				
	n-Hexane	Benzene	Toluene	Ethylbenzene	Xylenes
Condensate Storage Tanks	68.02	0.82	4.59	4.95	16.84
Produced Water Storage Tanks	0.54	0.01	0.04	0.04	0.13
Condensate Truck Loading	5.77	0.07	0.39	0.42	1.43
Produced Water Truck Loading	0.02	<0.01	<0.01	<0.01	0.01
Total HAP =	74.35	0.90	5.02	5.41	18.40

**SWN Production Company, LLC
Linda Greathouse Pad
Tanks/Loading Vapor Combustor Emissions Calculations - Greenhouse Gases**

Equipment Information

Unit ID:	<u>APC-COMB-TKLD</u>
Description:	Vapor Combustor
Number of Combustors:	1
Burner Design Capacity (mmBtu/hr):	30.00
Stream HHV (Btu/scf):	2,682
Annual Throughput (mmscf):	97.99
Annual Operating Hours:	8,760

Greenhouse Gas (GHG) Emissions

Pollutant	lb/hr	tonnes/yr	tons/yr
CO ₂	3,509.31	13,944.14	15,370.78
CH ₄	0.07	0.26	0.29
N ₂ O	0.01	0.03	0.03
CH ₄ as CO ₂ e	1.65	6.57	7.24
N ₂ O as CO ₂ e	1.97	7.83	8.63
Total CO₂ + CO₂e =	3,512.94	13,958.54	15,386.66

40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)¹

Carbon Dioxide (CO ₂)	53.06
Methane (CH ₄)	1.00E-03
Nitrous Oxide (N ₂ O)	1.00E-04

Notes:

¹ CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25, N₂O = 298

**SWN Production Company, LLC
Linda Greathouse Pad
Vapor Combustor Pilot Emissions Calculations - Criteria Air Pollutants**

Criteria Air Pollutant Emissions

Unit ID	Pollutant	Emission Factors ¹	Emissions	
		(lb/mmscf)	lb/hr	TPY
EU-PILOT APC-COMB-TKLD	NO _x	100	0.02	0.09
	CO	84	0.01	0.06
	VOC	5.5	<0.01	<0.01
	SO ₂	0.6	<0.01	<0.01
	PM	7.6	<0.01	<0.01

905	Pilot Stream Heat Content (Btu/SCF)
8,760	Pilot Hours/Yr
150	Pilot Gas Flow Rate (SCFH) ²
135,750	Total Pilot Gas Fuel Use (Btu/hr)
1.31	Total Annual Fuel Use (MMSCF)

Notes:

¹ AP-42 Table 1.4-1, -2 (7/98)

² Combustor is equipped with three (3) pilots with a pilot fuel consumption of 50 SCFH per pilot.

**SWN Production Company, LLC
Linda Greathouse Pad
Vapor Combustor Pilot Emissions Calculations - Hazardous Air Pollutants**

Hazardous Air Pollutant Emissions

Unit ID	Pollutant	Emission Factors ¹	Emissions	
		(lb/mmscf)	lb/hr	TPY
EU-PILOT APC-COMB-TKLD	n-Hexane	1.8	<0.01	<0.01
	Formaldehyde	0.075	<0.01	<0.01
	Benzene	0.0021	<0.01	<0.01
	Toluene	0.0034	<0.01	<0.01
Total HAPs =			<0.01	<0.01

905 Pilot Stream Heat Content (Btu/SCF)
8,760 Pilot Hours/Yr
150 Pilot Gas Flow Rate (SCFH)²
135,750 Total Pilot Gas Fuel Use (Btu/hr)
1.31 Total Annual Fuel Use (MMSCF)

Notes:

¹ AP-42 Table 1.4-3 (7/98)

**SWN Production Company, LLC
Linda Greathouse Pad
Vapor Combustor Pilot Emissions Calculations - Greenhouse Gases**

Greenhouse Gas (GHG) Emissions

Unit ID	Pollutant	Emissions		
		lb/hr	tonnes/yr	tons/yr
EU-PILOT APC-COMB-TKLD	CO ₂	15.88	63.10	69.56
	CH ₄	<0.01	<0.01	<0.01
	N ₂ O	<0.01	<0.01	<0.01
	CH ₄ as CO ₂ e	0.01	0.03	0.03
	N ₂ O as CO ₂ e	0.01	0.04	0.04
Total CO₂ + CO₂e =		15.90	63.17	69.63

905 Pilot Stream Heat Content (Btu/SCF)
8,760 Pilot Hours/Yr
150 Pilot Gas Flow Rate (SCFH)²
135,750 Total Pilot Gas Fuel Use (Btu/hr)
1.31 Total Annual Fuel Use (MMSCF)

40 CFR 98 Tables C-1 and C-2 Emission Factors (kg/mmBtu)¹

Carbon Dioxide (CO ₂)	53.06
Methane (CH ₄)	1.00E-03
Nitrous Oxide (N ₂ O)	1.00E-04

Notes:

¹ CO₂e = CO₂ equivalent (Pollutant times GWP multiplier):

40 CFR 98 Table A-1, Global Warming Potential (GWP) multiplier: CO₂ = 1, CH₄ = 25, N₂O = 298

**SWN Production Company, LLC
Linda Greathouse Pad
Fugitive Emissions Calculations - Criteria and Hazardous Air Pollutants and Greenhouse Gases**

Equipment Information

Source Type/Service	Number of Sources ¹	Em. Factor (lb/hr/source) ²	Control Efficiency	TOC lb/hr	TOC TPY	VOC Wt %
Valves - Gas	84	9.92E-03	0.00%	0.83	3.64	24.18%
Flanges - Gas	384	8.60E-04	0.00%	0.33	1.45	24.18%
Compressor Seals - Gas	12	1.94E-02	0.00%	0.23	1.01	24.18%
Relief Valves - Gas	31	1.94E-02	0.00%	0.60	2.63	24.18%
Open-Ended Lines - Gas	0	4.41E-03	0.00%	0.00	0.00	24.18%
Total TOC (Gas Components) =				1.99	8.73	-
Valves - Light Oil	101	5.51E-03	0.00%	0.56	2.45	94.29%
Flanges - Light Oil	398	2.43E-04	0.00%	0.10	0.44	94.29%
Pump Seals - Light Oil	0	2.87E-02	0.00%	0.00	0.00	94.29%
Other - Light Oil	0	1.65E-02	0.00%	0.00	0.00	94.29%
Total TOC (Liquid Components) =				0.66	2.89	-

VOC and Greenhouse Gas Emissions

Source Type/Service	VOC			CH ₄		CO ₂	
	lb/hr	TPY	lb/yr	lb/hr	TPY	lb/hr	TPY
Valves - Gas	0.20	0.88	1,765.07	0.43	1.89	<0.01	0.01
Flanges - Gas	0.08	0.35	699.30	0.17	0.75	<0.01	<0.01
Compressor Seals - Gas	0.06	0.25	493.10	0.12	0.52	<0.01	<0.01
Relief Valves - Gas	0.15	0.64	1,273.84	0.31	1.37	<0.01	0.01
Open-Ended Lines - Gas	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Components in Gas Service =	0.48	2.12	4,231.31	1.03	4.54	0.01	0.03
Valves - Light Oil	0.52	2.30	4,598.04	0.01	0.04	<0.01	<0.01
Flanges - Light Oil	0.09	0.40	797.24	<0.01	0.01	<0.01	<0.01
Pump Seals - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Components in Liquid Service =	0.62	2.73	5,431.20	0.01	0.05	<0.01	<0.01
Total (Gas + Liquid Components) =	1.11	4.85	9,662.51	1.05	4.59	0.01	0.03

SWN Production Company, LLC
Linda Greathouse Pad
Fugitive Emissions Calculations (Continued)

Hazardous Air Pollutant (HAP) Emissions (lb/hr)

Source Type/Service	n-Hexane	Benzene	Toluene	Ethylbenzene	Xylenes	2,2,4-Tri.	Total
Valves - Gas	<0.01	<0.01	<0.01	<0.01	<0.01	0.00	<0.01
Flanges - Gas	<0.01	<0.01	<0.01	<0.01	<0.01	0.00	<0.01
Compressor Seals - Gas	<0.01	<0.01	<0.01	<0.01	<0.01	0.00	<0.01
Relief Valves - Gas	<0.01	<0.01	<0.01	<0.01	<0.01	0.00	<0.01
Open-Ended Lines - Gas	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Components in Gas Service =	0.01	<0.01	<0.01	<0.01	<0.01	0.00	0.01
Valves - Light Oil	0.03	<0.01	<0.01	<0.01	0.01	0.00	0.05
Flanges - Light Oil	0.01	<0.01	<0.01	<0.01	<0.01	0.00	0.01
Pump Seals - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Components in Liquid Service =	0.04	<0.01	<0.01	<0.01	0.01	0.00	0.05
Total (Gas + Liquid Components) =	0.05	<0.01	<0.01	<0.01	0.01	0.00	0.06

Hazardous Air Pollutant (HAP) Emissions (TPY)

Source Type/Service	n-Hexane	Benzene	Toluene	Ethylbenzene	Xylenes	2,2,4-Tri.	Total
Valves - Gas	0.02	<0.01	<0.01	<0.01	<0.01	0.00	0.02
Flanges - Gas	0.01	<0.01	<0.01	<0.01	<0.01	0.00	0.01
Compressor Seals - Gas	<0.01	<0.01	<0.01	<0.01	<0.01	0.00	<0.01
Relief Valves - Gas	0.01	<0.01	<0.01	<0.01	<0.01	0.00	0.01
Open-Ended Lines - Gas	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Components in Gas Service =	0.04	<0.01	<0.01	<0.01	<0.01	0.00	0.04
Valves - Light Oil	0.14	<0.01	0.01	0.01	0.03	0.00	0.20
Flanges - Light Oil	0.02	<0.01	<0.01	<0.01	0.01	0.00	0.03
Pump Seals - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other - Light Oil	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Components in Liquid Service =	0.16	<0.01	0.01	0.01	0.04	0.00	0.23
Total (Gas + Liquid Components) =	0.21	<0.01	0.01	0.01	0.04	0.00	0.27

**SWN Production Company, LLC
Linda Greathouse Pad
Fugitive Emissions Calculations (Continued)**

Typical Component Count per Equipment Type based on Representative Facility³

Source Type/Service	WH	GPU	HT	LPT	FGC	OT	TT-O
Valves - Gas	12	3	2	5	5	0	0
Flanges - Gas	37	15	9	24	33	3	2
Compressor Seals - Gas	0	0	0	0	3	0	0
Relief Valves - Gas	1	3	1	1	1	1	1
Open-Ended Lines - Gas	0	0	0	0	0	0	0
Valves - Light Oil	0	5	6	12	3	6	9
Connectors - Light Oil	0	20	24	48	12	24	30
Pump Seals - Light Oil	0	0	0	0	0	0	0
Other - Light Oil	0	0	0	0	0	0	0

Equipment Type	WH	GPU	HT	LPT	FGC	OT	TT-O
Number of Each Type On Pad =	4	4	2	0	4	8	1

SWN Production Company, LLC
Linda Greathouse Pad
Fugitive Emissions Calculations (Continued)

Speciated Gas Analysis⁴

Component	Molecular Weight	Mole %	Equiv. Wt. Basis	Weight %	HC Weight %	lb/hr	TPY
Hydrogen Sulfide	34.082	0.000%	0.000	0.000%	-	0.00	0.00
Carbon Dioxide	44.010	0.149%	0.066	0.295%	-	0.01	0.03
Nitrogen	28.013	0.513%	0.144	0.646%	-	0.01	0.06
Methane	16.042	71.427%	11.458	51.479%	51.968%	1.03	4.54
Ethane	30.069	17.491%	5.259	23.629%	23.853%	0.47	2.08
Propane	44.096	6.802%	2.999	13.476%	13.603%	0.27	1.19
i-Butane	58.122	0.668%	0.388	1.744%	1.761%	0.04	0.15
n-Butane	58.122	1.828%	1.062	4.773%	4.819%	0.10	0.42
i-Pentane	72.149	0.327%	0.236	1.060%	1.070%	0.02	0.09
n-Pentane	72.149	0.440%	0.317	1.426%	1.440%	0.03	0.13
n-Hexane	86.175	0.107%	0.092	0.414%	0.418%	0.01	0.04
Other Hexanes	86.175	0.135%	0.116	0.523%	0.528%	0.01	0.05
Heptanes (as n-Heptane)	100.202	0.078%	0.078	0.351%	0.354%	0.01	0.03
Benzene	78.114	0.001%	0.001	0.004%	0.004%	<0.01	<0.01
Toluene	92.141	0.002%	0.002	0.008%	0.008%	<0.01	<0.01
Ethylbenzene	106.167	0.000%	0.000	0.001%	0.001%	<0.01	<0.01
Xylenes	106.167	0.001%	0.001	0.005%	0.005%	<0.01	<0.01
2,2,4-Trimethylpentane	114.230	0.000%	0.000	0.000%	0.000%	0.00	0.00
Octanes (as n-Octane)	114.229	0.022%	0.025	0.113%	0.114%	<0.01	0.01
Nonanes (as n-Nonane)	128.255	0.006%	0.008	0.035%	0.035%	<0.01	<0.01
Decanes (as n-Decane)	142.282	0.003%	0.004	0.019%	0.019%	<0.01	<0.01
TOTAL =		100.00%	22.26	100.00%	100.00%	2.01	8.81
		TOTAL HC =	22.05	TOTAL VOC =	24.18%	0.48	2.12
				TOTAL HAP =	0.44%	0.01	0.04

SWN Production Company, LLC
Linda Greathouse Pad
Fugitive Emissions Calculations (Continued)

Speciated Liquids Analysis⁴

Component	Molecular Weight	Mole %	Equiv. Wt. Basis	Weight %	HC Weight %	lb/hr	TPY
Hydrogen Sulfide	34.082	0.000%	0.000	0.000%	-	0.00	0.00
Carbon Dioxide	44.010	0.013%	0.006	0.007%	-	<0.01	<0.01
Nitrogen	28.013	0.026%	0.007	0.009%	-	<0.01	<0.01
Methane	16.042	8.861%	1.421	1.836%	1.836%	0.01	0.05
Ethane	30.069	9.965%	2.996	3.870%	3.871%	0.03	0.11
Propane	44.096	11.708%	5.163	6.668%	6.669%	0.04	0.19
i-Butane	58.122	2.480%	1.441	1.862%	1.862%	0.01	0.05
n-Butane	58.122	9.597%	5.578	7.204%	7.206%	0.05	0.21
i-Pentane	72.149	3.683%	2.657	3.432%	3.433%	0.02	0.10
n-Pentane	72.149	6.541%	4.719	6.095%	6.096%	0.04	0.18
n-Hexane	86.175	5.195%	4.477	5.782%	5.783%	0.04	0.17
Other Hexanes	86.175	5.393%	4.647	6.002%	6.003%	0.04	0.17
Heptanes (as n-Heptane)	100.202	10.008%	10.028	12.952%	12.954%	0.09	0.37
Benzene	78.114	0.069%	0.054	0.070%	0.070%	<0.01	<0.01
Toluene	92.141	0.328%	0.302	0.390%	0.390%	<0.01	0.01
Ethylbenzene	106.167	0.307%	0.326	0.421%	0.421%	<0.01	0.01
Xylenes	106.167	1.044%	1.108	1.432%	1.432%	0.01	0.04
2,2,4-Trimethylpentane	114.230	0.000%	0.000	0.000%	0.000%	0.00	0.00
Octanes (as n-Octane)	114.229	7.566%	8.643	11.162%	11.164%	0.07	0.32
Nonanes (as n-Nonane)	128.255	4.597%	5.896	7.615%	7.616%	0.05	0.22
Decanes (as n-Decane)	142.282	12.619%	17.955	23.190%	23.193%	0.15	0.67
TOTAL =		100.00%	77.43	100.00%	100.00%	0.66	2.89
		TOTAL HC =	77.41	TOTAL VOC =	94.29%	0.62	2.73
				TOTAL HAP =	8.10%	0.05	0.23

Notes:

¹ Component counts taken by equipment type at representative facility and made site-specific according to the number of each equipment type at this site.

² Emission Factor Source: EPA-453/R-95-017. TOC multiplied by pollutant content of streams (weight %) to obtain pollutant emissions.

³ Equipment Type Key: WH = Well Head, GPU = Gas Production Unit, HT = Heater Treater, LPT = Low-Pressure Tower, FGC = Flash Gas Compressor, OT = Oil Tank, TT-O = Tank Truck - Oil

⁴ Analyses located in Appendix A.

**SWN Production Company, LLC
Linda Greathouse Pad
Fugitive Unpaved Haul Road Emissions Calculations**

Facility Data¹

Vehicle Type	Light Vehicles (Pick-ups and Cars)	Medium Trucks (Service Trucks)	Heavy Trucks (Tanker Trucks) ²
Average vehicle weight ((empty + full)/2) (tons)	2	15	23.5
Number of wheels per vehicle type (w)	4	10	18
Average number of round trips/day/vehicle type	10	5	18
Distance per round trip (miles/trip)	1.11	1.11	1.11
Vehicle miles travelled (miles/day)	11.11	5.55	20.47
Number of days operational (days/yr)	365	365	365
Vehicle miles travelled VMT (miles/yr)	4,055.09	2,027.55	7,469.91
Average vehicle speed S (mph)	10	10	10
Average number of round trips/hour/vehicle type	0.56	0.28	1.02
Average number of round trips/year/vehicle type	3,650	1,825	6,724
Estimated maximum number of round trips/hour/vehicle type	3	3	2
Estimated maximum number of round trips/day/vehicle type	7	4	21
Estimated maximum number of round trips/year/vehicle type	2,683	1,533	8,049

190 Average Tanker Volume (bbl)
7,980 Gallons Tanker Volume
1,000 bwpd
2,500 bopd
18.42 Tanker Trucks per Day
2,525 Length Leased Access Road (ft)
408 Longest Pad Side (ft)
5,866 Total Round Trip Feet

Formula & Calculation Inputs

$$E = k(s/12)^a * (W/3)^b * ((365-P) / 365)$$

where:

Days per year
Annual average hours per day of road operations
k = PM Particle Size Multiplier
k = PM10 Particle Size Multiplier
k = PM2.5 Particle Size Multiplier
s = Surface Material Silt Content
P = Number of days > 0.01 inch of rain
a = PM Constant
a = PM10 & PM2.5 Constant
b = PM, PM10, & PM2.5 Constant
Total hourly fleet vehicle miles travelled (miles/hr)
Total annual fleet vehicle miles travelled (miles/yr)³
Average wheels⁴
Average vehicle weight of the fleet (W)⁵
Moisture Ratio
Control Efficiency (CF)

Reference : AP-42, Section 13.2.2 (11/06), Equation 1a and 2

Rate	Units	Comment
365		
18		
4.90	lb/VMT	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM)
1.50	lb/VMT	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM ₁₀)
0.15	lb/VMT	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM _{2.5})
3.9	%	State Default Data from AP-42 Data (1999 NEI Data)
150	days/year	AP-42 Section 13.2.2 (11/06), Figure 13.2.2-1
0.70	unitless	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM)
0.90	unitless	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2 (PM ₁₀ & PM _{2.5})
0.45	unitless	AP-42 Section 13.2.2 (11/06), Table 13.2.2-2
2.06	VMT/hr	
13,552.55	VMT/yr	
13		
15.8	tons	
1.00		Estimated based on 0.2% uncontrolled surface water content assuming no watering
0.00	%	Based on Moisture Ratio and Figure 13.2.2-2 Control

EPA - BID Document 13.2.2 - 1998

Continued on Next Page

SWN Production Company, LLC
Linda Greathouse Pad
Fugitive Unpaved Haul Road Emissions Calculations

Emission Calculations

Vehicle Type	Emission Factors			Control Efficiency (%)	Total Vehicle Miles Travelled		Uncontrolled Emission Rates			Uncontrolled Emission Rates		
	PM (lbs/VMT)	PM ₁₀ (lbs/VMT)	PM _{2.5} (lbs/VMT)		(VMT/hr)	(VMT/yr)	Total PM (lb/hr)	Total PM ₁₀ (lb/hr)	PM _{2.5} (lb/hr)	Total PM (tons/yr)	Total PM ₁₀ (tons/yr)	PM _{2.5} (tons/yr)
Light Vehicles	2.78	0.68	0.07	0.00	0.62	4,055.09	1.72	0.42	0.04	5.64	1.38	0.14
Medium Trucks	2.78	0.68	0.07	0.00	0.31	2,027.55	0.86	0.21	0.02	2.82	0.69	0.07
Heavy Trucks	2.78	0.68	0.07	0.00	1.14	7,469.91	3.16	0.77	0.08	10.38	2.54	0.26
Total =				0.00	2.07	13,552.55	5.74	1.40	0.14	18.84	4.61	0.47

Notes:

- 1) Facility vehicle data based on estimates, GP5.1 and AP-42 13.2.2-2 defaults for industrial unpaved roads
- 2) Tank trucker average vehicle weight as $(W_{(empty)} + W_{(full)})/2 = (7 + 40)/2 = 23.7$ tons
- 3) Average vehicle miles travelled (VMT/yr) as (No. of round trip/vehicle * No. of vehicles/type * Roundtrip miles/trip) * 365 days/yr * No. of vehicle type)
- 4) Average wheels calculated as average of (No. of wheels per vehicle type * No. of vehicle/type)
- 5) Average vehicle fleet calculated as (Average weight of vehicle type * Percentage of each vehicle type on unpaved surface). Percentage of each vehicle type = $VMT_{vehicle\ type}/VMT$
- 6) Minimum one-per-day average pick-up trucks and service trucks even if tanker not required every day.
- 7) Per EPA BID calculations, all emissions based on average trips. Estimated maximum hourly, daily and yearly trips provided for information only.

Calculation of Emission Factors (AP-42, 13.2.2)

Equation 1a: $EF = k(s/12)^a (W/3)^b$ where *k*, *a*, and *b* are empirical constants and
EF = size-specific emission factor (lb/VMT)
s = surface material silt content %
W = mean vehicle weight (tons)

Equation 2: $EF_{ext} = EF * ((365 - P)/365)$ where:
EF_{ext} = annual size-specific emission factor extrapolated for natural mitigation, lb/VMT
EF = emission factor from Equation 1a
P = number of days in a year with at least 0.01 inches of precipitation

Calculation of Emissions

$E = EF_{ext} * VMT/yr * ((1 - CF)/100) * 1 \text{ ton}/2000 \text{ lbs}$ where:
E = annual emissions (tons/yr)
EF_{ext} = annual size-specific emission factor extrapolated for natural mitigation, lb/VMT
CF = control efficiency (%)

ATTACHMENT T: FACILITY-WIDE EMISSION SUMMARY SHEETS

ATTACHMENT T – FACILITY-WIDE CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID #	NO _x		CO		VOC		SO ₂		PM ₁₀		PM _{2.5}		GHG (CO ₂ e)	
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy
EP-ENG1	0.32	1.40	0.64	2.80	0.24	1.05	<0.01	<0.01	0.02	0.09	0.02	0.09	155.19	679.73
EP-ENG2	0.32	1.40	0.64	2.80	0.24	1.05	0.01	0.04	0.02	0.09	0.02	0.09	155.19	679.73
EP-ENG3	0.47	2.06	0.95	4.16	0.36	1.58	<0.01	<0.01	0.03	0.14	0.03	0.14	252.84	1,107.42
EP-ENG4	0.46	2.01	0.75	3.29	0.47	2.06	<0.01	<0.01	0.01	0.04	0.01	0.04	74.96	328.34
EP-GPU1 - EP-GPU4	0.44	1.92	0.36	1.56	0.02	0.12	<0.01	0.01	0.03	0.15	0.03	0.15	468.39	2,051.55
EP-HT1 - EP-HT2	0.12	0.52	0.10	0.44	0.01	0.02	<0.01	<0.01	0.01	0.04	0.01	0.04	117.10	512.89
EP-SH1 - EP-SH2	0.34	1.48	0.28	1.22	0.02	0.08	<0.01	0.01	0.03	0.11	0.03	0.11	351.29	1,538.67
APC-COMB-TKLD	4.16	18.22	8.28	36.28	15.67	68.64	<0.01	<0.01	0.09	0.40	0.09	0.40	3,547.34	15,537.32
TOTAL	6.63	29.02	12.00	52.55	17.03	74.61	0.02	0.08	0.24	1.06	0.24	1.06	5,122.30	22,435.65

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

Note that the emissions from the APC-COMB-TKLD includes uncaptured emissions from loading operations, uncombusted emissions from the tanks and loading operations, as well as combustor pilot emissions.

ATTACHMENT T – FACILITY-WIDE HAP CONTROLLED EMISSIONS SUMMARY SHEET

List all sources of emissions in this table. Use extra pages if necessary.

Emission Point ID #	Formaldehyde		Benzene		Toluene		Ethylbenzene		Xylenes		Hexane		Total HAPs		
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
EP-ENG1	0.02	0.09	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	0.03	0.15
EP-ENG2	0.02	0.09	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	0.03	0.15
EP-ENG3	0.03	0.13	<0.01	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	0.05	0.21
EP-ENG4	0.00	0.06	0.00	<0.01	<0.01	<0.01	0.00	<0.01	<0.01	<0.01	<0.01	-	-	<0.01	0.09
EP-GPU1 - EP-GPU4	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	-	-	-	0.01	0.03	0.01	0.04
EP-HT1 - EP-HT2	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	-	-	-	<0.01	0.01	<0.01	0.01
EP-SH1 - EP-SH2	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	-	-	-	-	-	0.01	0.03	0.01	0.03
APC-COMB-TKLD	<0.01	<0.01	0.01	0.05	0.06	0.27	0.07	0.29	0.22	0.96	0.91	3.97	1.27	5.54	
TOTAL	0.07	0.38	0.02	0.08	0.06	0.28	0.07	0.29	0.22	0.97	0.92	4.04	1.39	6.22	

Annual emissions shall be based on 8,760 hours per year of operation for all emission units except emergency generators.

According to 45CSR14 Section 2.43.e, fugitive emissions are not included in the major source determination because it is not listed as one of the source categories in Table 1. Therefore, fugitive emissions shall not be included in the PTE above.

Note that the emissions from the APC-COMB-TKLD includes uncaptured emissions from loading operations, uncombusted emissions from the tanks and loading operations, as well as combustor pilot emissions.

ATTACHMENT U: CLASS I LEGAL ADVERTISEMENT

Note: Affidavit of Publication will be submitted upon receipt by SWN from the publisher.

AIR QUALITY PERMIT NOTICE Notice of Application

Notice is given that SWN Production Company, LLC has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a G70-B general permit registration for a natural gas production facility (Linda Greathouse Pad) located off Windy Hill Rd, near Bethany, in Brooke County, West Virginia. From intersection of Route 2 and CR 1 (Short Creek Road/Airport Road) above the village of Clearview, WV, along the Ohio River, proceed east 0.60 miles to CR 2/2 (Girty's Point Road) and turn left. Travel 2.55 miles to CR 28 (Huffs Run-Apple Pie Ridge) and turn left. Drive 0.65 miles to the stop sign and turn left to continue on CR 28 (Apple Pie Ridge Road). Drive 1.13 miles to CR 30 (Hukill Run Road) and turn right. The well pad access road will be 0.77 miles on the right. The latitude and longitude coordinates are: 40.204092, -80.60719.

The applicant estimates the potential to discharge the following Regulated Air Pollutants will be:

Nitrogen Oxides (NOx)	29.02 tons/yr
Carbon Monoxide (CO)	52.55 tons/yr
Volatile Organic Compounds (VOC)	79.46 tons/yr
Sulfur Dioxide (SO ₂)	0.08 tons/yr
Particulate Matter (PM)	19.90 tons/yr
Acetaldehyde	0.06 tons/yr
Acrolein	0.06 tons/yr
Benzene	0.08 tons/yr
Ethylbenzene	0.30 tons/yr
Formaldehyde	0.38 tons/yr
Methanol	0.06 tons/yr
n-Hexane	4.25 tons/yr
Toluene	0.29 tons/yr
Xylenes	1.01 tons/yr
Carbon Dioxide	22,331.96 tons/yr
Methane	8.25 tons/yr
Nitrous Oxide	0.04 tons/yr
CO ₂ Equivalent	22,550.43 tons/yr

The change in equipment and operations is planned to begin on or about January 4, 2016. Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57th Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this the 20 of November, 2015

By: SWN Production Company, LLC
Paul Geiger
Senior Vice President – Ops Management
10000 Energy Drive
Spring, TX 77389