



625 Liberty Ave, Suite 1700
Pittsburgh PA 15222
www.eqt.com

TEL: (412) 395-3699
FAX: (412) 395-2156

Alex Bosiljevac
Environmental Coordinator

July 14, 2015

CERTIFIED MAIL # 7015 0640 0000 9694 0764

Mr. William F. Durham, Director
West Virginia Department of Environmental Protection
Division of Air Quality
601 57th Street, SE
Charleston, West Virginia, 25304

**RE: G70 Permit Application
EQT Production Company
WEU-2 Natural Gas Production Site**

Dear Mr. Durham,

Enclosed are two electronic and one original hard copy of a G70-A General Air Permit Application for the WEU-2 Natural Gas Production Well Site. A legal advertisement will be published in the next few days and proof of publication will be forwarded as soon as it is received. Please contact me for payment of the application fee by credit card.


If you have any questions concerning this permit application, please contact me at (412) 395-3699 or by email at abosiljevac@eqt.com.

Sincerely,

A handwritten signature in blue ink, appearing to read 'RAB', with a large, sweeping flourish extending to the right.

Alex Bosiljevac
EQT Corporation

Enclosures

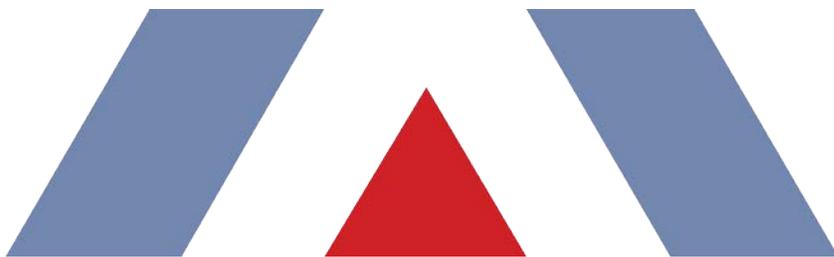

PROJECT REPORT

**EQT Production
WEU-2 Pad**

G70-A Permit Application



Where energy meets innovation.

TRINITY CONSULTANTS
4500 Brooktree Drive
Suite 103
Wexford, PA 15090
(724) 935-2611

July 2015

Trinity 
Consultants

Environmental solutions delivered uncommonly well

TABLE OF CONTENTS

1. INTRODUCTION	4
1.1. FACILITY AND PROJECT DESCRIPTION	4
1.2. SOURCE STATUS	4
1.3. G70-A APPLICATION ORGANIZATION	5
2. SAMPLE EMISSION SOURCE CALCULATIONS	6
3. REGULATORY DISCUSSION	7
3.1. Prevention of Significant Deterioration (PSD) Source Classification	7
3.2. Title V Operating Permit Program	7
3.3. New Source Performance Standards	7
3.3.1. NSPS Subparts D, Da, Db, and Dc	8
3.3.2. NSPS Subparts K, Ka, and Kb	8
3.3.3. NSPS Subpart OOOO—Crude Oil and Natural Gas Production, Transmission, and Distribution	8
3.3.4. Non-Applicability of All Other NSPS	9
3.4. National Emission Standards for Hazardous Air Pollutants (NESHAP)	9
3.4.1. 40 CFR 63 Subpart HH – Oil and Natural Gas Production Facilities	9
3.4.2. 40 CFR 63 Subpart JJJJJ – Industrial, Commercial, and Institutional Boilers	9
3.5. West Virginia SIP Regulations	9
3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers	9
3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor	10
3.5.3. 45 CSR 6: Control of Air Pollution from the Combustion of Refuse	10
3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources	10
3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter	10
3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks	10
3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants	10
3.5.8. Non-Applicability of Other SIP Rules	11
4. G70-A APPLICATION FORMS	12
ATTACHMENT A: CURRENT BUSINESS CERTIFICATE	
ATTACHMENT B: PROCESS DESCRIPTION	
ATTACHMENT C: DESCRIPTION OF FUGITIVE EMISSIONS	
ATTACHMENT D: PROCESS FLOW DIAGRAM	
ATTACHMENT E: PLOT PLAN	
ATTACHMENT F: AREA MAP	
ATTACHMENT G: EMISSION UNIT DATA SHEETS AND G70-A SECTION APPLICABILITY FORM	
ATTACHMENT H: AIR POLLUTION CONTROL DEVICE DATA SHEET	

ATTACHMENT I: EMISSION CALCULATIONS

ATTACHMENT J: CLASS I LEGAL ADVERTISEMENT

ATTACHMENT K: ELECTRONIC SUBMITTAL

ATTACHMENT L: GENERAL PERMIT REGISTRATION APPLICATION FEE

ATTACHMENT M: SITING CRITERIA WAIVER (*NOT APPLICABLE*)

ATTACHMENT N: MATERIAL SAFETY DATA SHEET (*NOT APPLICABLE*)

ATTACHMENT O: EMISSION SUMMARY SHEET

1. INTRODUCTION

EQT Production Company (EQT) is submitting this Class II General Permit (G70-A) application to the West Virginia Department of Environmental Protection (WVDEP) for the WEU-2 Wellpad, an existing natural gas production well pad, located in Doddridge County, West Virginia. The WEU-2 pad is currently operating under R13 permit number R13-3049. The proposed general permit application will consolidate all authorized and proposed equipment under a single permit.

1.1. FACILITY AND PROJECT DESCRIPTION

The WEU-2 pad is a natural gas production facility that currently consists of seven (7) natural gas wells and will be drilling four (4) additional wells. Natural gas and liquids (including water and condensate) are extracted from deposits underneath the surface. Natural gas is transported from the well to a gas line for additional processing and compression, as necessary. The liquids produced are stored in storage vessels.

The WEU-2 pad consists of the following equipment:

- > Twenty-one (21) 210 barrel (bbl) storage tanks for condensate/water (produced fluids) controlled by one (1) existing combustor rated at 11.66 MMBtu/hr;
- > One (1) line heater, rated at 1.54 MMBtu/hr (heat input);
- > One (1) line heater, rated at 1.15 MMBtu/hr (heat input);
- > Five (5) line heaters, each rated at 0.77 MMBtu/hr (heat input);
- > Two (2) thermoelectric generators (TEGs) rated at 0.013 MMBtu/hr; and
- > Produced fluid truck loading.

This application seeks to permit the following equipment at the WEU-2 pad:

- > Twelve (12) 400 barrel (bbl) storage tanks for condensate/water (produced fluids) controlled by an enclosed combustor;
- > One (1) 140 bbl storage tank for sand and produced fluids from the sand separator controlled by an aforementioned combustor;
- > One (1) thermoelectric generator (TEG) rated at 0.013 MMBtu/hr ;
- > One (1) enclosed combustor rated at 11.66 MMBtu/hr; and
- > Four (4) line heaters, each rated at 1.54 MMBtu/hr (heat input).

Additionally, this application

- > Seeks to increase the site-wide liquid throughput loaded at the facility; and
- > Remove the twenty-one (21) 210 bbl storage tanks that are currently permitted.

A process flow diagram is included as Attachment D.

1.2. SOURCE STATUS

WVDEP must make stationary source determinations on a case-by-case basis using the guidance under the Clean Air Act (CAA) and EPA's and WVDEP's implementing regulations. The definition of stationary source in 40 CFR 51.166(b) includes the following:

“(6) Building, structure, facility, or installation means all of the pollutant emitting activities which belong to the same industrial grouping, are located on or more contiguous or adjacent properties, and are under control of the same person (or persons under common control).”

Other additional pollutant emitting facilities should be aggregated with the proposed WEU-2 Pad for air permitting purposes if, and only if, all three elements of the “stationary source” definition above are fulfilled.

WVDEP had previously determined that the WEU-2 pad is a separate stationary source when the current R-13 permit was issued. There are no Marcellus facilities within a quarter-mile radius of the WEU-2 Pad. The nearest wellpad, WEU-1, is located approximately 3,168 feet southwest of WEU-2. Therefore, the WEU-2 pad should continue to be considered a separate stationary source with respect to permitting programs, including Title V and Prevention of Significant Deterioration (PSD). As discussed in this application, the facility is a minor source of air emissions with respect to New Source Review (NSR) and Title V permitting.

1.3. G70-A APPLICATION ORGANIZATION

This West Virginia Code of State Regulations, Title 45 (CSR) Series 13 (45 CSR 13) G70-A permit application is organized as follows:

- > Section 2: Sample Emission Source Calculations;
- > Section 3: Regulatory Discussion;
- > Section 4: G70-A Application Forms;
- > Attachment A: Current Business Certificate;
- > Attachment B: Process Description;
- > Attachment C: Description of Fugitive Emissions;
- > Attachment D: Process Flow Diagram;
- > Attachment E: Plot Plan;
- > Attachment F: Area Map;
- > Attachment G: Emission Unit Data Sheets and G70-A Section Applicability Form;
- > Attachment H: Air Pollution Control Device Sheets;
- > Attachment I: Emission Calculations;
- > Attachment J: Class I Legal Advertisement;
- > Attachment K: Electronic Submittal;
- > Attachment L: General Permit Registration Application Fee;
- > Attachment M: Siting Criteria Waiver (*not applicable*);
- > Attachment N: Material Safety Data Sheet (*not applicable*); and
- > Attachment O: Emissions Summary Sheet.

2. SAMPLE EMISSION SOURCE CALCULATIONS

The characteristics of air emissions from the existing natural gas production operations, along with the methodology for calculating emissions, are briefly described in this section of the application. Detailed emission calculations are presented in Attachment I of this application.

Emissions from this project will result from natural gas combustion in the line heaters and TEGs, as well as storage of organic liquids in storage tanks and loading of organic liquids into tank trucks. In addition, fugitive emissions will result from component leaks from the operation of the station. The methods by which emissions from each of these source types, as well as the existing source types, are calculated are summarized below.

- > **Line Heaters and TEGs:** Potential emissions of criteria pollutants and HAPs are calculated using U.S. EPA's AP-42 factors for natural gas external combustion.¹ These calculations assume a site-specific heat content of natural gas. Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.² Please note that potential emissions of NO_x, CO, PM, SO₂ and GHGs from the combustor are also calculated according to the aforementioned methodologies.
- > **Fugitive Equipment Leaks:** Emissions of VOC and HAPs from leaking equipment components have been estimated using facility estimated component counts and types along with *Table 2-4: Oil & Gas Production Operations Average Emission Factors, Protocol for Equipment Leak Emission Estimates, EPA 453/R-95-017, November 1995*. Emission factors used are based on average measured TOC from component types indicated in gas service at O&G Production Operations. Greenhouse gas emissions from component leaks are calculated according to the procedures in 40 CFR 98 Subpart W.³
- > **Storage Tanks:** Working, breathing and flashing emissions of VOC and HAPs from the condensate/water stored in the tanks at the facility are calculated using API E&P TANK v2.0.
- > **Tank Truck Loading:** Emissions of VOC and HAPs from the loading of organic liquids from storage tanks to tank truck are calculated using U.S. EPA's AP-42 Chapter 5 Section 2 factors.⁴
- > **Haul Roads:** Fugitive dust emitted from facility roadways has been estimated using projected vehicle miles traveled along with U.S. EPA's AP-42 factors for unpaved haul roads.⁵

¹ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 1.4, Natural Gas Combustion, Supplement D, July 1998.

² 40 CFR 98 Subpart C, *General Stationary Fuel Combustion Sources*, Tables C-1 and C-2.

³ 40 CFR 98 Subpart W, *Petroleum and Natural Gas Systems*, Section 98.233(r), *Population Count and Emission Factors*.

⁴ U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 5.2, Transportation And Marketing Of Petroleum Liquids, June 2008.

⁵ U.S. EPA, AP 42, Fifth Edition, Volume I, Section 13.2.2, Unpaved Roads, November 2006.

3. REGULATORY DISCUSSION

This section documents the applicability determinations made for Federal and State air quality regulations. In this section, applicability or non-applicability of the following regulatory programs is addressed:

- > Prevention of Significant Deterioration (PSD) permitting;
- > Title V of the 1990 Clean Air Act Amendments;
- > New Source Performance Standards (NSPS);
- > National Emission Standards for Hazardous Air Pollutants (NESHAP); and
- > West Virginia State Implementation Plan (SIP) regulations.

This review is presented to supplement and/or add clarification to the information provided in the WVDEP G70-A permit application forms.

In addition to providing a summary of applicable requirements, this section of the application also provides non-applicability determinations for certain regulations, allowing the WVDEP to confirm that identified regulations are not applicable to the wellpad. Note that explanations of non-applicability are limited to those regulations for which there may be some question of applicability specific to the operations at the wellpad. Regulations that are categorically non-applicable are not discussed (e.g., NSPS Subpart J, Standards of Performance for Petroleum Refineries).

3.1. PREVENTION OF SIGNIFICANT DETERIORATION (PSD) SOURCE CLASSIFICATION

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration (PSD). PSD regulations apply when a major source makes a change, such as installing new equipment or modifying existing equipment, and a significant increase in emissions results from the change. The wellpad is not a major source with respect to the PSD program since its potential emissions are below all the PSD thresholds. As such, PSD permitting is not triggered by this construction activity. EQT will monitor future construction activities at the site closely and will compare any future increase in emissions with the PSD thresholds to ensure these activities will not trigger this program.

3.2. TITLE V OPERATING PERMIT PROGRAM

Title 40 of the Code of Federal Regulations Part 70 (40 CFR 70) establishes the federal Title V operating permit program. West Virginia has incorporated the provisions of this federal program in its Title V operating permit program in West Virginia Code of State Regulations (CSR) 45-30. The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP and 100 tpy of all other regulated pollutants.⁶ The potential emissions of all regulated pollutants are below the corresponding threshold(s) at this facility after the proposed project. Therefore, the wellpad is not a major source for Title V purposes.

3.3. NEW SOURCE PERFORMANCE STANDARDS

New Source Performance Standards (NSPS), located in 40 CFR 60, require new, modified, or reconstructed sources to control emissions to the level achievable by the best demonstrated technology as specified in the applicable

⁶ On June 23, 2014, the U.S Supreme Court decision in the case of *Utility Air Regulatory Group v. EPA* effectively changed the permitting procedures for GHGs under the PSD and Title V programs.

provisions. Moreover, any source subject to an NSPS is also subject to the general provisions of NSPS Subpart A, except where expressly noted. The following is a summary of applicability and non-applicability determinations for NSPS regulations of relevance to the wellpad.

3.3.1. NSPS Subparts D, Da, Db, and Dc

These subparts apply to steam generating units of various sizes, all greater than 10 MMBtu/hr. The proposed project does not include any steam generating units, therefore the requirements of these subparts do not apply.

3.3.2. NSPS Subparts K, Ka, and Kb

These subparts apply to storage tanks of certain sizes constructed, reconstructed, or modified during various time periods. Subpart K applies to storage tanks constructed, reconstructed, or modified prior to 1978, and Subpart Ka applies to those constructed, reconstructed, or modified prior to 1984. Both Subparts K and Ka apply to storage tanks with a capacity greater than 40,000 gallons. Subpart Kb applies to volatile organic liquid (VOL) storage tanks constructed, reconstructed, or modified after July 23, 1984 with a capacity equal to or greater than 75 m³ (~19,813 gallons). All of the tanks at the wellpad have a capacity of 19,813 gallons or less. As such, Subparts K, Ka, and Kb do not apply to the storage tanks at the wellpad.

3.3.3. NSPS Subpart OOOO—Crude Oil and Natural Gas Production, Transmission, and Distribution

Subpart OOOO – *Standards of Performance for Crude Oil and Natural Gas Production, Transmission, and Distribution*, applies to affected facilities that commenced construction, reconstruction, or modification after August 23, 2011. This NSPS was published in the Federal Register on August 16, 2012, and has been subsequently amended. The list of potentially affected facilities includes:

- > Gas wellheads
- > Centrifugal compressors located between the wellhead and the point of custody transfer to the natural gas transmission and storage segment
- > Reciprocating compressors located between the wellhead and the point of custody transfer to the natural gas transmission and storage segment
- > Continuous bleed natural gas-driven pneumatic controllers with a bleed rate of > 6 scfh located between the wellhead and the point of custody transfer to the natural gas transmission and storage segment (excluding natural gas processing plants)
- > Continuous bleed natural gas-driven pneumatic controllers located at natural gas processing plants
- > Storage vessels in the production, processing, or transmission and storage segments
- > Sweetening units located onshore that process natural gas produced from either onshore or offshore wells

There will be twelve (12) produced fluid storage vessels and one (1) sand separator storage vessel at the wellpad. Emissions from the proposed storage vessels will be controlled an enclosed combustor with a destruction efficiency greater than 95 percent. The storage vessels at the facility will each have potential VOC emissions less than 6 tpy based on the permit application materials and enforceable limits to be included in the G70-A permit. As such, per 60.5365(e), the tanks are not storage vessel affected facilities under the rule.

The pneumatic controllers were ordered and installed after August 23, 2011 and are therefore potentially subject to NSPS OOOO. Per 60.5365(d)(2), a pneumatic controller affected facility is a single continuous bleed natural gas driven pneumatic controller operating at a natural gas bleed rate greater than 6 scfh. No pneumatic controllers installed will meet the definition of a pneumatic controller affected facility. Therefore, these units are not subject to the requirements of Subpart OOOO.

3.3.4. Non-Applicability of All Other NSPS

NSPS are developed for particular industrial source categories. Other than NSPS developed for natural gas processing plants (Subparts 0000) and associated equipment (Subparts D-Dc and K-Kb), the applicability of a particular NSPS to the wellpad can be readily ascertained based on the industrial source category covered. All other NSPS are categorically not applicable to the proposed project.

3.4. NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS (NESHAP)

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The wellpad is an Area (minor) source of HAP since its potential emissions of HAP are less than the 10/25 major source thresholds. NESHAP apply to sources in specifically regulated industrial source categories (Clean Air Act Section 112(d)) or on a case-by-case basis (Section 112(g)) for facilities not regulated as a specific industrial source type. Besides 40 CFR 63 Subpart A (NESHAP Subpart A), which is similar to 40 CFR 60 Subpart A (NSPS Subpart A), the following NESHAP could potentially apply to the wellpad:

- > 40 CFR Part 63 Subpart HH – Oil and Natural Gas Production Facilities
- > 40 CFR Part 63 Subpart JJJJJJ – Industrial, Commercial, and Institutional Boilers

The applicability of these NESHAP Subparts is discussed in the following sections.

3.4.1. 40 CFR 63 Subpart HH - Oil and Natural Gas Production Facilities

This standard contains requirements for both major and area sources of HAP. At area sources, the only affected source is a triethylene glycol dehydration unit (§63.760(b)(2)). The wellpad does not include a triethylene glycol dehydration unit; therefore the requirements of this subpart do not apply.

3.4.2. 40 CFR 63 Subpart JJJJJJ - Industrial, Commercial, and Institutional Boilers

This MACT standard applies to industrial, commercial, and institutional boilers of various sizes and fuel types at area sources. The wellpad does not include any boilers, or gas fired heaters; therefore the requirements of this subpart do not apply.

3.5. WEST VIRGINIA SIP REGULATIONS

The wellpad is potentially subject to regulations contained in the West Virginia Code of State Regulations, Chapter 45 (Code of State Regulations). The Code of State Regulations fall under two main categories, those regulations that are generally applicable (e.g., permitting requirements), and those that have specific applicability (e.g., PM standards for manufacturing equipment).

3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers

45 CSR 2 applies to fuel burning units, defined as equipment burning fuel “for the primary purpose of producing heat or power by indirect heat transfer”. The TEGs and line heaters are fuel burning units and therefore must comply with this regulation. Per 45 CSR 2-3, opacity of emissions from units shall not exceed 10 percent. Per 45 CSR 2-4, PM emissions from the unit will not exceed a level of 0.09 multiplied by the heat design input in MMBtu/hr of the unit.

3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor

According to 45 CSR 4-3:

No person shall cause, suffer, allow or permit the discharge of air pollutants which cause or contribute to an objectionable odor at any location occupied by the public.

The wellpad is generally subject to this requirement. However, due to the nature of the process at the wellpad, production of objectionable odor from the wellpad during normal operation is unlikely.

3.5.3. 45 CSR 6: Control of Air Pollution from the Combustion of Refuse

45 CSR 6 applies to activities involving incineration of refuse, defined as “the destruction of combustible refuse by burning in a furnace designed for that purpose. For the purposes of this rule, the destruction of any combustible liquid or gaseous material by burning in a flare or flare stack, thermal oxidizer or thermal catalytic oxidizer stack shall be considered incineration.” The enclosed combustors are incinerators and therefore must comply with this regulation. Per 45 CSR 6-4.3, opacity of emissions from this unit shall not exceed 20 percent, except as provided by 4.4. PM emissions from this unit will not exceed the levels calculated in accordance with 6-4.1

3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources

45 CSR 16-1 incorporates the federal Clean Air Act (CAA) standards of performance for new stationary sources set forth in 40 CFR Part 60 by reference. As such, by complying with all applicable requirements of 40 CFR Part 60 at the wellpad, EQT will be complying with 45 CSR 16.

3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter

According to 45 CSR 17-3.1:

No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property lines of the property on which the discharge originates or at any public or residential location, which causes or contributes to statutory air pollution.

Due to the nature of the activities at the wellpad, it is unlikely that fugitive particulate matter emissions will be emitted under normal operating conditions. However, EQT will take measures to ensure any fugitive particulate matter emissions will not cross the property boundary should any such emissions occur.

3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks

45 CSR 21-28 applies to any fixed roof petroleum liquid storage tank with a capacity greater than 40,000 gallons. The capacity of each storage tank proposed for the wellpad is less than 40,000 gallons; therefore, 45 CSR 21-28 will not apply to the petroleum liquid storage tanks at this wellpad.

3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants

45 CSR 34-1 incorporates the federal Clean Air Act (CAA) national emissions standards for hazardous air pollutants (NESHAPs) as set forth in 40 CFR Parts 61 and 63 by reference. As such, by complying with all applicable requirements of 40 CFR Parts 61 and 63 at the wellpad, EQT will be complying with 45 CSR 34. Note that there are no applicable requirements under 40 CFR Parts 61 and 63 for the wellpad.

3.5.8. Non-Applicability of Other SIP Rules

A thorough examination of the West Virginia SIP rules with respect to applicability at the wellpad reveals many SIP regulations that do not apply or impose additional requirements on operations. Such SIP rules include those specific to a particular type of industrial operation that is categorically not applicable to the wellpad.

4. G70-A APPLICATION FORMS

The WVDEP permit application forms contained in this application include all applicable G70-A application forms including the required attachments.



WEST VIRGINIA
 DEPARTMENT OF ENVIRONMENTAL PROTECTION
 DIVISION OF AIR QUALITY
 601 57th Street, SE
 Charleston, WV 25304
 Phone: (304) 926-0475 • www.dep.wv.gov/daq

APPLICATION FOR GENERAL PERMIT REGISTRATION
 CONSTRUCT, MODIFY, RELOCATE OR ADMINISTRATIVELY UPDATE
 A STATIONARY SOURCE OF AIR POLLUTANTS

- CONSTRUCTION MODIFICATION RELOCATION CLASS I ADMINISTRATIVE UPDATE
 CLASS II ADMINISTRATIVE UPDATE

CHECK WHICH TYPE OF GENERAL PERMIT REGISTRATION YOU ARE APPLYING FOR:

- | | |
|---|---|
| <input type="checkbox"/> G10-D – Coal Preparation and Handling | <input type="checkbox"/> G40-C – Nonmetallic Minerals Processing |
| <input type="checkbox"/> G20-B – Hot Mix Asphalt | <input type="checkbox"/> G50-B – Concrete Batch |
| <input type="checkbox"/> G30-D – Natural Gas Compressor Stations | <input type="checkbox"/> G60-C – Class II Emergency Generator |
| <input type="checkbox"/> G33-A – Spark Ignition Internal Combustion Engines | <input type="checkbox"/> G65-C – Class I Emergency Generator |
| <input type="checkbox"/> G35-A – Natural Gas Compressor Stations (Flare/Glycol Dehydration Unit) | <input checked="" type="checkbox"/> G70-A – Class II Oil and Natural Gas Production Facility |

SECTION I. GENERAL INFORMATION

1. Name of applicant (as registered with the WV Secretary of State's Office): EQT Production Company		2. Federal Employer ID No. (FEIN): 25-0724685	
3. Applicant's mailing address: 625 Liberty Avenue, Suite 1700 Pittsburgh, PA 15222		4. Applicant's physical address: West Union, WV 26456	
5. If applicant is a subsidiary corporation, please provide the name of parent corporation:			
6. WV BUSINESS REGISTRATION. Is the applicant a resident of the State of West Virginia? <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO – IF YES , provide a copy of the Certificate of Incorporation/ Organization / Limited Partnership (one page) including any name change amendments or other Business Registration Certificate as Attachment A . – IF NO , provide a copy of the Certificate of Authority / Authority of LLC / Registration (one page) including any name change amendments or other Business Certificate as Attachment A .			

SECTION II. FACILITY INFORMATION

7. Type of plant or facility (stationary source) to be constructed, modified, relocated or administratively updated (e.g., coal preparation plant, primary crusher, etc.): Natural gas production wellsite	8a. Standard Industrial Classification Classification (SIC) code: 1311	AND	8b. North American Industry System (NAICS) code: 211111
9. DAQ Plant ID No. (for existing facilities only): 017-00050	10. List all current 45CSR13 and other General Permit numbers associated with this process (for existing facilities only): __R13-3049_____ _____		

A: PRIMARY OPERATING SITE INFORMATION

11A. Facility name of primary operating site: WEU-2 Pad _____	12A. Address of primary operating site: Mailing: 625 Liberty Avenue, Suite 1700, Pittsburgh, PA 15222 Physical: West Union, WV 26456 _____	
13A. Does the applicant own, lease, have an option to buy, or otherwise have control of the proposed site? <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO – IF YES , please explain: Property is leased and held under production rights _____ – IF NO , YOU ARE NOT ELIGIBLE FOR A PERMIT FOR THIS SOURCE.		
14A. – For Modifications or Administrative Updates at an existing facility, please provide directions to the present location of the facility from the nearest state road; – For Construction or Relocation permits, please provide directions to the proposed new site location from the nearest state road. Include a MAP as Attachment F . Head North on I-79 to exit 119 at Clarksburg, turn left on US route 50 and travel West for 27.8 miles. Take a left at Doddridge County High School onto Bulldog Drive. After 0.3 miles, Take the first left and stay left at the first fork. The pad will be 0.8 miles at the end of the road.		
15A. Nearest city or town: West Union	16A. County: Doddridge	17A. UTM Coordinates: Northing (KM): 4,347.046 Easting (KM): 519.714 Zone: 17
18A. Briefly describe the proposed new operation or change (s) to the facility: Construction and operation of four (4) additional natural gas wellheads, twelve (12) 400-bbl condensate storage vessels, one (1) thermoelectric generator, one (1) 140-bbl sand separator storage vessel controlled by an enclosed combustion device, four (4) in-line heaters, and one (1) combustor.		19A. Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits): Latitude: <u>39.27255°</u> Longitude: <u>-80.77145°</u>

B: 1ST ALTERNATE OPERATING SITE INFORMATION (only available for G20, G40, & G50 General Permits)

11B. Name of 1 st alternate operating site: _N/A_____ _____	12B. Address of 1 st alternate operating site: Mailing: _____ Physical: _____ _____
13B. Does the applicant own, lease, have an option to buy, or otherwise have control of the proposed site? <input type="checkbox"/> YES <input type="checkbox"/> NO – IF YES , please explain: _____ _____ – IF NO , YOU ARE NOT ELIGIBLE FOR A PERMIT FOR THIS SOURCE.	

14B. – For Modifications or Administrative Updates at an existing facility, please provide directions to the present location of the facility from the nearest state road; – For Construction or Relocation permits, please provide directions to the proposed new site location from the nearest state road. Include a MAP as Attachment F. <hr/> <hr/> <hr/>		
15B. Nearest city or town:	16B. County:	17B. UTM Coordinates: Northing (KM): _____ Easting (KM): _____ Zone: _____
18B. Briefly describe the proposed new operation or change (s) to the facility:		19B. Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits): Latitude: _____ Longitude: _____

C: 2ND ALTERNATE OPERATING SITE INFORMATION (only available for G20, G40, & G50 General Permits):

11C. Name of 2 nd alternate operating site: _N/A_____	12C. Address of 2 nd alternate operating site: Mailing: _____ Physical: _____	
13C. Does the applicant own, lease, have an option to buy, or otherwise have control of the proposed site? <input type="checkbox"/> YES <input type="checkbox"/> NO – IF YES , please explain: _____ _____ – IF NO , YOU ARE NOT ELIGIBLE FOR A PERMIT FOR THIS SOURCE.		
14C. – For Modifications or Administrative Updates at an existing facility, please provide directions to the present location of the facility from the nearest state road; – For Construction or Relocation permits, please provide directions to the proposed new site location from the nearest state road. Include a MAP as Attachment F. <hr/> <hr/> <hr/>		
15C. Nearest city or town:	16C. County:	17C. UTM Coordinates: Northing (KM): _____ Easting (KM): _____ Zone: _____
18C. Briefly describe the proposed new operation or change (s) to the facility:		19C. Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits): Latitude: _____ Longitude: _____

<p>20. Provide the date of anticipated installation or change:</p> <p style="text-align: center;">____/____/2015____</p> <p><input type="checkbox"/> If this is an After-The-Fact permit application, provide the date upon which the proposed change did happen: :</p> <p style="text-align: center;">____/____/____</p>	<p>21. Date of anticipated Start-up if registration is granted:</p> <p style="text-align: center;">____/____/2015____</p>
<p>22. Provide maximum projected Operating Schedule of activity/activities outlined in this application if other than 8760 hours/year. (Note: anything other than 24/7/52 may result in a restriction to the facility's operation).</p> <p>Hours per day <u>24</u> Days per week <u>7</u> Weeks per year <u>52</u> Percentage of operation <u>100</u></p>	

SECTION III. ATTACHMENTS AND SUPPORTING DOCUMENTS

<p>23. Include a check payable to WVDEP – Division of Air Quality with the appropriate application fee (per 45CSR22 and 45CSR13).</p>
<p>24. Include a Table of Contents as the first page of your application package.</p>
<p>All of the required forms and additional information can be found under the Permitting Section (General Permits) of DAQ's website, or requested by phone.</p>
<p>25. Please check all attachments included with this permit application. Please refer to the appropriate reference document for an explanation of the attachments listed below.</p> <ul style="list-style-type: none"> <input checked="" type="checkbox"/> ATTACHMENT A : CURRENT BUSINESS CERTIFICATE <input checked="" type="checkbox"/> ATTACHMENT B: PROCESS DESCRIPTION <input checked="" type="checkbox"/> ATTACHMENT C: DESCRIPTION OF FUGITIVE EMISSIONS <input checked="" type="checkbox"/> ATTACHMENT D: PROCESS FLOW DIAGRAM <input checked="" type="checkbox"/> ATTACHMENT E: PLOT PLAN <input checked="" type="checkbox"/> ATTACHMENT F: AREA MAP <input checked="" type="checkbox"/> ATTACHMENT G: EQUIPMENT DATA SHEETS AND REGISTRATION SECTION APPLICABILITY FORM <input checked="" type="checkbox"/> ATTACHMENT H: AIR POLLUTION CONTROL DEVICE SHEETS <input checked="" type="checkbox"/> ATTACHMENT I: EMISSIONS CALCULATIONS <input checked="" type="checkbox"/> ATTACHMENT J: CLASS I LEGAL ADVERTISEMENT <input checked="" type="checkbox"/> ATTACHMENT K: ELECTRONIC SUBMITTAL <input checked="" type="checkbox"/> ATTACHMENT L: GENERAL PERMIT REGISTRATION APPLICATION FEE <input type="checkbox"/> ATTACHMENT M: SITING CRITERIA WAIVER (<i>Not Applicable</i>) <input type="checkbox"/> ATTACHMENT N: MATERIAL SAFETY DATA SHEETS (MSDS) (<i>Not Applicable</i>) <input checked="" type="checkbox"/> ATTACHMENT O: EMISSIONS SUMMARY SHEETS <input type="checkbox"/> OTHER SUPPORTING DOCUMENTATION NOT DESCRIBED ABOVE (Equipment Drawings, Aggregation Discussion, etc.) (<i>Not Applicable</i>) <p>Please mail an original and two copies of the complete General Permit Registration Application with the signature(s) to the DAQ Permitting Section, at the address shown on the front page of this application. Please DO NOT fax permit applications. For questions regarding applications or West Virginia Air Pollution Rules and Regulations, please refer to the website shown on the front page of the application or call the phone number also provided on the front page of the application.</p>

SECTION IV. CERTIFICATION OF INFORMATION

This General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of a Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, Emission Inventory, Certified Emission Statement, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. Any administratively incomplete or improperly signed or unsigned Registration Application will be returned to the applicant.

FOR A CORPORATION (domestic or foreign)

[X] I certify that I am a President, Vice President, Secretary, Treasurer or in charge of a principal business function of the corporation

FOR A PARTNERSHIP

[] I certify that I am a General Partner

FOR A LIMITED LIABILITY COMPANY

[] I certify that I am a General Partner or General Manager

FOR AN ASSOCIATION

[] I certify that I am the President or a member of the Board of Directors

FOR A JOINT VENTURE

[] I certify that I am the President, General Partner or General Manager

FOR A SOLE PROPRIETORSHIP

[] I certify that I am the Owner and Proprietor

[X] I hereby certify that (please print or type) Kenneth Kirk is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Office of Air Quality immediately, and/or,

I hereby certify that all information contained in this General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible

Signature [Handwritten Signature] 7-14-15
Responsible Official Date

Name & Title Kenneth Kirk, Executive Vice President

Signature
Authorized Representative (if applicable) Date

Applicant's Name Alex Bosiljevac - Environmental Coordinator

Phone & Fax 412-395-3699 412-395-7027
Phone Fax

Email abosiljevac@egt.com

ATTACHMENT A

Current Business Certificate

**WEST VIRGINIA
STATE TAX DEPARTMENT
BUSINESS REGISTRATION
CERTIFICATE**

ISSUED TO:
**EQT PRODUCTION COMPANY
625 LIBERTY AVE 1700
PITTSBURGH, PA 15222-3114**

BUSINESS REGISTRATION ACCOUNT NUMBER: 1022-8081

This certificate is issued on: 08/4/2010

*This certificate is issued by
the West Virginia State Tax Commissioner
in accordance with Chapter 11, Article 12, of the West Virginia Code*

*The person or organization identified on this certificate is registered
to conduct business in the State of West Virginia at the location above.*

This certificate is not transferrable and must be displayed at the location for which issued.
This certificate shall be permanent until cessation of the business for which the certificate of registration
was granted or until it is suspended, revoked or cancelled by the Tax Commissioner.

Change in name or change of location shall be considered a cessation of the business and a new
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of
this certificate displayed at every job site within West Virginia.

ATTACHMENT B

Process Description

ATTACHMENT B: PROCESS DESCRIPTION

This project involves the construction and operation of twelve (12) produced fluid storage tanks, one (1) sand separator storage tank, four (4) line heaters, one (1) thermoelectric generator, and one (1) enclosed combustor at an existing natural gas production wellpad operation (WEU-2). Additionally, this application seeks to increase the liquid throughputs at the wellpad and remove the twenty-one (21) storage tanks

The WEU-2 wellpad currently consists of seven (7) wells, each with the same basic operation. Four (4) additional wells will be added with this project. The incoming gas stream from the underground wells passes through a sand separator, where sand, water, and residual solids are displaced and transferred to the sand separator tank. The gas then flows into a three-phase separator which separates produced water and condensate from the gas stream. The produced water and condensate are transferred to the storage tanks, where vapors are controlled by a combustor. Vapors from the sand separator tank will also be controlled by the combustor. Once the tanks are filled, the contents are loaded into trucks for transport using vapor-balanced loading. At the wellpad, heat is provided by line heaters and electricity is provided by thermoelectric generators.

A process flow diagram is included as Attachment D.

ATTACHMENT C

Description of Fugitive Emissions

G70-A FUGITIVE EMISSIONS SUMMARY SHEET

FUGITIVE EMISSIONS SUMMARY	All Regulated Pollutants - Chemical Name/CAS ¹	Maximum Potential Uncontrolled Emissions ²		Maximum Potential Controlled Emissions ³		Est. Method Used ⁴
		lb/hr	ton/yr	lb/hr	ton/yr	
Haul Road/Road Dust Emissions Paved Haul Roads	N/A	---	---	---	---	---
Unpaved Haul Roads	PM PM ₁₀ PM _{2.5}	9.59 2.44 0.24	42.01 10.71 1.07	9.59 2.44 0.24	42.01 10.71 1.07	O ^A
Loading/Unloading Operations	VOC HAP	1.59 0.04	6.94 0.16	0.53 0.01	2.33 0.05	O ^B
Equipment Leaks	VOC CO ₂ e HAP	Does not apply	26.49 1,323 0.72	Does not apply	26.49 1,323 0.72	O ^C
Blowdown Emissions	N/A	---	---	---	---	---
Other	N/A	---	---	---	---	---

^A AP-42, Section 13.2.2.

^B AP-42 Section 5.2.

^C Protocol for Equipment Leak Estimates (EPA-453/R-95-017), Table 2-1, Nov. 1995.

¹ List all regulated air pollutants. Speciate VOCs, including all HAPs. Follow chemical name with Chemical Abstracts Service (CAS) number. LIST Acids, CO, CS₂, VOCs, H₂S, Inorganics, Lead, Organics, O₃, NO, NO₂, SO₂, SO₃, all applicable Greenhouse Gases (including CO₂ and methane), etc. DO NOT LIST H₂, H₂O, N₂, O₂, and Noble Gases.

² Give rate with no control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

³ Give rate with proposed control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

⁴ Indicate method used to determine emission rate as follows: MB = material balance; ST = stack test (give date of test); EE = engineering estimate; M = modeling; O = other (specify).


LEAK SOURCE DATA SHEET

Source Category	Pollutant	Number of Source Components	Number of Components Monitored by Frequency	Average Time to Repair (days)	Estimated Annual Emission Rate (lb/yr) ¹
Pumps	light liquid VOC	1	TBD	TBD	384
	heavy liquid VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---
Valves	Gas VOC	543	TBD	TBD	12,521
	Light Liquid VOC	---	TBD	TBD	---
	Heavy Liquid VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---
Safety Relief Valves	Gas VOC	59	TBD	TBD	23,700
	Non VOC	---	TBD	TBD	---
Open-ended Lines	VOC	28	TBD	TBD	184
	Non-VOC	---	TBD	TBD	---
Sampling Connections	VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---
Compressors	VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---
Flanges	VOC	2,291	TBD	TBD	16,193
	Non-VOC	---	TBD	TBD	---
Other	VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---

¹ U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCMF factors were used as it was representative of natural gas liquids extraction

ATTACHMENT D

Process Flow Diagram

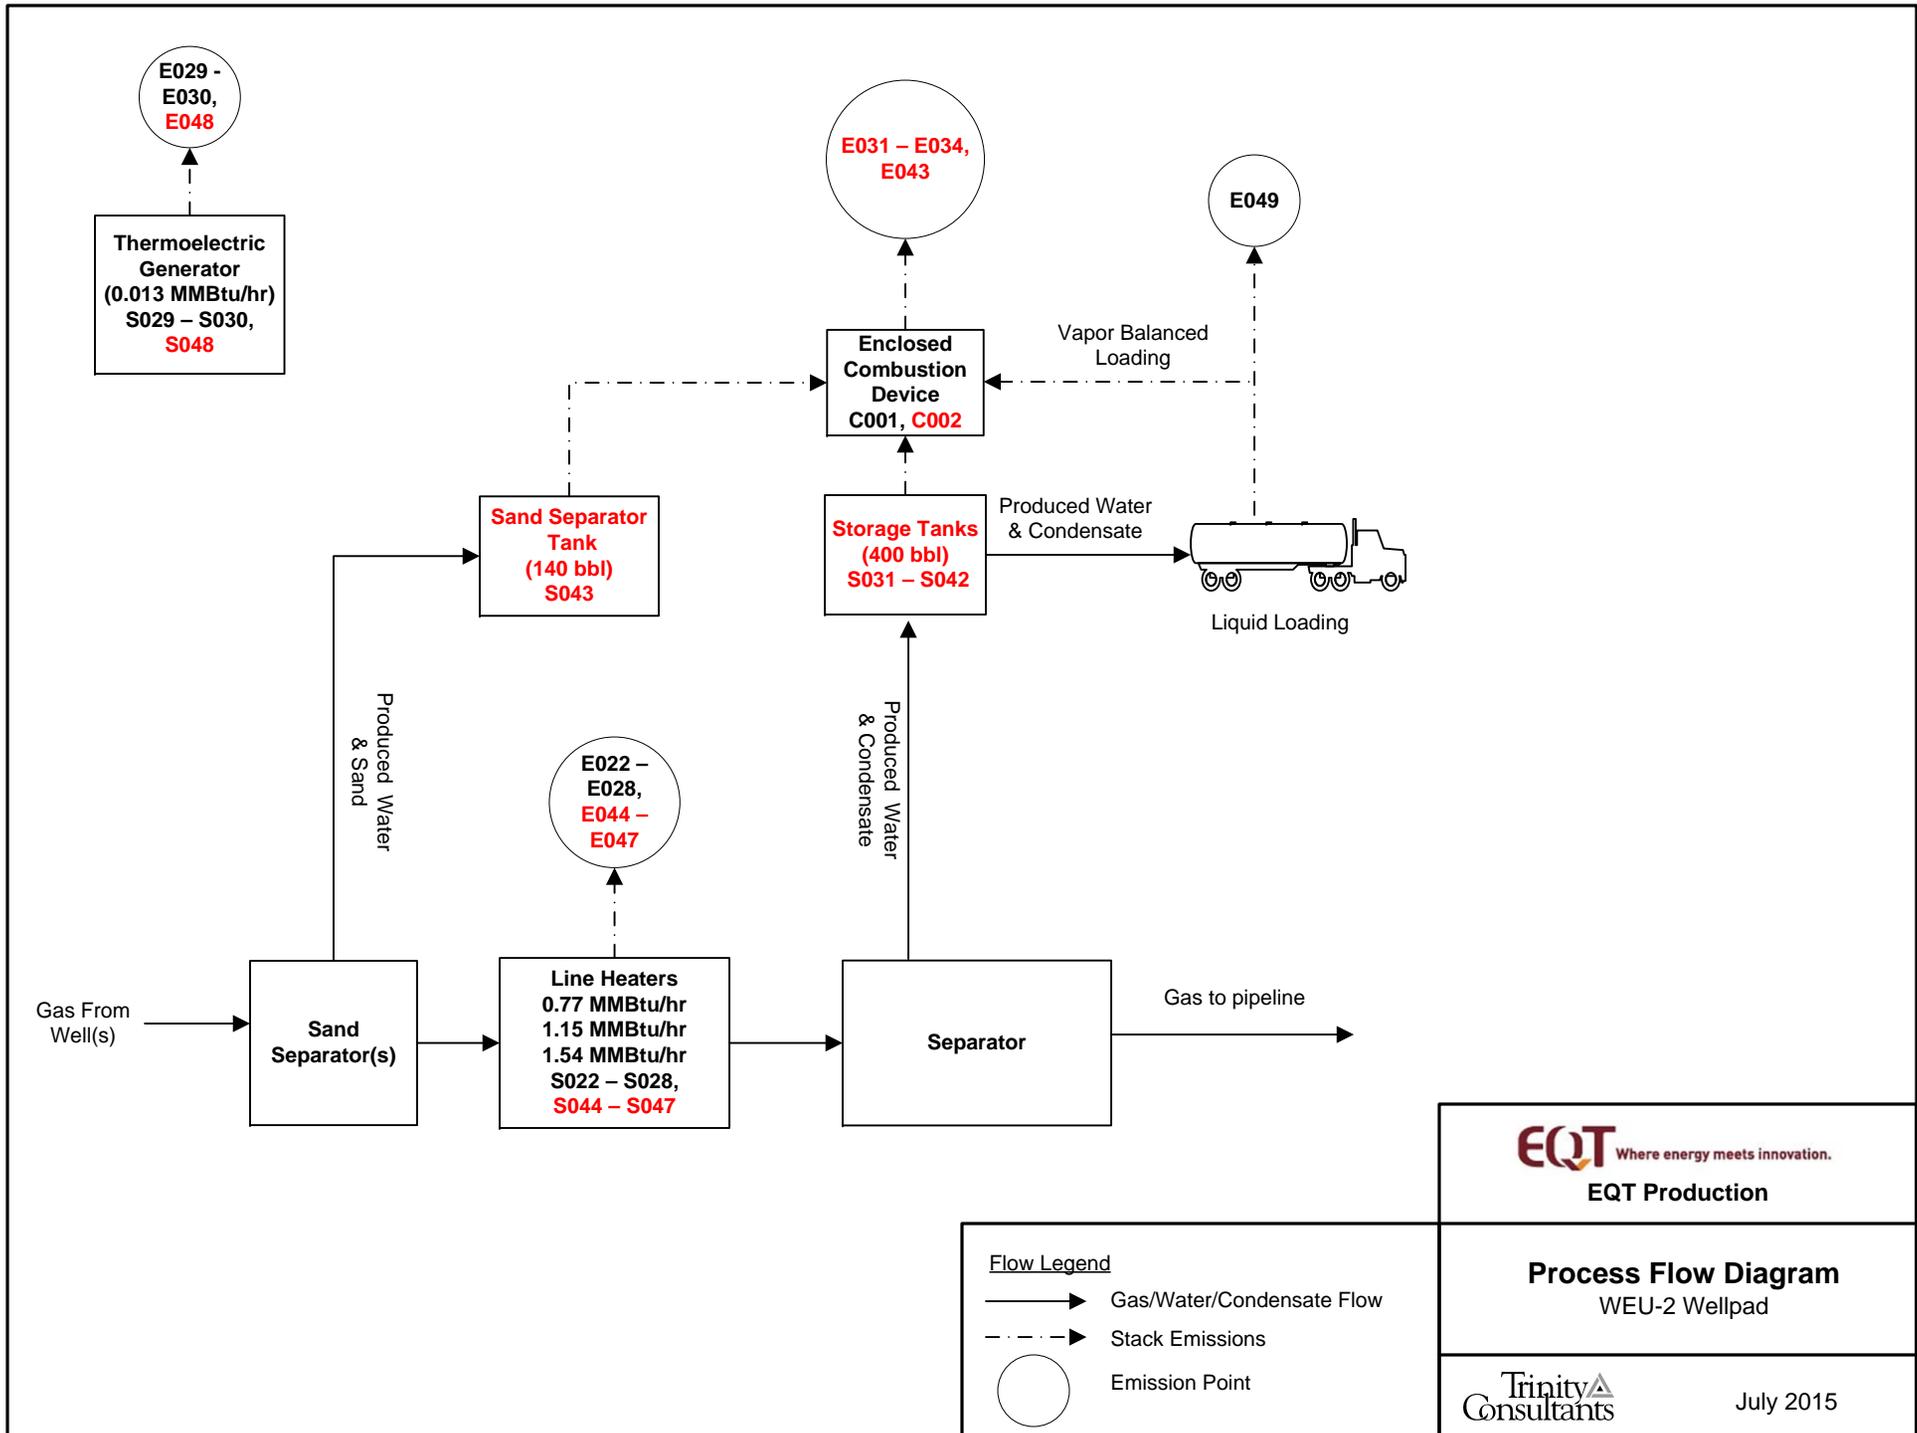

EQT Where energy meets innovation.
EQT Production

Process Flow Diagram
WEU-2 Wellpad

Flow Legend

- ▶ Gas/Water/Condensate Flow
- - -▶ Stack Emissions
- Emission Point

Trinity
Consultants


July 2015

ATTACHMENT E


Plot Plan

**NOTE: This diagram is not to scale.
Locations and distances between surface
equipment are not known at this time.**


Entrance to WEU-2 pad

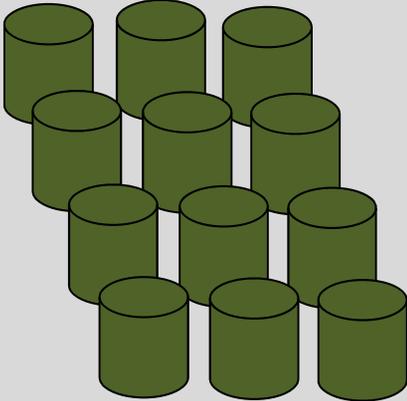


**Tanks
400 bbl
(12)**



**Sand Separator
Tank
140 bbl**


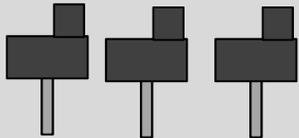


**Thermoelectric
Generators
(3)**

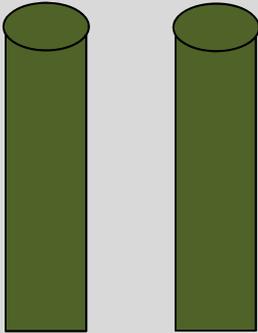

**Combustors
11.66
MMBTU/hr**

**Line Heaters
(11)**

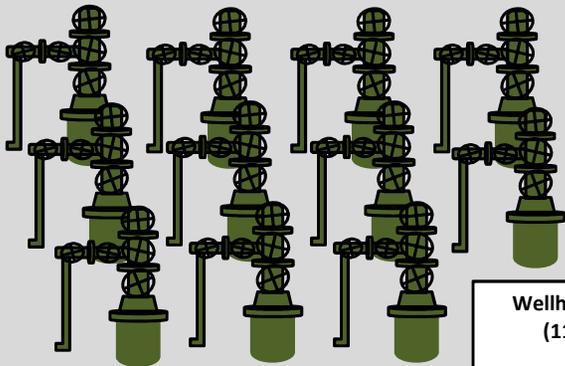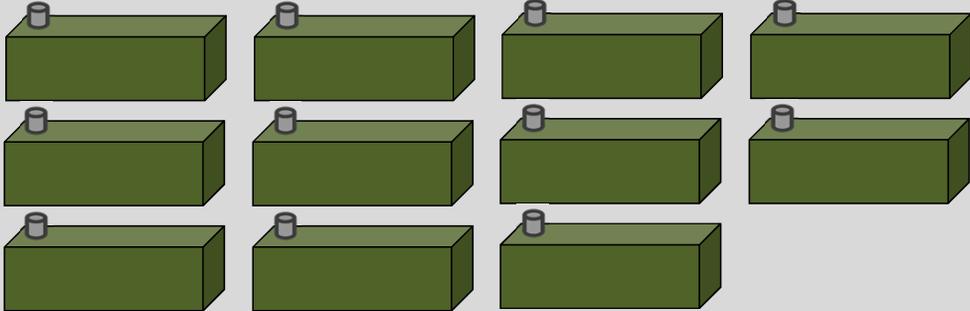

**Wellheads
(11)**

**Attachment E
WEU-2 Well Pad Plot Plan**

ATTACHMENT F

Area Map

ATTACHMENT F: AREA MAP

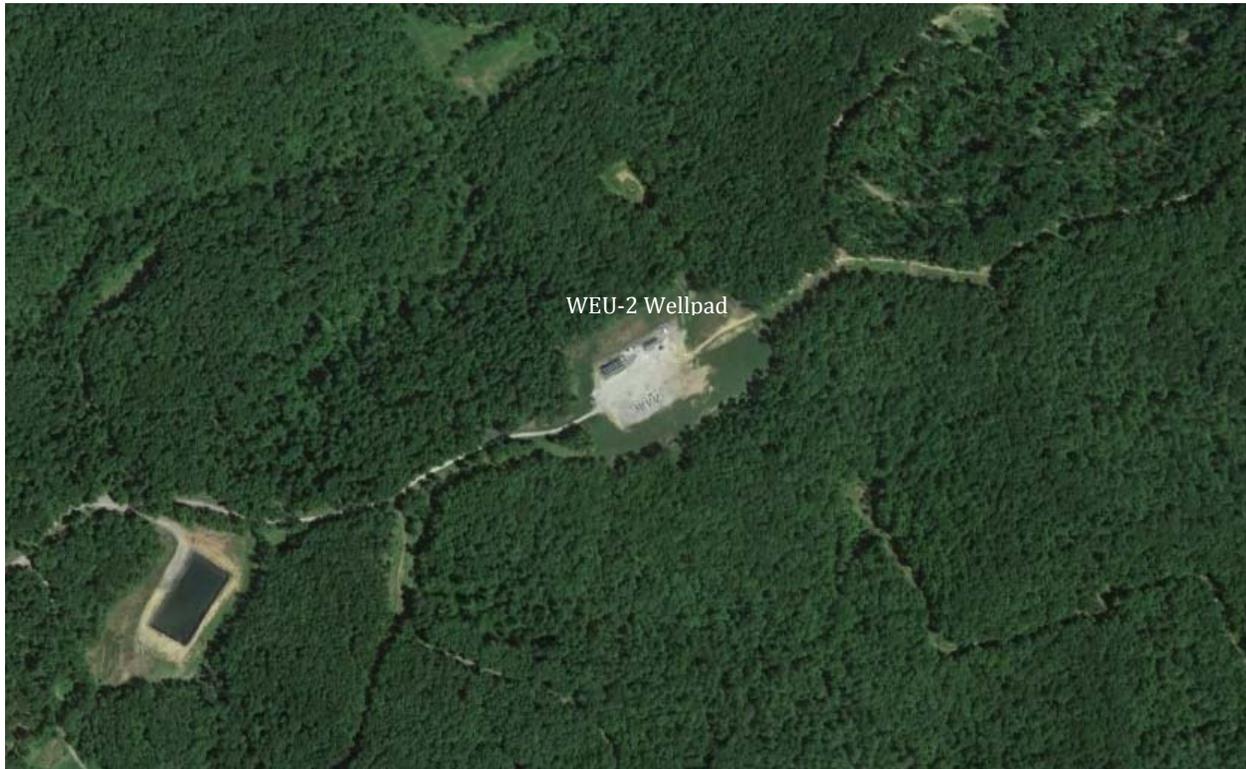


Figure 1 - Map of WEU-2 Location

UTM Northing (KM): 4,347.010
UTM Easting (KM): 519.710
Elevation: ~1,180 ft

ATTACHMENT G

Emission Unit Data Sheets and G70-A Section Applicability Form

**General Permit G70-A Registration
Section Applicability Form**

General Permit G70-A was developed to allow qualified applicants to seek registration for a variety of sources. These sources include natural gas well affected facilities, storage tanks, natural gas-fired compressor engines (RICE), natural gas producing units, natural gas-fired in-line heaters, pneumatic controllers, heater treaters, tank truck loading, glycol dehydration units, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-A allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

Section 5	Natural Gas Well Affected Facility	<input checked="" type="checkbox"/>
Section 6	Storage Vessels*	<input checked="" type="checkbox"/>
Section 7	Gas Producing Units, In-Line Heaters, Heater Treaters, and Glycol Dehydration Reboilers	<input checked="" type="checkbox"/>
Section 8	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO)	<input type="checkbox"/>
Section 9	<i>Reserved</i>	<input type="checkbox"/>
Section 10	Natural gas-fired Compressor Engine(s) (RICE) **	<input type="checkbox"/>
Section 11	Tank Truck Loading Facility ***	<input checked="" type="checkbox"/>
Section 12	Standards of Performance for Storage Vessel Affected Facilities (NSPS, Subpart OOOO)	<input type="checkbox"/>
Section 13	Standards of Performance for Stationary Spark Ignition Internal Combustion Engines (NSPS, Subpart JJJJ)	<input type="checkbox"/>
Section 14	Control Devices not subject to NSPS, Subpart OOOO	<input checked="" type="checkbox"/>
Section 15	National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines (40CFR63, Subpart ZZZZ)	<input type="checkbox"/>
Section 16	Glycol Dehydration Units	<input type="checkbox"/>
Section 17	Dehydration Units With Exemption from NESHAP Standard, Subpart HH § 63.764(d) (40CFR63, Subpart HH)	<input type="checkbox"/>
Section 18	Dehydration Units Subject to NESHAP Standard, Subpart HH and Not Located Within an UA/UC (40CFR63, Subpart HH)	<input type="checkbox"/>
Section 19	Dehydration Units Subject to NESHAP Standard, Subpart HH and Located Within an UA/UC (40CFR63, Subpart HH)	<input type="checkbox"/>

* Applicants that are subject to Section 6 may also be subject to Section 12 if the applicant is subject to the NSPS, Subpart OOOO control requirements or the applicable control device requirements of Section 14.

** Applicants that are subject to Section 10 may also be subject to the applicable RICE requirements of Section 13 and/or Section 15.

*** Applicants that are subject to Section 11 may also be subject to control device requirements of Section 14.

Emission Units Table (includes all emission units and air pollution control devices that will be part of this permit application review, regardless of permitting status)						
Emission Unit ID ¹	Emission Point ID ²	Emission Unit Description	Year Installed/ Modified	Design Capacity	Type ³ and Date of Change	Control Device ⁴
S001	E001	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S002	E002	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S003	E003	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S004	E004	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S005	E005	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S006	E006	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S007	E0007	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S008	E008	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S009	E009	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S010	E010	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S011	E011	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S012	E012	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S013	E013	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S014	E014	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S015	E015	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S016	E016	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S017	E017	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S018	E018	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S019	E019	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S020	E020	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002
S021	E021	Condensate Storage Tank	2011	210 bbl	Removed	C001/C002

G70-A Oil and Natural Gas Production Facilities
Instructions and Forms

S022	E022	Line Heater	2011	1.54 MMBtu/hr	Existing; No change	None
S023	E023	Line Heater	2011	1.15 MMBtu/hr	Existing; No change	None
S024	E024	Line Heater	2011	0.77 MMBtu/hr	Existing; No change	None
S025	E025	Line Heater	2011	0.77 MMBtu/hr	Existing; No change	None
S026	E026	Line Heater	2011	0.77 MMBtu/hr	Existing; No change	None
S027	E027	Line Heater	2011	0.77 MMBtu/hr	Existing; No change	None
S028	E028	Line Heater	2011	0.77 MMBtu/hr	Existing; No change	None
S029	E029	Thermoelectric Generator	2011	0.013 MMBtu/hr	Existing; No change	None
S030	E030	Thermoelectric Generator	2011	0.013 MMBtu/hr	Existing; No change	None
S031	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S032	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S033	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S034	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S035	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S036	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S037	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S038	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S039	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S040	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S041	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S042	C001/C002	Produced Fluid Storage Tank	TBD	400 bbl	New	C001/C002
S043	E043	Sand Separator Storage Tank	TBD	140 bbl	New	C001/C002
S044	E044	Line Heater	TBD	1.54 MMBtu/hr	New	None
S045	E045	Line Heater	TBD	1.54 MMBtu/hr	New	None
S046	E046	Line Heater	TBD	1.54 MMBtu/hr	New	None
S047	E047	Line Heater	TBD	1.54 MMBtu/hr	New	None
S048	E048	Thermoelectric Generator	TBD	0.013 MMBtu/hr	New	None
S049	C001/C002	Produced Fluid Truck Loading	2011	51,635,520 gal/yr	Modified – Increased throughput	C001/C002

G70-A Oil and Natural Gas Production Facilities
 Instructions and Forms

C001	C001	Combustor	2011	11.66 MMBtu/hr	Existing; No change	NA
C002	C002	Combustor	TBD	11.66 MMBtu/hr	New	NA
¹ For Emission Units (or Sources) use the following numbering system: 1S, 2S, 3S,... or other appropriate designation. ² For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation. ³ New, modification, removal ⁴ For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.						

NATURAL GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification, or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

Please provide the API number(s) for each NG well at this facility:	
47-017-05912	TBD
47-017-05913	TBD
47-017-05917	TBD
47-017-05914	TBD
47-017-05915	
47-017-05916	
47-017-05957	

Note: This is the same API well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).

Every oil and gas well permitted in West Virginia since 1929 has been issued an API (American Petroleum Institute) number. This API is used by agencies to identify and track oil and gas wells.

The API number has the following format: 047-001-00001

Where,

047 = State code. The state code for WV is 047.

001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).

00001 = Well number. Each well will have a unique well number.

STORAGE VESSEL EMISSION UNIT DATA SHEET

Provide the following information for each new or modified bulk liquid storage tank.

I. GENERAL INFORMATION (required)

1. Bulk Storage Area Name WEU-2 Wellpad	2. Tank Name Produced Fluid Storage Tanks
3. Emission Unit ID number S031 – S042 (new)	4. Emission Point ID number C001-C002
5. Date Installed or Modified (<i>for existing tanks</i>) TBD	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other
7A. Description of Tank Modification (<i>if applicable</i>) NA	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Provide any limitations on source operation affecting emissions. (production variation, etc.) None	

II. TANK INFORMATION (required)

8. Design Capacity (<i>specify barrels or gallons</i>). Use the internal cross-sectional area multiplied by internal height. <div style="text-align: center;">400 bbl</div>	
9A. Tank Internal Diameter (ft.) ~12	9B. Tank Internal Height (ft.) ~20
10A. Maximum Liquid Height (ft.) ~20	10B. Average Liquid Height (ft.) ~10
11A. Maximum Vapor Space Height (ft.) ~20	11B. Average Vapor Space Height (ft.) ~10
12. Nominal Capacity (<i>specify barrels or gallons</i>). This is also known as “working volume. 400 bbl	
13A. Maximum annual throughput (gal/yr) ~4,291,200 per tank	13B. Maximum daily throughput (gal/day) ~11,757 per tank
14. Number of tank turnovers per year ~256 per tank	15. Maximum tank fill rate (gal/min) TBD
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input checked="" type="checkbox"/> vertical <input type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input checked="" type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe) <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical <input type="checkbox"/> Underground <input type="checkbox"/> Other (describe)	

III. TANK CONSTRUCTION AND OPERATION INFORMATION (*check which one applies*)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 19 – 26 in section VII

G70-A Oil and Natural Gas Production Facilities
Instructions and Forms

25B. Primary Seal Type (<i>check one</i>): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? (<i>check one</i>) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
SITE INFORMATION:			
27. Provide the city and state on which the data in this section are based: Elkins, WV			
28. Daily Avg. Ambient Temperature (°F): 49.06		29. Annual Avg. Maximum Temperature (°F): 61.15	
30. Annual Avg. Minimum Temperature (°F): 39.97		31. Avg. Wind Speed (mph): 6.17	
32. Annual Avg. Solar Insulation Factor (BTU/ft ² -day): 1,193.87		33. Atmospheric Pressure (psia): 13.73	
LIQUID INFORMATION:			
34. Avg. daily temperature range of bulk liquid (°F): 51.30		34A. Minimum (°F):	
		34B. Maximum (°F):	
35. Avg. operating pressure range of tank (psig): -0.03 to 0.70		35A. Minimum (psig): -0.03	
		35B. Maximum (psig): 0.70	
36A. Minimum liquid surface temperature (°F): 46.54		36B. Corresponding vapor pressure (psia): 0.2314	
37A. Avg. liquid surface temperature (°F): 55.41		37B. Corresponding vapor pressure (psia): 0.2982	
38A. Maximum liquid surface temperature (°F): 64.27		38B. Corresponding vapor pressure (psia): 0.3821	
39. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
39A. Material name and composition:		Produced Fluid	
39B. CAS number:		TBD	
39C. Liquid density (lb/gal):		TBD	
39D. Liquid molecular weight (lb/lb-mole):		TBD	
39E. Vapor molecular weight (lb/lb-mole):		28.8657	
39F. Maximum true vapor pressure (psia):		TBD	
39G. Maxim Reid vapor pressure (psia):		TBD	
39H. Months Storage per year. From:		12 (All year)	
To:			

STORAGE VESSEL EMISSION UNIT DATA SHEET

Provide the following information for each new or modified bulk liquid storage tank.

I. GENERAL INFORMATION (required)

1. Bulk Storage Area Name WEU-2 Wellpad	2. Tank Name Sand Separator Tank
3. Emission Unit ID number S043	4. Emission Point ID number E043
5. Date Installed or Modified (<i>for existing tanks</i>) TBD	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other
7A. Description of Tank Modification (<i>if applicable</i>)	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Provide any limitations on source operation affecting emissions. (production variation, etc.) None	

II. TANK INFORMATION (required)

8. Design Capacity (<i>specify barrels or gallons</i>). Use the internal cross-sectional area multiplied by internal height. 140 bbl	
9A. Tank Internal Diameter (ft.) ~10	9B. Tank Internal Height (ft.) ~10
10A. Maximum Liquid Height (ft.) ~10	10B. Average Liquid Height (ft.) ~5
11A. Maximum Vapor Space Height (ft.) ~10	11B. Average Vapor Space Height (ft.) ~5
12. Nominal Capacity (<i>specify barrels or gallons</i>). This is also known as "working volume. 140 bbl	
13A. Maximum annual throughput (gal/yr) ~141,120	13B. Maximum daily throughput (gal/day) ~387
14. Number of tank turnovers per year ~24 per tank	15. Maximum tank fill rate (gal/min) TBD
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof ___ vertical <input checked="" type="checkbox"/> horizontal ___ flat roof ___ cone roof ___ dome roof ___ other (describe) <input type="checkbox"/> External Floating Roof ___ pontoon roof ___ double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof ___ vertical column support ___ self-supporting <input type="checkbox"/> Variable Vapor Space ___ lifter roof ___ diaphragm <input type="checkbox"/> Pressurized ___ spherical ___ cylindrical <input type="checkbox"/> Underground <input type="checkbox"/> Other (describe)	

III. TANK CONSTRUCTION AND OPERATION INFORMATION (*check which one applies*)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 19 – 26 in section VII

IV. SITE INFORMATION (*check which one applies*)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 27 – 33 in section VII

G70-A Oil and Natural Gas Production Facilities
Instructions and Forms

25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for Internal Floating Roof Tanks <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft ²):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
SITE INFORMATION:			
27. Provide the city and state on which the data in this section are based: Elkins, WV			
28. Daily Avg. Ambient Temperature (°F): 49.06		29. Annual Avg. Maximum Temperature (°F): 61.15	
30. Annual Avg. Minimum Temperature (°F): 39.97		31. Avg. Wind Speed (mph): 6.17	
32. Annual Avg. Solar Insulation Factor (BTU/ft ² -day): 1,193.87		33. Atmospheric Pressure (psia): 13.73	
LIQUID INFORMATION:			
34. Avg. daily temperature range of bulk liquid (°F): 51.30	34A. Minimum (°F):	34B. Maximum (°F):	
35. Avg. operating pressure range of tank (psig): -0.03 to 0.70	35A. Minimum (psig): -0.03	35B. Maximum (psig): 0.70	
36A. Minimum liquid surface temperature (°F): 46.54		36B. Corresponding vapor pressure (psia): 0.2314	
37A. Avg. liquid surface temperature (°F): 55.41		37B. Corresponding vapor pressure (psia): 0.2982	
38A. Maximum liquid surface temperature (°F): 64.27		38B. Corresponding vapor pressure (psia): 0.3821	
39. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
39A. Material name and composition:	Produced Fluid		
39B. CAS number:	TBD		
39C. Liquid density (lb/gal):	TBD		
39D. Liquid molecular weight (lb/lb-mole):	TBD		
39E. Vapor molecular weight (lb/lb-mole):	28.8657		
39F. Maximum true vapor pressure (psia):	TBD		
39G. Maxim Reid vapor pressure (psia):	TBD		
39H. Months Storage per year. From: To:	12 (All year)		

NATURAL GAS FIRED FUEL BURNING UNITS EMISSION DATA SHEET

Complete the information on this data for each Gas Producing Unit(s), Heater Treater(s), and in-line heater(s) at the production pad. Reboiler information should be entered on the Glycol Dehydration Emission Unit Data Sheet.

Emission Unit ID # ¹	Emission Point ID# ²	Emission Unit Description (Manufacturer / Model #)	Year Installed/ Modified	Type ³ and Date of Change	Control Device ⁴	Design Heat Input (mmBtu/hr) ⁵	Fuel Heating Value (Btu/scf) ⁶
S022	E022	Line Heater	2011	Existing; No change	None	1.54	~1,225
S023	E023	Line Heater	2011	Existing; No change	None	1.15	~1,225
S024	E024	Line Heater	2011	Existing; No change	None	0.77	~1,225
S025	E025	Line Heater	2011	Existing; No change	None	0.77	~1,225
S026	E026	Line Heater	2011	Existing; No change	None	0.77	~1,225
S027	E027	Line Heater	2011	Existing; No change	None	0.77	~1,225
S028	E028	Line Heater	2011	Existing; No change	None	0.77	~1,225
S029	E029	Thermoelectric Generator	2011	Existing; No change	None	0.013	~1,225
S030	E030	Thermoelectric Generator	2011	Existing; No change	None	0.013	~1,225
S044	E044	Line Heater	TBD	New	None	1.54	~1,225
S045	E045	Line Heater	TBD	New	None	1.54	~1,225
S046	E046	Line Heater	TBD	New	None	1.54	~1,225
S047	E047	Line Heater	TBD	New	None	1.54	~1,225
S048	E048	Thermoelectric Generator	TBD	New	None	0.013	~1,225

¹ Enter the appropriate Emission Unit (or Sources) identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the *Glycol Dehydration Unit Data Sheet*.

² Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

³ New, modification, removal

⁴ Complete appropriate air pollution control device sheet for any control device.

⁵ Enter design heat input capacity in mmBtu/hr.

⁶ Enter the fuel heating value in Btu/standard cubic foot.

TANK TRUCK LOADING EMISSION UNIT DATA SHEET

Furnish the following information for each new or modified bulk liquid transfer area or loading rack at the natural gas production pad. This form is to be used for bulk liquid transfer operations to tank trucks.

1. Emission Unit ID: S049		2. Emission Point ID: C001		3. Year Installed/ Modified: Installed 2011	
4. Emission Unit Description: Liquid Loading					
5. Loading Area Data:					
5A. Number of pumps: 1		5B. Number of liquids loaded:1		5C. Maximum number of tank trucks loading at one time:1	
6. Describe cleaning location, compounds and procedure for tank trucks:					
7. Are tank trucks pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If YES, describe:					
8. Projected Maximum Operating Schedule (for rack or transfer point as a whole):					
Maximum	Jan. - Mar.	Apr. - June	July - Sept.	Oct. - Dec.	
hours/day	As needed	As needed	As needed	As needed	
days/week	As needed	As needed	As needed	As needed	

9. Bulk Liquid Data <i>(add pages as necessary)</i> :					
Liquid Name		Produced Fluids			
Max. daily throughput (1000 gal/day)		Variable			
Max. annual throughput (gal/yr)		51,635,520			
Loading Method ¹		SP			
Max. Fill Rate (gal/min)					
Average Fill Time (min/loading)					
Max. Bulk Liquid Temperature (°F)		51.30			
True Vapor Pressure ²		0.3821			
Cargo Vessel Condition ³		Unknown			
Control Equipment or Method ⁴		VB			
Minimum collection efficiency (%)		70			
Minimum control efficiency (%)		95			
<i>* Continued on next page</i>					

Maximum Emission Rate	Loading (lb/hr)	VOC: 0.53 HAP: 0.01		
	Annual (ton/yr)	VOC: 2.33 HAP: 0.05		
Estimation Method ⁵		EPA		
Notes:				
¹ BF = Bottom Fill SP = Splash Fill SUB = Submerged Fill				
² At maximum bulk liquid temperature				
³ B = Ballasted Vessel, C = Cleaned, U = Uncleaned (dedicated service), O = other (describe)				
⁴ List as many as apply (complete and submit appropriate <i>Air Pollution Control Device Sheets as Attachment "H"</i>): CA = Carbon Adsorption VB = Dedicated Vapor Balance (closed system) ECD = Enclosed Combustion Device F = Flare TO = Thermal Oxidation or Incineration				
⁵ EPA = EPA Emission Factor as stated in AP-42 MB = Material Balance TM = Test Measurement based upon test data submittal O = other (describe)				

10. Proposed Monitoring, Recordkeeping, Reporting, and Testing	
Please propose monitoring, recordkeeping, and reporting in order to demonstrate compliance with the proposed operating parameters. Please propose testing in order to demonstrate compliance with the proposed emissions limits.	
MONITORING <i>Please list and describe the process parameters and ranges that are proposed to be monitored in order to demonstrate compliance with the operation of this process equipment operation/air pollution control device.</i> None	RECORDKEEPING <i>Please describe the proposed recordkeeping that will accompany the monitoring.</i> None
REPORTING <i>Please describe the proposed frequency of reporting of the recordkeeping.</i> None	TESTING <i>Please describe any proposed emissions testing for this process equipment/air pollution control device.</i> None
11. Describe all operating ranges and maintenance procedures required by Manufacturer to maintain warranty: N/A	

ATTACHMENT H

Air Pollution Control Device Data Sheets

AIR POLLUTION CONTROL DEVICE

Vapor Combustion Control Device Sheet

Complete this vapor combustion control device sheet for each enclosed combustion device, flare, thermal oxidizer, or completion combustion device that is located at the natural gas production pad for the purpose of thermally destructing waste gas to control emissions of regulated pollutants to the atmosphere.

IMPORTANT: READ THE INSTRUCTIONS ACCOMPANYING THIS FORM BEFORE COMPLETING.			
General Information			
1. Control Device ID#: C001		2. Installation Date: 2011 <input type="checkbox"/> New	
3. Maximum Rated Total Flow Capacity: ~130 scf/min ~188,380 scfd	4. Maximum Design Heat Input: 11.66 MMBtu/hr	5. Design Heat Content: ~1,225 BTU/scf	
Control Device Information			
6. Select the type of vapor combustion control device being used: <input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Elevated Flare <input type="checkbox"/> Ground Flare <input type="checkbox"/> Thermal Oxidizer <input type="checkbox"/> Completion Combustion Device			
7. Manufacturer: LEED Fabrication Model No.: Enclosed Combustor 48"		8. Hours of operation per year: 8760	
9. List the emission units whose emissions are controlled by this vapor combustion control device: (Emission Point ID#: <u>E031-E043, E049</u>)			
10. Emission Unit ID#	Emission Source Description:	Emission Unit ID#	Emission Source Description:
S031-S042	Produced Fluid Storage Tanks		
S043	Sand Separator Storage Tank		
S049	Produced Fluid Truck Loading		
<i>If this vapor combustor controls emissions from more than six emission units, please attach additional pages.</i>			
11. Assist Type		12. Flare Height	13. Tip Diameter
<input type="checkbox"/> Steam - <input type="checkbox"/> Air - <input type="checkbox"/> Pressure - <input checked="" type="checkbox"/> Non -		~25 ft	~4 ft
14. Was the design per §60.18? <input type="checkbox"/> Yes <input type="checkbox"/> No NA			
Waste Gas Information			
15. Maximum waste gas flow rate (scfm):	16. Heat value of waste gas stream (BTU/ft3)	17. Temperature of the emissions stream (°F)	18. Exit Velocity of the emissions stream (scf/min)
~130	Variable	~70	
19. Provide an attachment with the characteristics of the waste gas stream to be burned. <i>See attached emission calculations.</i>			

Pilot Information				
20. Type/Grade of pilot fuel:	21. Number of pilot lights:	22. Fuel flow rate to pilot flame per pilot (scf/hr):	23. Heat input per pilot (BTU/hr):	24. Will automatic re-ignition be used?
Pipeline quality natural gas	1	21	26,335	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
25. If automatic re-ignition will be used, describe the method: NA				
26. Describe the method of controlling flame: Three flame cells to stop the main flame front; One 2" flame arrestor on piping from drip pot to burner assembly.				
27. Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		28. If yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infra-Red <input type="checkbox"/> Ultra Violet <input type="checkbox"/> Camera with monitoring control room <input type="checkbox"/> Other, describe:		

29. Pollutant(s) Controlled	30. % Capture Efficiency	31. Manufacturer's Guaranteed Control Efficiency (%)
HC	100	≥ 95
VOC	100	≥ 95
HAP	100	≥ 95
32. Has the control device been tested by the manufacturer and certified?		
33. Describe all operating ranges and maintenance procedures required by the manufacturer to maintain warranty: See attached specification sheet.		
34. Additional Information Attached? <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO		
<i>Please attach a copy of manufacturer's data sheet.</i> <i>Please attach a copy of manufacturer's drawing.</i> <i>Please attach a copy of the manufacturer's performance testing.</i>		

If any of the requested information is not available, please contact the manufacturer.

AIR POLLUTION CONTROL DEVICE

Vapor Combustion Control Device Sheet

Complete this vapor combustion control device sheet for each enclosed combustion device, flare, thermal oxidizer, or completion combustion device that is located at the natural gas production pad for the purpose of thermally destructing waste gas to control emissions of regulated pollutants to the atmosphere.

IMPORTANT: READ THE INSTRUCTIONS ACCOMPANYING THIS FORM BEFORE COMPLETING.			
General Information			
1. Control Device ID#: C002		2. Installation Date: TBD <input checked="" type="checkbox"/> New	
3. Maximum Rated Total Flow Capacity: ~130 scf/min ~188,380 scfd	4. Maximum Design Heat Input: 11.66 MMBtu/hr	5. Design Heat Content: 1,225 BTU/scf	
Control Device Information			
6. Select the type of vapor combustion control device being used: <input checked="" type="checkbox"/> Enclosed Combustion Device <input type="checkbox"/> Elevated Flare <input type="checkbox"/> Ground Flare <input type="checkbox"/> Thermal Oxidizer <input type="checkbox"/> Completion Combustion Device			
7. Manufacturer: LEED Fabrication Model No.: Enclosed Combustor 48"		8. Hours of operation per year: 8760	
9. List the emission units whose emissions are controlled by this vapor combustion control device: (Emission Point ID#: E031-E043, E049)			
10. Emission Unit ID#	Emission Source Description:	Emission Unit ID#	Emission Source Description:
S031-S042	Produced Fluid Storage Tanks		
S043	Sand Separator Storage Tank		
S049	Produced Fluid Truck Loading		
<i>If this vapor combustor controls emissions from more than six emission units, please attach additional pages.</i>			
11. Assist Type		12. Flare Height	13. Tip Diameter
<input type="checkbox"/> Steam - <input type="checkbox"/> Air - <input type="checkbox"/> Pressure - <input checked="" type="checkbox"/> Non -		~25 ft	~4 ft
			14. Was the design per §60.18? <input type="checkbox"/> Yes <input type="checkbox"/> No NA
Waste Gas Information			
15. Maximum waste gas flow rate (scfm):	16. Heat value of waste gas stream (BTU/ft3)	17. Temperature of the emissions stream (°F)	18. Exit Velocity of the emissions stream (scf/min)
~130	Variable	~70	
19. Provide an attachment with the characteristics of the waste gas stream to be burned. <i>See attached emission calculations.</i>			

Pilot Information				
20. Type/Grade of pilot fuel:	21. Number of pilot lights:	22. Fuel flow rate to pilot flame per pilot (scf/hr):	23. Heat input per pilot (BTU/hr):	24. Will automatic re-ignition be used?
Pipeline quality natural gas	1	21	26,335	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
25. If automatic re-ignition will be used, describe the method: NA				
26. Describe the method of controlling flame: Three flame cells to stop the main flame front; One 2" flame arrestor on piping from drip pot to burner assembly.				
27. Is pilot flame equipped with a monitor to detect the presence of the flame? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		28. If yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infra-Red <input type="checkbox"/> Ultra Violet <input type="checkbox"/> Camera with monitoring control room <input type="checkbox"/> Other, describe:		

29. Pollutant(s) Controlled	30. % Capture Efficiency	31. Manufacturer's Guaranteed Control Efficiency (%)
HC	100	≥ 95
VOC	100	≥ 95
HAP	100	≥ 95
32. Has the control device been tested by the manufacturer and certified?		
33. Describe all operating ranges and maintenance procedures required by the manufacturer to maintain warranty: See attached specification sheet.		
34. Additional Information Attached? <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO		
<i>Please attach a copy of manufacturer's data sheet.</i> <i>Please attach a copy of manufacturer's drawing.</i> <i>Please attach a copy of the manufacturer's performance testing.</i>		

If any of the requested information is not available, please contact the manufacturer.

ATTACHMENT I

Emission Calculations

Company Name: EQT Production, LLC
 Facility Name: WEU-2 Wellpad
 Project Description: G-70A Permit Application

Site Wide Summary

Emission Source	Value	Units	Emission Unit ID(s)	Emission Point ID(s)	Control Device
Well(s)	11	per pad	---	---	---
Storage Tank(s) (400 bbl)	12	per pad	S031 - S042	C001 - C002	Combustor
Sand Separator Tank	1	per pad	S043	E043	Combustor
Line Heater(s) (0.77 MMBtu/hr)	5	per pad	S024 - S028	E024 - E028	None
Line Heater(s) (1.15 MMBtu/hr)	1	per pad	S023	E023	None
Line Heater(s) (1.54 MMBtu/hr)	5	per pad	S022, S044-S047	E022, E044 - E047	None
Thermoelectric Generator(s) (TEGs)	3	per pad	S029 - S030, S048	E029 - E030, E048	None
Dehydrator(s)	0	per pad	---	---	---
Reboiler(s)	0	per pad	---	---	---
Dehy Drip Tank	0	per pad	---	---	---
Tank Combustor(s) (in use)	2	per pad	C001 - C002	C001 - C002	---
Dehy Combustor(s)	0	per pad	---	---	---
Length of lease road	3,990	feet	---	---	---

Constituent	Produced Fluid Storage Tanks (400 bbl)	Sand Separator Tank	Line Heaters (0.77 MMBtu/hr)	Line Heaters (1.15 MMBtu/hr)	Line Heaters (1.54 MMBtu/hr)	TEGs	Fugitive Components	Liquid Loading	Haul Roads	Total Emissions
	Includes Two Combustors									
Criteria Pollutants										
NO _x	8.35	---	1.375	0.412	2.749	0.01	---	---	---	12.90
CO	7.02	---	1.155	0.346	2.309	0.01	---	---	---	10.84
PM Total	0.63	---	0.104	0.031	0.209	1.1E-03	---	---	42.01	42.99
PM ₁₀ Total	0.63	---	0.104	0.031	0.209	1.1E-03	---	---	10.71	11.69
PM _{2.5} Total	0.63	---	0.104	0.031	0.209	1.1E-03	---	---	1.07	2.05
SO ₂	0.05	---	0.008	0.002	0.016	8.3E-05	---	---	---	0.08
VOC	54.40	0.18	0.076	0.023	0.151	7.6E-04	26.49	2.33	---	83.64
Greenhouse Gases										
CO ₂	11977.28	---	1970.95	591.29	3941.91	19.92	0.34	---	---	18,502
CH ₄	61.16	0.20	0.04	0.01	0.07	3.8E-04	52.91	---	---	114.40
N ₂ O	0.02	---	0.00	0.00	0.01	3.8E-05	---	---	---	0.03
CO ₂ e	13,513.05	5.08	1,972.99	591.90	3,945.98	19.94	1,323.13	---	---	21,372
Hazardous Air Pollutants										
Methylnaphthalene (2-)	---	---	3.3E-07	9.9E-08	6.6E-07	3.3E-09	---	---	---	1.1E-06
Methylchloranthrene (3-)	---	---	2.5E-08	7.4E-09	4.9E-08	2.5E-10	---	---	---	8.2E-08
Dimethylbenz(a)anthracene (7,12-)	---	---	2.2E-07	6.6E-08	4.4E-07	2.2E-09	---	---	---	7.3E-07
Acenaphthene	---	---	2.5E-08	7.4E-09	4.9E-08	2.5E-10	---	---	---	8.2E-08
Acenaphthylene	---	---	2.5E-08	7.4E-09	4.9E-08	2.5E-10	---	---	---	8.2E-08
Anthracene	---	---	3.3E-08	9.9E-09	6.6E-08	3.3E-10	---	---	---	1.1E-07
Benz(a)anthracene	---	---	2.5E-08	7.4E-09	4.9E-08	2.5E-10	---	---	---	8.2E-08
Benzene	0.06	<0.001	2.9E-05	8.7E-06	5.8E-05	2.9E-07	1.3E-02	1.2E-03	---	7.4E-02
Benzo(a)pyrene	---	---	1.6E-08	4.9E-09	3.3E-08	1.7E-10	---	---	---	5.5E-08
Benzo(b)fluoranthene	---	---	2.5E-08	7.4E-09	4.9E-08	2.5E-10	---	---	---	8.2E-08
Benzo(g,h,i)perylene	---	---	1.6E-08	4.9E-09	3.3E-08	1.7E-10	---	---	---	5.5E-08
Benzo(k)fluoranthene	---	---	2.5E-08	7.4E-09	4.9E-08	2.5E-10	---	---	---	8.2E-08
Chrysene	---	---	2.5E-08	7.4E-09	4.9E-08	2.5E-10	---	---	---	8.2E-08
Dibenzo(a,h)anthracene	---	---	1.6E-08	4.9E-09	3.3E-08	1.7E-10	---	---	---	5.5E-08
Dichlorobenzene	---	---	1.6E-05	4.9E-06	3.3E-05	1.7E-07	---	---	---	5.5E-05
Fluoranthene	---	---	4.1E-08	1.2E-08	8.2E-08	4.2E-10	---	---	---	1.4E-07
Fluorene	---	---	3.8E-08	1.2E-08	7.7E-08	3.9E-10	---	---	---	1.3E-07
Formaldehyde	---	---	1.0E-03	3.1E-04	2.1E-03	1.0E-05	---	---	---	3.4E-03
Hexane, n-	1.91	6.0E-03	2.5E-02	7.4E-03	4.9E-02	2.5E-04	0.39	4.8E-02	---	2.4E+00
Indeno(1,2,3-cd)pyrene	---	---	2.5E-08	7.4E-09	4.9E-08	2.5E-10	---	---	---	8.2E-08
Naphthalene	---	---	8.4E-06	2.5E-06	1.7E-05	8.5E-08	---	---	---	2.8E-05
Phenanthrene	---	---	2.3E-07	7.0E-08	4.7E-07	2.4E-09	---	---	---	7.7E-07
Pyrene	---	---	6.9E-08	2.1E-08	1.4E-07	6.9E-10	---	---	---	2.3E-07
Toluene	0.11	<0.001	4.7E-05	1.4E-05	9.3E-05	4.7E-07	0.03	2.2E-03	---	1.4E-01
Arsenic	---	---	2.7E-06	8.2E-07	5.5E-06	2.8E-08	---	---	---	9.1E-06
Beryllium	---	---	1.6E-07	4.9E-08	3.3E-07	1.7E-09	---	---	---	5.5E-07
Cadmium	---	---	1.5E-05	4.5E-06	3.0E-05	1.5E-07	---	---	---	5.0E-05
Chromium	---	---	1.9E-05	5.8E-06	3.8E-05	1.9E-07	---	---	---	6.4E-05
Cobalt	---	---	1.2E-06	3.5E-07	2.3E-06	1.2E-08	---	---	---	3.8E-06
Manganese	---	---	5.2E-06	1.6E-06	1.0E-05	5.3E-08	---	---	---	1.7E-05
Mercury	---	---	3.6E-06	1.1E-06	7.1E-06	3.6E-08	---	---	---	1.2E-05
Nickel	---	---	2.9E-05	8.7E-06	5.8E-05	2.9E-07	---	---	---	9.6E-05
Selenium	---	---	3.3E-07	9.9E-08	6.6E-07	3.3E-09	---	---	---	1.1E-06
Ethylbenzene	<0.001	<0.001	---	---	---	---	<0.001	1.2E-04	---	1.2E-04
Trimethylpentane (2,2,4-)	<0.001	<0.001	---	---	---	---	0.27	1.0E-04	---	2.7E-01
Xylene	0.01	<0.001	---	---	---	---	1.4E-02	1.7E-03	---	2.8E-02
Total HAP	2.09	0.01	0.03	0.01	0.05	2.6E-04	0.72	0.05	---	2.96

Company Name: EQT Production, LLC
Facility Name: WEU-2 Wellpad
Project Description: G-70A Permit Application

Produced Fluid Storage Tanks

Throughput Parameter	Value	Units
Operational Hours	8,760	hrs/yr
Total Produced Fluid Throughput for E&P ¹	50	bbl/day (per tank)
Total Condensate Throughput	17,440	bbl/month
Total Produced Water Throughput	84,731	bbl/month

Description	Potential Throughput ² (gal/yr)
Produced Water and Condensate	51,494,400

¹ For the purposes of establishing PTE, produced water is conservatively assumed to contain 1% condensate. E&P Tank throughput is on a per-tank basis.
² Based on maximum historical produced water and condensate throughput for WEU-2 wellpad.

Storage Tanks (400 bbl, each) - Uncontrolled (Per tank)

Constituent	Total Emissions ¹	
	lb/hr	tpy
Methane	23.189	101.566
Ethane	12.400	54.310
Propane	6.545	28.665
Isobutane	1.906	8.350
n-Butane	4.638	20.315
Isopentane	2.225	9.744
n-Pentane	2.066	9.049
n-Hexane	0.727	3.186
Cyclohexane	<0.001	<0.001
Other Hexanes	1.081	4.736
Heptanes	1.013	4.436
Benzene	0.021	0.092
Toluene	0.039	0.171
Ethylbenzene	0.002	0.008
Xylenes	0.002	0.010
2,2,4-Trimethylpentane	0.002	0.007
C8+ Heavies	0.433	1.899
Total Emissions:	56.587	247.851
Total VOC Emissions:	20.700	90.668
Total HAP Emissions:	0.792	3.470

¹ E&P TANK v2.0 calculates working, breathing and flashing losses and reports the sum as one total.
² E&P TANK v2.0 emission calculations are based on 12/12/2014 condensate sample from WEU-6 wellpad.

Control Efficiency of Combustor	95%	Guaranteed efficiency for Leed Enclosed Combustor
Pilot Rating	0.03 MMBtu/hr	Max. pilot fuel usage for Leed Enclosed Combustor
Combustor Rating	11.66 MMBtu/hr	Max. input from Leed Enclosed Combustor Operations Manual

Company Name:
 Facility Name:
 Project Description:

EQT Production, LLC
WEU-2 Wellpad
G-70A Permit Application

Produced Fluid Storage Tanks

Storage Tanks (400 bbl. each) - Controlled (Per tank)

Constituent	Total Emissions	
	lb/hr	tpy
Methane	1.159	5.078
Ethane	0.620	2.716
Propane	0.327	1.433
Isobutane	0.095	0.418
n-Butane	0.232	1.016
Isopentane	0.111	0.487
n-Pentane	0.103	0.452
n-Hexane	0.036	0.159
Cyclohexane	<0.001	<0.001
Other Hexanes	0.054	0.237
Heptanes	0.051	0.222
Benzene	0.001	0.005
Toluene	0.002	0.009
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	0.001
2,2,4-Trimethylpentane	<0.001	<0.001
C8+ Heavies	0.022	0.095
Total Emissions:	2.829	12.393
Total VOC Emissions:	1.035	4.533
Total HAP Emissions:	0.040	0.174

Enclosed Combustor Emissions - (Per combustor) ¹

Pollutant ²	Emission Factor (lb/MMBtu)	Combustor Potential Emissions		Pilot Potential Emissions	
		(lb/hr)	(tpy)	(lb/hr)	(tpy)
NO _x	0.082	0.951	4.168	0.002	0.009
CO	0.069	0.799	3.501	0.002	0.008
PM/PM ₁₀	0.006	0.072	0.317	1.6E-04	0.001
SO ₂	4.9E-04	0.006	0.025	1.3E-05	5.65E-05
CO ₂ (Natural Gas Firing)	116.997	1364.189	5975.146	3.081	13.495
CH ₄ (Natural Gas Firing)	0.002	0.026	0.113	5.8E-05	2.54E-04
N ₂ O (Natural Gas Firing)	2.2E-04	0.003	0.011	5.8E-06	2.54E-05

¹ Emission factors from AP-42 Ch. 1.4 for natural gas combustion were used as they were determined to be most representative of the process. Ch. 5.3 (Natural Gas Processing) was consulted, however, factors contained there are appropriate for amine gas sweetening processes, which is not the case at this facility. Also, Ch. 13.5 (Industrial Flares) was consulted, but since the control device in this case is an enclosed combustor vs. an elevated flare, these factors were also determined to be inappropriate.

² GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name:

EQT Production, LLC

Facility Name:

WEU-2 Wellpad

Project Description:

G-70A Permit Application

Sand Separator Tank

Throughput Parameter	Value	Units
Tank Capacity	5,880	gallons
Operational Hours	8,760	hrs/yr
Total Produced Water and Sand Throughput	280	bbl/month
Percent Produced Water	50%	
Total Produced Water Throughput	140	bbl/month

¹ Conservatively assumes 2 turnovers/month of sand and produced water.

Description	Potential Throughput (gal/yr)
Produced Water and Sand	141,120

Sand Separator Tank (140 bbl) - Uncontrolled (Per tank)

Constituent	Total Emissions ¹	
	lb/hr	tpy
Methane	0.046	0.203
Ethane	0.025	0.109
Propane	0.013	0.057
Isobutane	0.004	0.017
n-Butane	0.009	0.041
Isopentane	0.004	0.019
n-Pentane	0.004	0.018
n-Hexane	0.001	0.006
Cyclohexane	<0.001	<0.001
Other Hexanes	0.002	0.009
Heptanes	0.002	0.009
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
2,2,4-Trimethylpentane	<0.001	<0.001
C8+ Heavies	0.001	0.004
Total Emissions:	0.113	0.495
Total VOC Emissions:	0.041	0.181
Total HAP Emissions:	0.002	0.010

¹ E&P TANK 2.0 calculates working, breathing and flashing losses and reports the sum as one total.

² E&P TANK v2.0 emission calculations are based on 12/12/2014 condensate sample from WEU-6 wellpad.

Control Efficiency of Combustor
Pilot Rating
Combustor Rating

95%
0.03 MMBtu/hr
11.66 MMBtu/hr

Guaranteed efficiency for Leed Enclosed Combustor
Max. pilot fuel usage for Leed Enclosed Combustor
Max. input from Leed Enclosed Combustor Operations Manual

Company Name:

EQT Production, LLC

Facility Name:

WEU-2 Wellpad

Project Description:

G-70A Permit Application

Sand Separator Tank

Sand Separator Tank (140 bbl) - Controlled (*Per tank*)

Constituent	Total Emissions	
	lb/hr	tpy
Methane	0.002	0.010
Ethane	0.001	0.005
Propane	0.001	0.003
Isobutane	<0.001	0.001
n-Butane	<0.001	0.002
Isopentane	<0.001	0.001
n-Pentane	<0.001	0.001
n-Hexane	<0.001	<0.001
Cyclohexane	<0.001	<0.001
Other Hexanes	<0.001	<0.001
Heptanes	<0.001	<0.001
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
2,2,4-Trimethylpentane	<0.001	<0.001
C8+ Heavies	<0.001	<0.001
Total Emissions:	0.006	0.025
Total VOC Emissions:	0.002	0.009
Total HAP Emissions:	0.000	0.001

¹ All vapors will be routed to the same combustor controlling the other storage tanks on this pad at 95% control efficiency.

Company Name: EQT Production, LLC
Facility Name: WEU-2 Wellpad
Project Description: G-70A Permit Application

Line Heaters

Parameter	Value	Units
Fuel Used	Natural Gas	
Higher Heating Value (HHV)	1,225	BTU/scf
Heat Input	0.77	MMBtu/hr (each)
Fuel Consumption	6.28E-04	MMscf/hr (each)
Potential Annual Hours of Operation	8,760	hr/yr

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	6.3E-02	2.7E-01
CO	84	5.3E-02	2.3E-01
SO ₂	0.6	3.8E-04	1.6E-03
PM Total	7.6	4.8E-03	2.1E-02
PM Condensable	5.7	3.6E-03	1.6E-02
PM ₁₀ (Filterable)	1.9	1.2E-03	5.2E-03
PM _{2.5} (Filterable)	1.9	1.2E-03	5.2E-03
VOC	5.5	3.5E-03	1.5E-02
Lead	5.0E-04	3.1E-07	1.4E-06
CO ₂ (Natural Gas Firing) ⁴	143,374	90	394
CH ₄ (Natural Gas Firing) ⁴	2.7	1.7E-03	7.4E-03
N ₂ O (Natural Gas Firing) ⁴	0.27	1.7E-04	7.4E-04

Company Name: EQT Production, LLC
Facility Name: WEU-2 Wellpad
Project Description: G-70A Permit Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
<u>HAPs:</u>			
Methylnaphthalene (2-)	2.4E-05	1.5E-08	6.6E-08
3-Methylchloranthrene	1.8E-06	1.1E-09	4.9E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.0E-08	4.4E-08
Acenaphthene	1.8E-06	1.1E-09	4.9E-09
Acenaphthylene	1.8E-06	1.1E-09	4.9E-09
Anthracene	2.4E-06	1.5E-09	6.6E-09
Benz(a)anthracene	1.8E-06	1.1E-09	4.9E-09
Benzene	2.1E-03	1.3E-06	5.8E-06
Benzo(a)pyrene	1.2E-06	7.5E-10	3.3E-09
Benzo(b)fluoranthene	1.8E-06	1.1E-09	4.9E-09
Benzo(g,h,i)perylene	1.2E-06	7.5E-10	3.3E-09
Benzo(k)fluoranthene	1.8E-06	1.1E-09	4.9E-09
Chrysene	1.8E-06	1.1E-09	4.9E-09
Dibenzo(a,h) anthracene	1.2E-06	7.5E-10	3.3E-09
Dichlorobenzene	1.2E-03	7.5E-07	3.3E-06
Fluoranthene	3.0E-06	1.9E-09	8.2E-09
Fluorene	2.8E-06	1.8E-09	7.7E-09
Formaldehyde	7.5E-02	4.7E-05	2.1E-04
Hexane	1.8E+00	1.1E-03	4.9E-03
Indo(1,2,3-cd)pyrene	1.8E-06	1.1E-09	4.9E-09
Naphthalene	6.1E-04	3.8E-07	1.7E-06
Phenanthrene	1.7E-05	1.1E-08	4.7E-08
Pyrene	5.0E-06	3.1E-09	1.4E-08
Toluene	3.4E-03	2.1E-06	9.3E-06
Arsenic	2.0E-04	1.3E-07	5.5E-07
Beryllium	1.2E-05	7.5E-09	3.3E-08
Cadmium	1.1E-03	6.9E-07	3.0E-06
Chromium	1.4E-03	8.8E-07	3.8E-06
Cobalt	8.4E-05	5.3E-08	2.3E-07
Manganese	3.8E-04	2.4E-07	1.0E-06
Mercury	2.6E-04	1.6E-07	7.1E-07
Nickel	2.1E-03	1.3E-06	5.8E-06
Selenium	2.4E-05	1.5E-08	6.6E-08
Total HAP		1.2E-03	5.2E-03

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, 1.4-3, & 1.4-4.

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU-2 Wellpad
Project Description: G-70A Permit Application

Line Heaters

Parameter	Value	Units
Fuel Used	Natural Gas	
Higher Heating Value (HHV)	1,225	BTU/scf
Heat Input	1.15	MMBtu/hr (each)
Fuel Consumption	9.42E-04	MMscf/hr (each)
Potential Annual Hours of Operation	8,760	hr/yr

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	9.4E-02	4.1E-01
CO	84	7.9E-02	3.5E-01
SO ₂	0.6	5.6E-04	2.5E-03
PM Total	7.6	7.2E-03	3.1E-02
PM Condensable	5.7	5.4E-03	2.4E-02
PM ₁₀ (Filterable)	1.9	1.8E-03	7.8E-03
PM _{2.5} (Filterable)	1.9	1.8E-03	7.8E-03
VOC	5.5	5.2E-03	2.3E-02
Lead	5.0E-04	4.7E-07	2.1E-06
CO ₂ (Natural Gas Firing) ⁴	143,374	135	591
CH ₄ (Natural Gas Firing) ⁴	2.7	2.5E-03	1.1E-02
N ₂ O (Natural Gas Firing) ⁴	0.27	2.5E-04	1.1E-03

Company Name:

EQT Production, LLC

Facility Name:

WEU-2 Wellpad

Project Description:

G-70A Permit Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
<u>HAPs:</u>			
Methylnaphthalene (2-)	2.4E-05	2.3E-08	9.9E-08
3-Methylchloranthrene	1.8E-06	1.7E-09	7.4E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.5E-08	6.6E-08
Acenaphthene	1.8E-06	1.7E-09	7.4E-09
Acenaphthylene	1.8E-06	1.7E-09	7.4E-09
Anthracene	2.4E-06	2.3E-09	9.9E-09
Benz(a)anthracene	1.8E-06	1.7E-09	7.4E-09
Benzene	2.1E-03	2.0E-06	8.7E-06
Benzo(a)pyrene	1.2E-06	1.1E-09	4.9E-09
Benzo(b)fluoranthene	1.8E-06	1.7E-09	7.4E-09
Benzo(g,h,i)perylene	1.2E-06	1.1E-09	4.9E-09
Benzo(k)fluoranthene	1.8E-06	1.7E-09	7.4E-09
Chrysene	1.8E-06	1.7E-09	7.4E-09
Dibenzo(a,h) anthracene	1.2E-06	1.1E-09	4.9E-09
Dichlorobenzene	1.2E-03	1.1E-06	4.9E-06
Fluoranthene	3.0E-06	2.8E-09	1.2E-08
Fluorene	2.8E-06	2.6E-09	1.2E-08
Formaldehyde	7.5E-02	7.1E-05	3.1E-04
Hexane	1.8E+00	1.7E-03	7.4E-03
Indo(1,2,3-cd)pyrene	1.8E-06	1.7E-09	7.4E-09
Naphthalene	6.1E-04	5.7E-07	2.5E-06
Phenanthrene	1.7E-05	1.6E-08	7.0E-08
Pyrene	5.0E-06	4.7E-09	2.1E-08
Toluene	3.4E-03	3.2E-06	1.4E-05
Arsenic	2.0E-04	1.9E-07	8.2E-07
Beryllium	1.2E-05	1.1E-08	4.9E-08
Cadmium	1.1E-03	1.0E-06	4.5E-06
Chromium	1.4E-03	1.3E-06	5.8E-06
Cobalt	8.4E-05	7.9E-08	3.5E-07
Manganese	3.8E-04	3.6E-07	1.6E-06
Mercury	2.6E-04	2.4E-07	1.1E-06
Nickel	2.1E-03	2.0E-06	8.7E-06
Selenium	2.4E-05	2.3E-08	9.9E-08
Total HAP		1.8E-03	7.8E-03

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, 1.4-3, & 1.4-4.

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU-2 Wellpad
Project Description: G-70A Permit Application

Line Heaters

Parameter	Value	Units
Fuel Used	Natural Gas	
Higher Heating Value (HHV)	1,225	BTU/scf
Heat Input	1.54	MMBtu/hr (each)
Fuel Consumption	1.26E-03	MMscf/hr (each)
Potential Annual Hours of Operation	8,760	hr/yr

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	1.3E-01	5.5E-01
CO	84	1.1E-01	4.6E-01
SO ₂	0.6	7.5E-04	3.3E-03
PM Total	7.6	9.5E-03	4.2E-02
PM Condensable	5.7	7.2E-03	3.1E-02
PM ₁₀ (Filterable)	1.9	2.4E-03	1.0E-02
PM _{2.5} (Filterable)	1.9	2.4E-03	1.0E-02
VOC	5.5	6.9E-03	3.0E-02
Lead	5.0E-04	6.3E-07	2.7E-06
CO ₂ (Natural Gas Firing) ⁴	143,374	180	788
CH ₄ (Natural Gas Firing) ⁴	2.7	3.4E-03	1.5E-02
N ₂ O (Natural Gas Firing) ⁴	0.27	3.4E-04	1.5E-03

Company Name:

EQT Production, LLC

Facility Name:

WEU-2 Wellpad

Project Description:

G-70A Permit Application

Line Heaters

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
<u>HAPs:</u>			
Methylnaphthalene (2-)	2.4E-05	3.0E-08	1.3E-07
3-Methylchloranthrene	1.8E-06	2.3E-09	9.9E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.0E-08	8.8E-08
Acenaphthene	1.8E-06	2.3E-09	9.9E-09
Acenaphthylene	1.8E-06	2.3E-09	9.9E-09
Anthracene	2.4E-06	3.0E-09	1.3E-08
Benz(a)anthracene	1.8E-06	2.3E-09	9.9E-09
Benzene	2.1E-03	2.6E-06	1.2E-05
Benzo(a)pyrene	1.2E-06	1.5E-09	6.6E-09
Benzo(b)fluoranthene	1.8E-06	2.3E-09	9.9E-09
Benzo(g,h,i)perylene	1.2E-06	1.5E-09	6.6E-09
Benzo(k)fluoranthene	1.8E-06	2.3E-09	9.9E-09
Chrysene	1.8E-06	2.3E-09	9.9E-09
Dibenzo(a,h) anthracene	1.2E-06	1.5E-09	6.6E-09
Dichlorobenzene	1.2E-03	1.5E-06	6.6E-06
Fluoranthene	3.0E-06	3.8E-09	1.6E-08
Fluorene	2.8E-06	3.5E-09	1.5E-08
Formaldehyde	7.5E-02	9.4E-05	4.1E-04
Hexane	1.8E+00	2.3E-03	9.9E-03
Indo(1,2,3-cd)pyrene	1.8E-06	2.3E-09	9.9E-09
Naphthalene	6.1E-04	7.7E-07	3.4E-06
Phenanthrene	1.7E-05	2.1E-08	9.3E-08
Pyrene	5.0E-06	6.3E-09	2.7E-08
Toluene	3.4E-03	4.3E-06	1.9E-05
Arsenic	2.0E-04	2.5E-07	1.1E-06
Beryllium	1.2E-05	1.5E-08	6.6E-08
Cadmium	1.1E-03	1.4E-06	6.0E-06
Chromium	1.4E-03	1.8E-06	7.7E-06
Cobalt	8.4E-05	1.1E-07	4.6E-07
Manganese	3.8E-04	4.8E-07	2.1E-06
Mercury	2.6E-04	3.3E-07	1.4E-06
Nickel	2.1E-03	2.6E-06	1.2E-05
Selenium	2.4E-05	3.0E-08	1.3E-07
Total HAP		2.4E-03	1.0E-02

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, 1.4-3, & 1.4-4.

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
Facility Name: WEU-2 Wellpad
Project Description: G-70A Permit Application

Thermoelectric Generators (TEGs)

Parameter	Value	Units
Manufacturer	Global Thermoelectric	
Fuel Used	Natural Gas	
Higher Heating Value (HHV)	1,225	BTU/scf
Heat Input	0.013	MMBtu/hr (each)
Fuel Consumption ¹	1.06E-05	MMscf/hr (each)
Potential Annual Hours of Operation	8,760	hr/yr

¹ Global Thermoelectric specification sheet states 311 ft³/day at 1000 BTU/ft³.

Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
NO _x	100	1.1E-03	4.6E-03
CO	84	8.9E-04	3.9E-03
SO ₂	0.6	6.3E-06	2.8E-05
PM Total	7.6	8.0E-05	3.5E-04
PM Condensable	5.7	6.0E-05	2.6E-04
PM ₁₀ (Filterable)	1.9	2.0E-05	8.8E-05
PM _{2.5} (Filterable)	1.9	2.0E-05	8.8E-05
VOC	5.5	5.8E-05	2.5E-04
Lead	5.00E-04	5.3E-09	2.3E-08
CO ₂ (Natural Gas Firing) ⁴	143,374	2	7
CH ₄ (Natural Gas Firing) ⁴	2.7	2.9E-05	1.3E-04
N ₂ O (Natural Gas Firing) ⁴	0.27	2.9E-06	1.3E-05

Company Name: EQT Production, LLC
Facility Name: WEU-2 Wellpad
Project Description: G-70A Permit Application

Thermoelectric Generators (TEGs)

Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) ¹	Potential Emissions	
		(lb/hr) ²	(tons/yr) ³
<u>HAPs:</u>			
Methylnaphthalene (2-)	2.4E-05	2.5E-10	1.1E-09
3-Methylchloranthrene	1.8E-06	1.9E-11	8.3E-11
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.7E-10	7.4E-10
Acenaphthene	1.8E-06	1.9E-11	8.3E-11
Acenaphthylene	1.8E-06	1.9E-11	8.3E-11
Anthracene	2.4E-06	2.5E-11	1.1E-10
Benz(a)anthracene	1.8E-06	1.9E-11	8.3E-11
Benzene	2.1E-03	2.2E-08	9.7E-08
Benzo(a)pyrene	1.2E-06	1.3E-11	5.6E-11
Benzo(b)fluoranthene	1.8E-06	1.9E-11	8.3E-11
Benzo(g,h,i)perylene	1.2E-06	1.3E-11	5.6E-11
Benzo(k)fluoranthene	1.8E-06	1.9E-11	8.3E-11
Chrysene	1.8E-06	1.9E-11	8.3E-11
Dibenzo(a,h) anthracene	1.2E-06	1.3E-11	5.6E-11
Dichlorobenzene	1.2E-03	1.3E-08	5.6E-08
Fluoranthene	3.0E-06	3.2E-11	1.4E-10
Fluorene	2.8E-06	3.0E-11	1.3E-10
Formaldehyde	7.5E-02	7.9E-07	3.5E-06
Hexane	1.8E+00	1.9E-05	8.3E-05
Indo(1,2,3-cd)pyrene	1.8E-06	1.9E-11	8.3E-11
Naphthalene	6.1E-04	6.5E-09	2.8E-08
Phenanthrene	1.7E-05	1.8E-10	7.9E-10
Pyrene	5.0E-06	5.3E-11	2.3E-10
Toluene	3.4E-03	3.6E-08	1.6E-07
Arsenic	2.0E-04	2.1E-09	9.3E-09
Beryllium	1.2E-05	1.3E-10	5.6E-10
Cadmium	1.1E-03	1.2E-08	5.1E-08
Chromium	1.4E-03	1.5E-08	6.5E-08
Cobalt	8.4E-05	8.9E-10	3.9E-09
Manganese	3.8E-04	4.0E-09	1.8E-08
Mercury	2.6E-04	2.7E-09	1.2E-08
Nickel	2.1E-03	2.2E-08	9.7E-08
Selenium	2.4E-05	2.5E-10	1.1E-09
Total HAP		2.0E-05	8.7E-05

¹ Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, 1.4-3, & 1.4-4.

² Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

³ Annual Emissions (tons/yr)_{Potential} = (lb/hr)_{Emissions} × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

⁴ GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name: EQT Production, LLC
 Facility Name: WEU-2 Wellpad
 Project Description: G-70A Permit Application

Fugitive Components

Component Counts

Facility Equipment Type ¹	Valves	Connectors	Open-Ended Lines	Pressure Relief Devices
Wellhead	8	38	0.5	0
Separators	1	6	0	0
Meters/Piping	12	45	0	0
Compressors	12	57	0	0
In-line heaters	14	65	2	1
Dehydrators	24	90	2	2

¹ Table W-1B to Subpart W of Part 98 — Default Average Component Counts for Major Onshore Natural Gas Production

Fugitive Emissions from Component Leaks

Equipment Type	Service	Emission Factors ¹ (kg/hr/source)	Facility Equipment Count ² (units)	TOC Total Fugitive Emissions (lb/hr)	TOC Annual Fugitive Emissions (tpy)
Valves	Gas	5.97E-03	543	7.15	31.30
Pump Seals	Light Liquid	1.99E-02	1	0.04	0.19
Pressure Relief Valves	Gas	1.04E-01	59	13.53	59.25
Connectors	All	1.83E-03	2,291	9.24	40.48
Open-Ended Lines	All	1.70E-03	28	0.10	0.46
Emission Totals:				30.07	131.69

¹ U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCMI factors were used as it was representative of natural gas liquids extraction.

² Assumes one pump for liquid loading, no compressors or dehydrators, and one meter per wellhead. Pressure relief valves count includes an Enardo valve and Emergency Pressure Relief valve for each storage tank.

VOC and HAP Weight Fractions ¹

Service	Weight Fraction VOC	Weight Fraction Hexane	Weight Fraction Benzene	Weight Fraction Toluene	Weight Fraction Ethylbenzene	Weight Fraction 2,2,4-trimethylpentane	Weight Fraction Xylene
Gas	0.200	3.0E-03	9.7E-05	2.1E-04	<0.001	2.1E-03	1.1E-04
Light Liquid	1.000	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
All	0.200	3.0E-03	9.7E-05	2.1E-04	<0.001	2.1E-03	1.1E-04

¹ All weight fractions are based on a representative gas analysis.

Company Name: EQT Production, LLC
 Facility Name: WEU-2 Wellpad
 Project Description: G-70A Permit Application

Liquid Loading

Liquid Loading Losses:

Uncontrolled Loading Losses: L_L (lb/10³ gal) = 12.46 (SPM)/T

Controlled Loading Losses: L_L (lb/10³ gal) = 12.46 (SPM)/T * (1 - collection efficiency * control efficiency)

Parameter	Value	Description
S	1.00	saturation factor for vapor balancing (AP-42 Table 5.2-1)
Collection Efficiency	70%	collection efficiency for non-NSPS/MACT annual leak tested trucks
Control Efficiency	95%	control efficiency of combustor
P	0.38	max true vapor pressure of liquid loaded (psia) - EPA TANKS Data
M	28.87	molecular weight of vapors (lb/lb-mol) - EPA TANKS Data
T	511.0	temperature of liquids loaded (deg R) - EPA TANKS Data

Description	Loading Losses (lb/10 ³ gal)	Maximum Throughput ¹ (gal)	VOC Emissions		
			Total Uncontrolled (tpy)	Uncontrolled Uncaptured (tpy)	Controlled ² Captured (tpy)
Liquids Hauling	0.3	51,635,520	6.94	2.08	0.24

¹ Sum of the annual throughput from each well at the pad including the sand separator tank.

² Represents all vapors captured during liquid loading operations that are routed to the combustor for control.

Speciated HAP Emission Potential:

Constituent	mol% ¹	True Vapor Pressure of Organic Compounds in liquid (psia) ²	Partial Vapor Pressure (psia)	Mole Fraction	Molecular Weight	VOC Vapor Weight	Speciated Weight Fraction	Controlled Speciated Liquid Loading Emissions (tpy) ³
Methane	0.095	---	---	---	---	---	---	---
Ethane	0.602	---	---	---	---	---	---	---
Propane	1.646	127.310	2.1E+00	3.2E-01	4.4E+01	1.4E+01	2.0E-01	4.8E-02
Isobutane	0.867	46.110	4.0E-01	6.1E-02	5.8E+01	3.6E+00	4.9E-02	1.2E-02
n-Butane	2.986	32.045	9.6E-01	1.5E-01	5.8E+01	8.5E+00	1.2E-01	2.9E-02
Isopentane	3.103	12.530	3.9E-01	5.9E-02	7.2E+01	4.3E+00	5.9E-02	1.4E-02
n-Pentane	3.943	8.433	3.3E-01	5.1E-02	7.2E+01	3.7E+00	5.1E-02	1.2E-02
n-Hexane	4.692	2.436	1.1E-01	1.7E-02	8.6E+01	1.5E+00	2.1E-02	5.0E-03
Other Hexanes	4.939	2.436	1.2E-01	1.8E-02	8.6E+01	1.6E+00	2.2E-02	5.3E-03
Heptanes	14.686	0.735	1.1E-01	1.7E-02	9.8E+01	1.6E+00	2.2E-02	5.4E-03
Benzene	0.200	1.508	3.0E-03	4.6E-04	7.8E+01	3.6E-02	5.0E-04	1.2E-04
Toluene	1.138	0.425	4.8E-03	7.4E-04	9.2E+01	6.8E-02	9.4E-04	2.3E-04
Ethylbenzene	0.155	0.151	2.3E-04	3.6E-05	1.1E+02	3.8E-03	5.3E-05	1.3E-05
Xylenes	1.763	0.180	3.2E-03	4.8E-04	1.1E+02	5.1E-02	7.1E-04	1.7E-04
2,2,4-Trimethylpentane	0.031	0.596	1.8E-04	2.8E-05	1.1E+02	3.2E-03	4.5E-05	1.1E-05
C8+ Heavies	59.154	3.400	2.0E+00	3.1E-01	1.1E+02	3.3E+01	4.6E-01	1.1E-01
	100.0		6.54			72.15	1.00	
Total Emissions:								0.24
Total HAP Emissions:								0.006

¹ An atmospheric analysis of a representative condensate sample (from wellpad OXF-131, Well #512441) is utilized to estimate the composition.

² Emission factors from AP-42 Section 7.1 "Liquid Storage Tanks" Tables 7.1-2, 7.1-3 and 7.1-5 (at 70 deg F or ~21 deg C) and Handbook of Chemistry and Physics: 84th Edition (at 295 K)

³ Speciated emissions (tpy) = Speciated Weight Fraction x Calculated Controlled Liquid Loading Emissions (tpy). As methane and ethane will flash off prior to loading, the emissions from these constituents are not included in the speciation.

Company Name: EQT Production, LLC
Facility Name: WEU-2 Wellpad
Project Description: G-70A Permit Application

Haul Roads

Estimated Potential Road Fugitive Emissions

Unpaved Road Emissions

Unpaved Roads: $E \text{ (lb/VMT)} = k(s/12)^a(W/3)^b \cdot [(365-p)/365]$

	PM	PM₁₀	PM_{2.5}	
k Factor (lb/VMT)	4.9	1.5	0.15	AP-42 Table 13.2.2-2 (Final, 11/06)
Silt content, s	4.8	%		AP-42 Table 13.2.2-1 (11/06), for Sand and Gravel Processing
Number of Rain Days, p	150			AP-42 Figure 13.2.1-2
a	0.7	0.9	0.9	AP-42 Table 13.2.2-2 (Final, 11/06)
b	0.45	0.45	0.45	AP-42 Table 13.2.2-2 (Final, 11/06)

Description	Weight of Empty Truck (tons)	Weight of Truck w/ Max Load (tons)	Mean Vehicle Weight (tons)	Length of Unpaved Road Traveled (mile/trip)	Trips Per Year	Mileage Per Year	Control (%)	Emissions (tpy)		
								PM	PM ₁₀	PM _{2.5}
Liquids Hauling	20	40	30	1.51	12,909	19,510	0	41.78	10.65	1.065
Employee Vehicles	3	3	3	1.51	200	302	0	0.23	0.06	0.006
Total Potential Emissions								42.01	10.71	1.07

Company Name: EOT Production, LLC
 Facility Name: WEU-2 Wellpad
 Project Description: G-70A Permit Application

Combustor Flow Rate Calculations

TANK GAS STREAM (FROM E&P TANK v2.0)					
Component	lb/hr	lb-mol/hr	mol%	MW lb/lb-mol	MW in Mixture
Carbon Dioxide	0.299	0.007	0.000	44.01	0.01
Nitrogen	<0.001	<0.001	<0.001	28.00	<0.001
Methane	278.314	17.351	0.653	16.04	10.47
Ethane	148.825	4.949	0.186	30.07	5.60
Propane	78.553	1.781	0.067	44.10	2.95
Isobutane	22.876	0.394	0.015	58.12	0.86
n-Butane	55.665	0.958	0.036	58.12	2.09
Isopentane	26.704	0.370	0.014	72.15	1.00
n-Pentane	24.796	0.344	0.013	72.15	0.93
n-Hexane	8.725	0.102	0.004	85.67	0.33
Cyclohexane	<0.001	<0.001	<0.001	84.16	<0.001
Other Hexanes	12.974	0.151	0.006	86.18	0.49
Heptanes	12.158	0.124	0.005	97.88	0.46
2,2,4-Trimethylpentane	0.252	0.002	0.000	114.23	0.01
Benzene	0.468	6.0E-03	2.3E-04	78.11	0.02
Toluene	0.024	0.000	9.8E-06	92.14	0.00
Ethylbenzene	0.024	0.000	0.000	106.17	0.00
Xylenes	0.024	2.3E-04	8.5E-06	106.17	0.00
C8 + Heavies	5.197	0.048	0.002	107.73	0.195
Total	675.88	26.59		25.42	lb/lbmole

1. Representative gas stream from the produced water storage tanks, sand separator tank, and dehy tank flowing to the combustor.

C001-C002

Combustor Rating	11.66 MMBtu/hr	Max. input from Leed Enclosed Combustor Operations Manual
Pilot Rating	0.03 MMBtu/hr	Max. pilot fuel usage for Leed Enclosed Combustor
Pilot Rating	26,335 btu/hr	
Pilot Fuel Usage	21 scf/hr	
Combustor Flow Capacity	188.38 MSCFD	Max. flowrate from LEED Combustor Operations Manual
	7,849 scf/hr	
	131 scf/min	

Enclosed Combustor Mass Flow Rate (C001)

$$\frac{7,849 \text{ scf}}{\text{hr}} * \frac{1 \text{ lbmole}}{379 \text{ scf}} * \frac{25.42 \text{ lb}}{\text{lbmole}} = \frac{526 \text{ lb}}{\text{hr}}$$

Mass flow rate (lb/hr) = $\frac{\text{Maximum Rated total flow capacity (scf/hr)} * \text{Vapor Molecular Weight (lb/lbmole)}}{\text{Molar Gas Volume (scf/lbmole)}}$

Company Name:
 Facility Name:
 Project Description:

EQT Production, LLC
WEU-2 Wellpad
G-70A Permit Application

Gas Analysis

Sample Location: Average of OXF-121 and OXF-136
 Sample Date: 5/30/2013
 HHV (Btu/scf): 1,225

Constituent	Natural Gas Stream Speciation (Mole %)	Molecular Weight	Molar Weight	Average Weight Fraction	Natural Gas Stream Speciation (Wt. %)
Carbon Dioxide	0.190	44.01	8.3E-02	4.1E-03	4.1E-01
Nitrogen	0.524	28.01	1.5E-01	7.3E-03	7.3E-01
Methane	80.257	16.04	1.3E+01	6.4E-01	6.4E+01
Ethane	12.984	30.07	3.9E+00	1.9E-01	1.9E+01
Propane	3.842	44.10	1.7E+00	8.4E-02	8.4E+00
Isobutane	0.490	58.12	2.8E-01	1.4E-02	1.4E+00
n-Butane	0.918	58.12	5.3E-01	2.6E-02	2.6E+00
Isopentane	0.243	72.15	1.8E-01	8.7E-03	8.7E-01
n-Pentane	0.217	72.15	1.6E-01	7.7E-03	7.7E-01
n-Hexane	0.070	86.18	6.0E-02	3.0E-03	3.0E-01
Cyclohexane	0.011	84.16	9.3E-03	4.6E-04	4.6E-02
Other Hexanes	0.114	86.18	9.8E-02	4.8E-03	4.8E-01
Heptanes	0.080	100.21	8.0E-02	4.0E-03	4.0E-01
2,2,4-Trimethylpentane	0.037	114.23	4.2E-02	2.1E-03	2.1E-01
Benzene*	0.003	78.11	2.0E-03	9.7E-05	9.7E-03
Toluene*	0.005	92.14	4.1E-03	2.1E-04	2.1E-02
Ethylbenzene*	<0.001	106.17	<0.001	<0.001	<0.001
Xylenes*	0.002	106.16	2.1E-03	1.1E-04	1.1E-02
C8 + Heavies	0.017	114.23	1.9E-02	9.6E-04	9.6E-02
Totals	100		20.17	1.00	100

TOC (Total)	99.29	98.86
VOC (Total)	6.05	15.67
HAP (Total)	0.12	0.55

* Project Setup Information

*

Project File : Z:\Client\EQT Corporation\West Virginia\WV Production Wells\153901.0056 WV Wellpads 2015\WEU 2\02 Draft\2015-0602 EQT_WEU-2 G-70 Application\Attach I - Emission Calcs\E&P Tank\2015-0602_EQT_WEU-2_G70_Produced Fluid 400 Tanks.ept
Flowsheet Selection : Oil Tank with Separator
Calculation Method : RVP Distillation
Control Efficiency : 95.0%
Known Separator Stream : Low Pressure Oil
Entering Air Composition : No

Filed Name : WEU-2 Wellpad - Produced Fluid 400 bbl Tanks
Well Name : PTE for G70 Application
Well ID : WEU-6 Condensate Sample 12/12/2014
Date : 2015.06.02

* Data Input

*

Separator Pressure : 470.00[psig]
Separator Temperature : 60.00[F]
Ambient Pressure : 14.70[psia]
Ambient Temperature : 55.00[F]
C10+ SG : 0.7740
C10+ MW : 152.78

-- Low Pressure Oil -----

Table with 3 columns: No., Component, mol %. Rows include H2S, O2, CO2, N2, C1-C9, C10+, Benzene, Toluene, E-Benzene, Xylenes, n-C6.

22 224Trimethylp 0.0230

-- Sales Oil -----

Production Rate : 50[bbl/day]
Days of Annual Operation : 365 [days/year]
API Gravity : 59.11
Reid Vapor Pressure : 10.60[psia]

* Calculation Results *

-- Emission Summary -----

Item	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
Page 1-----				E&P TANK
Total HAPs	3.470	0.792	0.174	0.040
Total HC	246.544	56.289	12.327	2.814
VOCs, C2+	144.977	33.100	7.249	1.655
VOCs, C3+	90.668	20.700	4.533	1.035

Uncontrolled Recovery Info.

Vapor 20.2100 [MSCFD]
HC Vapor 20.1400 [MSCFD]
GOR 404.20 [SCF/bbl]

-- Emission Composition -----

No	Component	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
1	H2S	0.000	0.000	0.000	0.000
2	O2	0.000	0.000	0.000	0.000
3	CO2	1.307	0.298	1.307	0.298
4	N2	0.000	0.000	0.000	0.000
5	C1	101.566	23.189	5.078	1.159
6	C2	54.310	12.400	2.716	0.620
7	C3	28.665	6.545	1.433	0.327
8	i-C4	8.350	1.906	0.418	0.095
9	n-C4	20.315	4.638	1.016	0.232
10	i-C5	9.744	2.225	0.487	0.111
11	n-C5	9.049	2.066	0.452	0.103
12	C6	4.736	1.081	0.237	0.054
13	C7	4.436	1.013	0.222	0.051
14	C8	1.574	0.359	0.079	0.018
15	C9	0.264	0.060	0.013	0.003
16	C10+	0.061	0.014	0.003	0.001
17	Benzene	0.092	0.021	0.005	0.001
18	Toluene	0.171	0.039	0.009	0.002
19	E-Benzene	0.008	0.002	0.000	0.000
20	Xylenes	0.010	0.002	0.001	0.000
21	n-C6	3.186	0.727	0.159	0.036
22	224Trimethylp	0.007	0.002	0.000	0.000
	Total	247.851	56.587	12.393	2.829

-- Stream Data -----

No. Component	MW	LP Oil	Flash Oil	Sale Oil	Flash Gas	W&S Gas	Total Emissions
	mol %	mol %	mol %	mol %	mol %	mol %	
1 H2S	34.80	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
2 O2	32.00	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
3 CO2	44.01	0.0960	0.0066	0.0051	0.3051	0.3328	0.3053
4 N2	28.01	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
5 C1	16.04	19.8690	0.4389	0.2348	65.3006	41.4140	65.0693
6 C2	30.07	6.1830	0.9135	0.8052	18.5042	24.6182	18.5634
7 C3	44.10	2.9670	1.3987	1.3537	6.6339	11.5103	6.6811
8 i-C4	58.12	1.0610	0.8894	0.8805	1.4623	2.9291	1.4765
9 n-C4	58.12	3.3570	3.2729	3.2548	3.5536	7.5461	3.5923
10 i-C5	72.15	2.9790	3.6673	3.6701	1.3695	3.2894	1.3881
11 n-C5	72.15	3.7960	4.8763	4.8850	1.2701	3.2290	1.2891
12 C6	86.16	5.0820	7.0121	7.0378	0.5690	1.6493	0.5795
13 C7	100.20	13.9880	19.7739	19.8599	0.4595	1.5537	0.4700
14 C8	114.23	15.8650	22.5895	22.6931	0.1417	0.5627	0.1457
15 C9	128.28	8.0210	11.4423	11.4956	0.0213	0.0989	0.0221
16 C10+	152.78	10.7890	15.4015	15.4738	0.0039	0.0231	0.0041
17 Benzene	78.11	0.1520	0.2119	0.2128	0.0118	0.0356	0.0121
18 Toluene	92.13	0.9950	1.4126	1.4189	0.0187	0.0667	0.0191
19 E-Benzene	106.17	0.1330	0.1896	0.1905	0.0007	0.0030	0.0007
20 Xylenes	106.17	0.2140	0.3051	0.3065	0.0010	0.0041	0.0010
21 n-C6	86.18	4.4300	6.1653	6.1893	0.3726	1.1321	0.3799
22 224Trimethylp	114.24	0.0230	0.0326	0.0327	0.0006	0.0020	0.0006

MW	80.92	104.67	105.01	25.38	34.81	25.47
Stream Mole Ratio	1.0000	0.7004	0.6972	0.2996	0.0029	0.3025
Heating Value [BTU/SCF]				1503.68	2005.07	1508.53
Gas Gravity [Gas/Air]				0.88	1.20	0.88
Bubble Pt. @ 100F [psia]	692.52	25.67	19.05			

Page 2----- E&P TANK

RVP @ 100F [psia]	153.75	12.00	10.69
Spec. Gravity @ 100F	0.636	0.678	0.678

* Project Setup Information *

Project File : C:\Users\lruckl\Desktop\EQT Wellpad Permit\Attach I - Emission Calcs\E&P Tank\2015-0513_EQT_WEU-2_G70_Sand Separator Tank.ept
Flowsheet Selection : Oil Tank with Separator
Calculation Method : RVP Distillation
Control Efficiency : 95.0%
Known Separator Stream : Low Pressure Oil
Entering Air Composition : No

Filed Name : WEU-2 Wellpad - Sand Separator Tank
Well Name : PTE for G70 Application
Well ID : WEU-6 Condensate Sample 12/12/2014
Date : 2015.05.13

* Data Input *

Separator Pressure : 470.00[psig]
Separator Temperature : 60.00[F]
Ambient Pressure : 14.70[psia]
Ambient Temperature : 55.00[F]
C10+ SG : 0.7740
C10+ MW : 152.78

-- Low Pressure Oil -----

Table with 3 columns: No., Component, mol %. Rows include H2S, O2, CO2, N2, C1-C9, C10+, Benzene, Toluene, E-Benzene, Xylenes, n-C6, and 224Trimethylp.

-- Sales Oil -----
 Production Rate : 0.1[bbbl/day]
 Days of Annual Operation : 365 [days/year]
 API Gravity : 59.11
 Reid Vapor Pressure : 10.60[psia]

 * Calculation Results *

-- Emission Summary -----

Item	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
Page 1-----				E&P TANK
Total HAPs	0.010	0.002	0.001	0.000
Total HC	0.493	0.113	0.025	0.006
VOCs, C2+	0.290	0.066	0.014	0.003
VOCs, C3+	0.181	0.041	0.009	0.002

Uncontrolled Recovery Info.

Vapor 40.4100 x1E-3 [MSCFD]
 HC Vapor 40.2900 x1E-3 [MSCFD]
 GOR 404.10 [SCF/bbl]

-- Emission Composition -----

No	Component	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
1	H2S	0.000	0.000	0.000	0.000
2	O2	0.000	0.000	0.000	0.000
3	CO2	0.003	0.001	0.003	0.001
4	N2	0.000	0.000	0.000	0.000
5	C1	0.203	0.046	0.010	0.002
6	C2	0.109	0.025	0.005	0.001
7	C3	0.057	0.013	0.003	0.001
8	i-C4	0.017	0.004	0.001	0.000
9	n-C4	0.041	0.009	0.002	0.000
10	i-C5	0.019	0.004	0.001	0.000
11	n-C5	0.018	0.004	0.001	0.000
12	C6	0.009	0.002	0.000	0.000
13	C7	0.009	0.002	0.000	0.000
14	C8	0.003	0.001	0.000	0.000
15	C9	0.001	0.000	0.000	0.000
16	C10+	0.000	0.000	0.000	0.000
17	Benzene	0.000	0.000	0.000	0.000
18	Toluene	0.000	0.000	0.000	0.000
19	E-Benzene	0.000	0.000	0.000	0.000
20	Xylenes	0.000	0.000	0.000	0.000
21	n-C6	0.006	0.001	0.000	0.000
22	224Trimethylp	0.000	0.000	0.000	0.000
	Total	0.495	0.113	0.025	0.006

-- Stream Data -----

No. Component	MW	LP Oil	Flash Oil	Sale Oil	Flash Gas	W&S Gas	Total Emissions
	mol %	mol %	mol %	mol %	mol %	mol %	
1 H2S	34.80	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
2 O2	32.00	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
3 CO2	44.01	0.0960	0.0066	0.0051	0.3051	0.3328	0.3053
4 N2	28.01	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
5 C1	16.04	19.8690	0.4389	0.2348	65.3006	41.4140	65.0693
6 C2	30.07	6.1830	0.9135	0.8052	18.5042	24.6182	18.5634
7 C3	44.10	2.9670	1.3987	1.3537	6.6339	11.5103	6.6811
8 i-C4	58.12	1.0610	0.8894	0.8805	1.4623	2.9291	1.4765
9 n-C4	58.12	3.3570	3.2729	3.2548	3.5536	7.5461	3.5923
10 i-C5	72.15	2.9790	3.6673	3.6701	1.3695	3.2894	1.3881
11 n-C5	72.15	3.7960	4.8763	4.8850	1.2701	3.2290	1.2891
12 C6	86.16	5.0820	7.0121	7.0378	0.5690	1.6493	0.5795
13 C7	100.20	13.9880	19.7739	19.8599	0.4595	1.5537	0.4700
14 C8	114.23	15.8650	22.5895	22.6931	0.1417	0.5627	0.1457
15 C9	128.28	8.0210	11.4423	11.4956	0.0213	0.0989	0.0221
16 C10+	152.78	10.7890	15.4015	15.4738	0.0039	0.0231	0.0041
17 Benzene	78.11	0.1520	0.2119	0.2128	0.0118	0.0356	0.0121
18 Toluene	92.13	0.9950	1.4126	1.4189	0.0187	0.0667	0.0191
19 E-Benzene	106.17	0.1330	0.1896	0.1905	0.0007	0.0030	0.0007
20 Xylenes	106.17	0.2140	0.3051	0.3065	0.0010	0.0041	0.0010
21 n-C6	86.18	4.4300	6.1653	6.1893	0.3726	1.1321	0.3799
22 224Trimethylp	114.24	0.0230	0.0326	0.0327	0.0006	0.0020	0.0006

MW	80.92	104.67	105.01	25.38	34.81	25.47	
Stream Mole Ratio	1.0000	0.7004	0.6972	0.2996	0.0029	0.3025	
Heating Value [BTU/SCF]				1503.68	2005.07	1508.53	
Gas Gravity [Gas/Air]				0.88	1.20	0.88	
Bubble Pt. @ 100F [psia]	692.52	25.67	19.05				

Page 2----- E&P TANK

RVP @ 100F [psia]	153.75	12.00	10.69				
Spec. Gravity @ 100F	0.636	0.678	0.678				

TANKS 4.0.9d
Emissions Report - Detail Format
Tank Identification and Physical Characteristics

Identification

User Identification: WEU-2 Liquid Loading
City:
State: West Virginia
Company: EQT Production
Type of Tank: Vertical Fixed Roof Tank
Description: Liquid Loading Calculations

Tank Dimensions

Shell Height (ft): 20.00
Diameter (ft): 12.00
Liquid Height (ft) : 20.00
Avg. Liquid Height (ft): 10.00
Volume (gallons): 16,800.00
Turnovers: 3,073.54
Net Throughput(gal/yr): 51,635,520.00
Is Tank Heated (y/n): N

Paint Characteristics

Shell Color/Shade: Gray/Light
Shell Condition: Good
Roof Color/Shade: Gray/Light
Roof Condition: Good

Roof Characteristics

Type: Cone
Height (ft): 0.00
Slope (ft/ft) (Cone Roof): 0.06

Breather Vent Settings

Vacuum Settings (psig): -0.30
Pressure Settings (psig): 0.70

Meteorological Data used in Emissions Calculations: Elkins, West Virginia (Avg Atmospheric Pressure = 13.73 psia)

TANKS 4.0.9d
Emissions Report - Detail Format
Liquid Contents of Storage Tank

WEU-2 Liquid Loading - Vertical Fixed Roof Tank

Mixture/Component	Month	Daily Liquid Surf. Temperature (deg F)			Liquid Bulk Temp (deg F)	Vapor Pressure (psia)			Vapor Mol. Weight	Liquid Mass Fract.	Vapor Mass Fract.	Mol. Weight	Basis for Vapor Pressure Calculations
		Avg.	Min.	Max.		Avg.	Min.	Max.					
Produced Fluids	All	55.41	46.54	64.27	51.30	0.2982	0.2314	0.3821	28.8657	0.0000	0.0000	21.04	
2,2,4-Trimethylpentane						0.5211	0.3991	0.6729	114.2300	0.0000	0.0000	114.23	Option 2: A=6.8118, B=1257.84, C=220.74
Benzene						1.0267	0.7943	1.3132	78.1100	0.0002	0.0006	78.11	Option 2: A=6.905, B=1211.033, C=220.79
Butane (-n)						0.4614	0.3889	0.5438	58.1200	0.0033	0.0037	58.12	Option 2: A=5.09536, B=935.86, C=238.73
Decane (-n)						0.0301	0.0245	0.0369	142.2900	0.0747	0.0055	142.29	Option 1: VP50 = .026411 VP60 = .033211
Ethylbenzene						0.0923	0.0669	0.1257	106.1700	0.0001	0.0000	106.17	Option 2: A=6.975, B=1424.255, C=213.21
Heptane (-n)						0.5323	0.4043	0.6943	100.2000	0.0209	0.0272	100.20	Option 3: A=37358, B=8.2585
Hexane (-n)						1.6957	1.3330	2.1360	86.1700	0.0120	0.0497	86.17	Option 2: A=6.876, B=1171.17, C=224.41
Isopentane						9.0329	7.1932	11.0836	72.1500	0.0033	0.0720	72.15	Option 1: VP50 = 7.889 VP60 = 10.005
methane						100.7917	87.8791	115.0985	44.0956	0.0000	0.0049	44.10	Option 2: A=7.3408624923, B=1104.2267744, C=291.70993941
Nonane (-n)						0.0588	0.0475	0.0729	128.2600	0.0235	0.0034	128.26	Option 1: VP50 = .051285 VP60 = .065278
Octane (-n)						0.1303	0.1035	0.1637	114.2300	0.0228	0.0072	114.23	Option 1: VP50 = .112388 VP60 = .145444
Pentane (-n)						6.1673	5.0301	7.5097	72.1500	0.0041	0.0624	72.15	Option 3: A=27691, B=7.558
Propane (-n)						100.7917	87.8791	115.0985	44.0956	0.0013	0.3252	44.10	Option 2: A=7.340862493, B=1104.2267744, C=291.70993941
Toluene						0.2857	0.2141	0.3766	92.1300	0.0017	0.0012	92.13	Option 2: A=6.954, B=1344.8, C=219.48
Water						0.2153	0.1602	0.2863	18.0150	0.8293	0.4365	18.02	Option 1: VP50 = .178 VP60 = .247
Xylene (-o)						0.0601	0.0431	0.0827	106.1700	0.0027	0.0004	106.17	Option 2: A=6.998, B=1474.679, C=213.69

TANKS 4.0.9d
Emissions Report - Detail Format
Detail Calculations (AP-42)

WEU-2 Liquid Loading - Vertical Fixed Roof Tank

Annual Emission Calculations

Standing Losses (lb):	3.1570
Vapor Space Volume (cu ft):	1,145.1105
Vapor Density (lb/cu ft):	0.0016
Vapor Space Expansion Factor:	0.0056
Vented Vapor Saturation Factor:	0.8621
Tank Vapor Space Volume:	
Vapor Space Volume (cu ft):	1,145.1105
Tank Diameter (ft):	12.0000
Vapor Space Outage (ft):	10.1250
Tank Shell Height (ft):	20.0000
Average Liquid Height (ft):	10.0000
Roof Outage (ft):	0.1250
Roof Outage (Cone Roof)	
Roof Outage (ft):	0.1250
Roof Height (ft):	0.0000
Roof Slope (ft/ft):	0.0625
Shell Radius (ft):	6.0000
Vapor Density	
Vapor Density (lb/cu ft):	0.0016
Vapor Molecular Weight (lb/lb-mole):	28.8657
Vapor Pressure at Daily Average Liquid	
Surface Temperature (psia):	0.2982
Daily Avg. Liquid Surface Temp. (deg. R):	515.0759
Daily Average Ambient Temp. (deg. F):	49.0583
Ideal Gas Constant R	
(psia cuft / (lb-mol-deg R)):	10.731
Liquid Bulk Temperature (deg. R):	510.9683
Tank Paint Solar Absorptance (Shell):	0.5400
Tank Paint Solar Absorptance (Roof):	0.5400
Daily Total Solar Insulation	
Factor (Btu/sqft day):	1,193.8870
Vapor Space Expansion Factor	
Vapor Space Expansion Factor:	0.0056
Daily Vapor Temperature Range (deg. R):	35.4636
Daily Vapor Pressure Range (psia):	0.1507
Breather Vent Press. Setting Range(psia):	1.0000
Vapor Pressure at Daily Average Liquid	
Surface Temperature (psia):	0.2982
Vapor Pressure at Daily Minimum Liquid	
Surface Temperature (psia):	0.2314
Vapor Pressure at Daily Maximum Liquid	
Surface Temperature (psia):	0.3821
Daily Avg. Liquid Surface Temp. (deg R):	515.0759
Daily Min. Liquid Surface Temp. (deg R):	506.2100
Daily Max. Liquid Surface Temp. (deg R):	523.9417
Daily Ambient Temp. Range (deg. R):	24.1833
Vented Vapor Saturation Factor	
Vented Vapor Saturation Factor:	0.8621
Vapor Pressure at Daily Average Liquid:	
Surface Temperature (psia):	0.2982
Vapor Space Outage (ft):	10.1250
Working Losses (lb):	1,866.9532
Vapor Molecular Weight (lb/lb-mole):	28.8657
Vapor Pressure at Daily Average Liquid	
Surface Temperature (psia):	0.2982
Annual Net Throughput (gal/yr.):	51,635,520.0000
Annual Turnovers:	3,073.5429
Turnover Factor:	0.1764
Maximum Liquid Volume (gal):	16,800.0000
Maximum Liquid Height (ft):	20.0000
Tank Diameter (ft):	12.0000
Working Loss Product Factor:	1.0000
Total Losses (lb):	1,870.1102

TANKS 4.0.9d
Emissions Report - Detail Format
Individual Tank Emission Totals

Emissions Report for: Annual**WEU-2 Liquid Loading - Vertical Fixed Roof Tank**

Components	Losses(lbs)		
	Working Loss	Breathing Loss	Total Emissions
Produced Fluids	1,866.95	3.16	1,870.11
methane	9.20	0.02	9.22
Propane (-n)	607.19	1.03	608.21
Butane (-n)	6.86	0.01	6.88
Isopentane	134.39	0.23	134.62
Pentane (-n)	116.53	0.20	116.72
Hexane (-n)	92.86	0.16	93.02

2,2,4-Trimethylpentane	0.01	0.00	0.01
Benzene	1.12	0.00	1.13
Heptane (-n)	50.87	0.09	50.95
Toluene	2.15	0.00	2.15
Octane (-n)	13.53	0.02	13.55
Ethylbenzene	0.06	0.00	0.06
Xylene (-o)	0.75	0.00	0.75
Nonane (-n)	6.31	0.01	6.32
Decane (-n)	10.26	0.02	10.28
Water	814.86	1.38	816.24

ATTACHMENT J

Class I Legal Advertisement

AIR QUALITY PERMIT NOTICE Notice of Application

Notice is given that EQT Production has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a Class II General Permit (G70-A) for an existing natural gas production wellpad. The facility is located in Doddridge County, West Virginia approximately 1.67 miles South of West Union, WV at 39.27225, -80.77145.

The applicant estimates that the potential to discharge the following Regulated Air Pollutants will be:

Pollutant	Emissions (tons per year)
NO _x	12.90
CO	10.84
VOC	83.64
SO ₂	0.08
PM	42.99
Total HAPs	2.96
Carbon Dioxide Equivalents (CO ₂ e)	21,372

Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57th Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1250, during normal business hours.

Dated this XX day of July, 2015.

By: EQT Production
Kenneth Kirk, Executive Vice President
625 Liberty Ave Suite 1700
Pittsburgh, PA 15222

ATTACHMENT L

General Permit Registration Application Fee

ATTACHMENT O

Emission Summary Sheet

G70-A EMISSIONS SUMMARY SHEET

Emission Point ID No.	Emission Point Type ¹	Emission Unit Vented Through This Point		Air Pollution Control Device		All Regulated Pollutants - Chemical Name/CAS ² (Speciate VOCs & HAPS)	Maximum Potential Uncontrolled Emissions ³		Maximum Potential Controlled Emissions ⁴		Emission Form or Phase (At exit conditions, Solid, Liquid or Gas/Vapor)	Est. Method Used ⁵
		ID No.	Source	ID No.	Device Type		lb/hr	ton/yr	lb/hr	ton/yr		
C001-C002 (Total-All Tanks)	Upward vertical stack	S031 – S042	Condensate Storage Tanks	C001/C002	Combustor	VOC HAPs	248.40 9.50	1,088.02 41.64	12.42 0.48	54.40 2.09	Gas/Vapor	E&P Tank v2.0
E043	Upward vertical stack	S043	Sand Separator Tank	C001/C002	Combustor	VOC HAPS	0.04 <0.01	0.18 0.01	<0.01 <0.01	<0.01 <0.01	Gas/Vapor	E&P Tank v2.0
E024 – E028, (Total – All units)	Upward vertical stack	S024 – S028	0.77 MMBtu/hr Line Heaters	None	---	NO _x CO PM/PM ₁₀ /PM _{2.5} SO ₂ VOC CO _{2e} HAPs	0.31 0.26 0.02 <0.01 0.02 450 <0.01	1.37 1.15 0.10 <0.01 0.08 1,973 0.03	0.31 0.26 0.02 <0.01 0.02 450 <0.01	1.37 1.15 0.10 <0.01 0.08 1,973 0.03	Gas/Vapor	AP-42
E023 (Total – All units)	Upward vertical stack	S023	1.15 MMBtu/hr Line Heater	None	---	NO _x CO PM/PM ₁₀ /PM _{2.5} SO ₂ VOC CO _{2e} HAPs	0.09 0.08 <0.01 <0.01 135 <0.01	0.41 0.35 0.03 <0.01 0.02 592 0.01	0.09 0.08 <0.01 <0.01 135 <0.01	0.41 0.35 0.03 <0.01 0.02 592 0.01	Gas/Vapor	AP-42
E022, E044 – E047 (Total – All units)	Upward vertical stack	S022, S044 – S047	1.54 MMBtu/hr Line Heaters	None	---	NO _x CO PM/PM ₁₀ /PM _{2.5} SO ₂ VOC CO _{2e} HAPs	0.63 0.53 0.05 <0.01 0.03 901 0.01	2.75 2.31 0.21 0.02 0.15 3,946 0.05	0.63 0.53 0.05 <0.01 0.03 901 0.01	2.75 2.31 0.21 0.02 0.15 3,946 0.05	Gas/Vapor	AP-42
E029 – E030, E048 (Total – All units)	Upward vertical stack	S029 – S030, S048	TEGs	None	---	NO _x CO PM/PM ₁₀ /PM _{2.5} SO ₂ VOC CO _{2e} HAPs	<0.01 <0.01 <0.01 <0.01 <0.01 5 <0.01	0.01 <0.01 <0.01 <0.01 <0.01 20 <0.01	<0.01 <0.01 <0.01 <0.01 <0.01 5 <0.01	0.01 <0.01 <0.01 <0.01 <0.01 20 <0.01	Gas/Vapor	AP-42
E049 (Uncaptured - Uncontrolled)	Upward vertical stack	Fugitive	Condensate Truck Loading	None	---	VOC HAPs	1.59 0.04	6.94 0.16	0.48 0.01	2.08 0.05	Gas/Vapor	AP-42
C001-C002 (Controlled)	Upward vertical stack	S031 – S042	Condensate Truck Loading	C001/C002	Combustor	VOC HAPs	1.59 0.04	6.94 0.16	0.06 <0.01	0.24 <0.01	Gas/Vapor	AP-42
C001- C002 (Total – All units)	Upward vertical stack	C001, C002	Combustor	NA	---	NO _x CO PM/PM ₁₀ /PM _{2.5} SO ₂ CO _{2e}	1.91 1.60 0.14 0.01 3,085	8.35 7.02 0.63 0.05 13,513	1.91 1.60 0.14 0.01 3,085	8.35 7.02 0.63 0.05 13,513	Gas/Vapor	AP-42

The EMISSION SUMMARY SHEET provides a summation of emissions by emission unit. Note that uncaptured process emission unit emissions are not typically considered to be fugitive and must be accounted for on the appropriate EMISSIONS UNIT DATA SHEET and on the EMISSIONS SUMMARY SHEET. Please note that total emissions from the source are equal to all vented emissions, all fugitive emissions, plus all other emissions (e.g. uncaptured emissions). Please complete the FUGITIVE EMISSIONS DATA SUMMARY SHEET for fugitive emission activities.

¹ Please add descriptors such as upward vertical stack, downward vertical stack, horizontal stack, relief vent, rain cap, etc.

² List all regulated air pollutants. Speciate VOCs, including all HAPs. Follow chemical name with Chemical Abstracts Service (CAS) number. **LIST** Acids, CO, CS₂, VOCs, H₂S, Inorganics, Lead, Organics, O₃, NO, NO₂, SO₂, SO₃, all applicable Greenhouse Gases (including CO₂ and methane), etc. **DO NOT LIST** H₂, H₂O, N₂, O₂, and Noble Gases

³ Give maximum potential emission rate with no control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

⁴ Give maximum potential emission rate with proposed control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

⁵ Indicate method used to determine emission rate as follows: MB = material balance; ST = stack test (give date of test); EE = engineering estimate; M = modeling; O = other (specify).