

July 17, 2015

Beverly Mckeone  
West Virginia Department of Environmental Protection  
Bureau of Air Quality  
601 57<sup>th</sup> Street  
Charleston, WV 25304

***Re: CONE Midstream Partners LP Rule 13 Permit Modification Application  
Majorsville Station R13-3081B***

Dear Ms. Mckeone:

As outlined in CONE Midstream Partners response to the Notice of Violation letter from the Director dated June 18<sup>th</sup> and received by CONE on June 22<sup>nd</sup>, CONE hereby submits the enclosed Rule 13 Permit Modification Application to add the emergency blowdown flare. Additionally, CONE is requesting approval to add an additional dehydration unit with miscellaneous support equipment and proposes to remove two existing natural gas fired compressor engines from the facility. Please find enclosed one (1) hardcopy original of the application, one (1) electronic copy, and associated permit fee. The public notice will be run at the first available publication date. The Affidavit of publication will be forwarded to your attention upon receipt.

If you have any questions regarding this matter feel free to contact me at 724-485-3156 or at [PatrickFlynn@ConsolEnergy.com](mailto:PatrickFlynn@ConsolEnergy.com).

Sincerely,

A handwritten signature in blue ink that reads 'Patrick D. Flynn'.

Patrick Flynn  
Air Quality Engineer  
CONSOL Energy



**R-13 PERMIT APPLICATION**  
**CONE Midstream Partners, LP > Majorsville Station**

**Modification**

**R13-3081B**

Prepared By:

TRINITY CONSULTANTS  
4500 Brooktree Rd.  
Suite 103  
Wexford, PA 15090  
(724) 935-2611

June 2015

Project 153901.0019

**Trinity**  
**Consultants**

*Environmental solutions delivered uncommonly well*

## TABLE OF CONTENTS

---

<b>1. INTRODUCTION</b>	<b>3</b>
<b>1.1. FACILITY AND PROJECT DESCRIPTION</b>	<b>3</b>
<b>1.2. R-13 APPLICATION ORGANIZATION</b>	<b>4</b>
<b>2. SAMPLE EMISSION SOURCE CALCULATIONS</b>	<b>5</b>
<b>3. R13 APPLICATION FORM</b>	<b>6</b>
<b>ATTACHMENT A: CURRENT BUSINESS CERTIFICATE</b>	
<b>ATTACHMENT B: MAP</b>	
<b>ATTACHMENT C: INSTALLATION AND START UP SCHEDULE</b>	
<b>ATTACHMENT D: REGULATORY DISCUSSION</b>	
<b>ATTACHMENT E: PLOT PLAN</b>	
<b>ATTACHMENT F: DETAILED PROCESS FLOW DIAGRAM</b>	
<b>ATTACHMENT G: PROCESS DESCRIPTION</b>	
<b>ATTACHMENT I: EMISSION UNITS TABLE</b>	
<b>ATTACHMENT J: EMISSION POINTS DATA SUMMARY SHEET</b>	
<b>ATTACHMENT K: FUGITIVE EMISSIONS DATA SUMMARY SHEET</b>	
<b>ATTACHMENT L: EMISSIONS UNIT DATA SHEETS</b>	
<b>ATTACHMENT M: AIR POLLUTION CONTROL DEVICE SHEET</b>	
<b>ATTACHMENT N: SUPPORTING EMISSION CALCULATIONS</b>	
<b>ATTACHMENT O: MONITORING/RECORDKEEPING/REPORTING/TESTING PLANS</b>	
<b>ATTACHMENT P: PUBLIC NOTICE</b>	

# 1. INTRODUCTION

---

CONE Midstream Partners, LP (CONE) is submitting this modification application to the West Virginia Department of Environmental Protection (WVDEP) for a natural gas gathering facility located in Marshall County, West Virginia, (Majorsville Station). Specifically, this application seeks to authorize an increase in the current permit throughputs for the existing dehydration unit at the site (permitted under Permit no. R13-3081B), remove two (2) existing natural gas fired compressor engines, as well as installation of one (1) blowdown flare, one (1) additional dehydration unit with associated reboiler and vapor combustor.

## 1.1. FACILITY AND PROJECT DESCRIPTION

The Majorsville is a natural gas gathering facility. Natural gas and liquids (condensate and water) from nearby wells will undergo compression and dehydration before it is transported to a gathering line for additional processing. The station currently consists of the following equipment:

- > Two (2) 150 million standard cubic feet per day (MMSCFD) triethylene glycol (TEG) dehydration unit with associated reboilers (each rated at 2.86 MMBtu/hr) and enclosed ground flares (each rated at 6.0 MMBtu/hr)
- > Four (4) Caterpillar G3608LE compressor engines (each rated at 2,370 horsepower [hp]), each controlled by an oxidation catalyst for carbon monoxide (CO), volatile organic compounds (VOC), and formaldehyde emission control
- > One (1) Caterpillar 3606 compressor engine (rated at 1,775 bhp) controlled by an oxidation catalyst
- > One (1) Condensate Stabilizer Reboiler (rated at 0.75 MMBtu/hr)
- > One (1) Hot Oil heater rated at 7.13 MMBtu/hr
- > Eleven (11) miscellaneous storage tanks (21,000 gallons or less)
- > One (1) 755 hp Cummins emergency generator

In anticipation of increased gas flow to the facility, CONE is proposing to:

- > Install one (1) 200 MMSCFD dehydration unit with associated reboiler (rated at 2.86 MMBtu/hr) and ground flares (rated at 6.0 MMBtu/hr)
- > Increase the current permit throughput of the existing dehydration units (DEHY-1, DEHY-2) at the facility from 150 MMSCFD to 200 MMSCFD.
- > Remove three (3) existing permitted natural gas fired compressor engines (E-3 to E-5) and replace them with three (3) electric compressors (each motor is rated at 4,500 hp).

Additionally, this application:

- > Request that the department revise the control device description for the 2,370 HP Caterpillar G3608 LE compressor engines in Table 1.0 of the permit. The engine is currently controlled by an oxidation catalysts and not a selective catalyst reduction (SCR) device as incorrectly listed in the permit
- > Request that the department revise the heat input rating (MMBtu/hr) for the dehydration unit enclosed ground flare (FL-1) in Table 1.0 of the permit. The rating of the enclosed ground flare is 6.0 MMBtu/hr.
- > Incorporate one (1) existing station blowdown and emergency flare (nominally rated at 173.5 MMBtu/hr) for station gas blowdown activities into the permit.
- > Request that the department limit the estimated blowdown volume (scf/yr) to the proposed blowdown flare at 25 million standard cubic feet per yr (25 MMSCF/yr) in the permit.

A process flow diagram is included as Attachment F.

The current permit, R13-3081B, was issued with no sources aggregated with the Majorsville Station. No changes have been made with respect to nearby sources and/or wells feeding the station since that time. Therefore, the stationary source determination is the same for the facility

## 1.2. R-13 APPLICATION ORGANIZATION

This R-13 permit application is organized as follows:

- > Section 2: Sample Emission Source Calculations;
- > Section 3: R-13 Application Forms;
- > Attachment A: Business Certificate;
- > Attachment B: Map;
- > Attachment C: Installation and Start Up Schedule;
- > Attachment D: Regulatory Discussion;
- > Attachment E: Plot Plan;
- > Attachment F: Detailed Process Flow Diagram;
- > Attachment G: Process Description;
- > Attachment I: Emission Units Table;
- > Attachment J: Emission Points Data Summary Sheet;
- > Attachment K: Fugitive Emissions Data Summary Sheet;
- > Attachment L: Emissions Unit Data Sheets;
- > Attachment M: Air Pollution Control Device Sheet;
- > Attachment N: Supporting Emission Calculations;
- > Attachment O: Monitoring/Recordkeeping/Reporting/Testing Plans
- > Attachment P: Public Notice; and
- > Application Fee.

## 2. SAMPLE EMISSION SOURCE CALCULATIONS

---

The characteristics of air emissions from the Majorsville Station, along with the methodology used for calculating emissions from the proposed new sources, are described in narrative form below. Detailed supporting calculations are also provided in Attachment N.

Emissions from the proposed project will result from the TEG dehydration unit, and natural gas combustion in the reboiler and blowdown flare. In addition, fugitive emissions from component leaks will result from the increase associated piping components from the additional dehydration unit and operation of the station. There will be no emission increases associated with the three (3) compressor motors, as they are electrically powered. The methodologies employed in calculating emissions from these sources have been summarized below.

- > **Reboiler:** Potential emissions from the proposed natural gas-fired reboiler of all criteria pollutants and HAPs are calculated using U.S. EPA's AP-42 factors for natural gas combustion equipment.<sup>1</sup> Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.<sup>2</sup>
- > **Dehydration Unit and Enclosed Ground Flare:** Potential emissions of HAPs, VOC, and methane from the dehydration units are calculated using GRI-GLYCalc. Note that the maximum pump rate is utilized in accordance with recent revisions in Subpart HH. Emissions of other criteria pollutants are calculated for natural gas combustion in the enclosed ground flare using U.S. EPA's AP-42 factors for external combustion of natural gas.<sup>1</sup> Greenhouse gas emissions from combustion in the combustor are calculated according to the procedures in 40 CFR 98 Subpart C.
- > **Blowdown Flare:** Potential emissions of nitrogen oxides (NO<sub>x</sub>), CO, and other criteria pollutants from the pilot were calculated using AP-42 factors for natural gas combustion equipment assuming full time operation (i.e., 8760 hrs/yr). VOC and HAP emissions from the flare were estimated using mass balance equations based on the volume of gas sent to the flare. Flare emissions of other criteria pollutants were calculated using AP-42 emission factors for Industrial flares. Short-term emissions were calculated using the nominal rating of the flare, while annual emissions were calculated using the volume of gas vented and the heating value of the gas. Greenhouse gas emissions from combustion in the flare are calculated according to the procedures in 40 CFR 98 Subpart C.

---

<sup>1</sup> U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 1.4, *Natural Gas Combustion*, Supplement D, July 1998.

<sup>2</sup> 40 CFR 98 Subpart C, *General Stationary Fuel combustion Sources*, Tables C-1 and C-2.

### 3. R13 APPLICATION FORM

---

The WVDEP permit application forms contained in this application include all applicable R13 application forms including the required attachments.



WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION  
**DIVISION OF AIR QUALITY**

601 57<sup>th</sup> Street, SE  
 Charleston, WV 25304  
 (304) 926-0475  
[www.dep.wv.gov/daq](http://www.dep.wv.gov/daq)

**APPLICATION FOR NSR PERMIT**  
**AND**  
**TITLE V PERMIT REVISION**  
**(OPTIONAL)**

PLEASE CHECK ALL THAT APPLY TO NSR (45CSR13) (IF KNOWN):

- CONSTRUCTION     MODIFICATION     RELOCATION  
 CLASS I ADMINISTRATIVE UPDATE     TEMPORARY  
 CLASS II ADMINISTRATIVE UPDATE     AFTER-THE-FACT

PLEASE CHECK TYPE OF 45CSR30 (TITLE V) REVISION (IF ANY):

- ADMINISTRATIVE AMENDMENT     MINOR MODIFICATION  
 SIGNIFICANT MODIFICATION

IF ANY BOX ABOVE IS CHECKED, INCLUDE TITLE V REVISION INFORMATION AS ATTACHMENT S TO THIS APPLICATION

**FOR TITLE V FACILITIES ONLY:** Please refer to "Title V Revision Guidance" in order to determine your Title V Revision options (Appendix A, "Title V Permit Revision Flowchart") and ability to operate with the changes requested in this Permit Application.

**Section I. General**

1. Name of applicant (as registered with the WV Secretary of State's Office):

CONE Gathering LLC

2. Federal Employer ID No. (FEIN):

45-3344658

3. Name of facility (if different from above):

Majorsville Station

4. The applicant is the:

- OWNER     OPERATOR     BOTH

5A. Applicant's mailing address:

200 Evergreen Drive  
 Waynesburg, PA

5B. Facility's present physical address:

3700 Number Two Ridge Road  
 Dallas, WV 26036

6. West Virginia Business Registration. Is the applicant a resident of the State of West Virginia?     YES     NO

- If YES, provide a copy of the **Certificate of Incorporation/Organization/Limited Partnership** (one page) including any name change amendments or other Business Registration Certificate as **Attachment A**.
- If NO, provide a copy of the **Certificate of Authority/Authority of L.L.C./Registration** (one page) including any name change amendments or other Business Certificate as **Attachment A**.

7. If applicant is a subsidiary corporation, please provide the name of parent corporation:

8. Does the applicant own, lease, have an option to buy or otherwise have control of the proposed site?     YES     NO

- If YES, please explain:    Owner

- If NO, you are not eligible for a permit for this source.

9. Type of plant or facility (stationary source) to be **constructed, modified, relocated, administratively updated** or **temporarily permitted** (e.g., coal preparation plant, primary crusher, etc.): Natural Gas Dehydration Facility

10. North American Industry Classification System (NAICS) code for the facility:

211111

11A. DAQ Plant ID No. (for existing facilities only):

051-00143

11B. List all current 45CSR13 and 45CSR30 (Title V) permit numbers associated with this process (for existing facilities only):

R13-3081B

**All of the required forms and additional information can be found under the Permitting Section of DAQ's website, or requested by phone.**

12A.

- For **Modifications, Administrative Updates or Temporary permits** at an existing facility, please provide directions to the *present location* of the facility from the nearest state road;
- For **Construction or Relocation permits**, please provide directions to the *proposed new site location* from the nearest state road. Include a **MAP as Attachment B**.

*From Wheeling: Travel east on I-70 for approximately 9.3 miles. Take Exit 11 onto Dallas Pike. Turn right onto Dallas Pike and travel approximately 1.7 miles. Take a slight left onto Middle Wheeling Creek Road (Old Co. 39) for 0.4 miles. Continue onto Dallas Pike and travel 3.0 miles. Turn right onto Number 2 Ridge Road and travel 3.6 miles. Turn right and the facility will be 0.5 miles on the right.*

12.B. New site address (if applicable):

12C. Nearest city or town:

12D. County:

Majorsville

Marshall

12.E. UTM Northing (KM): 4,424.302

12F. UTM Easting (KM): 539.827

12G. UTM Zone: 17

13. Briefly describe the proposed change(s) at the facility:

CONE is proposing to increase the throughput of the existing dehydration units (150 MMSCFD to 200 MMSCFD) and installation of additional equipment that includes: One (1) blowdown flare, one (1) 200 MMSCFD dehydration unit, associated reboiler (2.86 MMBtu/hr), and enclosed combustor (6.0 MMBtu/hr). Additionally, CONE is proposing to remove two (2) natural gas fired compressor engines and replace with three (3) electric compressor motors (each rated at 4,500 HP).

14A. Provide the date of anticipated installation or change:     /     /

- If this is an **After-The-Fact** permit application, provide the date upon which the proposed change did happen: Blowdown Flare Only – April 2013

14B. Date of anticipated Start-Up if a permit is granted: .....

As soon as permitted

14C. Provide a **Schedule** of the planned **Installation of/Change** to and **Start-Up** of each of the units proposed in this permit application as **Attachment C** (if more than one unit is involved).

15. Provide maximum projected **Operating Schedule** of activity/activities outlined in this application:

Hours Per Day 24     Days Per Week 7     Weeks Per Year 52

16. Is demolition or physical renovation at an existing facility involved?    YES      NO

17. **Risk Management Plans.** If this facility is subject to 112(r) of the 1990 CAAA, or will become subject due to proposed changes (for applicability help see [www.epa.gov/ceppo](http://www.epa.gov/ceppo)), submit your **Risk Management Plan (RMP)** to U. S. EPA Region III.

18. **Regulatory Discussion.** List all Federal and State air pollution control regulations that you believe are applicable to the proposed process (*if known*). A list of possible applicable requirements is also included in Attachment S of this application (Title V Permit Revision Information). Discuss applicability and proposed demonstration(s) of compliance (*if known*). Provide this information as **Attachment D**.

## ***Section II. Additional attachments and supporting documents.***

19. Include a check payable to WVDEP – Division of Air Quality with the appropriate **application fee** (per 45CSR22 and 45CSR13).

20. Include a **Table of Contents** as the first page of your application package.

21. Provide a **Plot Plan**, e.g. scaled map(s) and/or sketch(es) showing the location of the property on which the stationary source(s) is or is to be located as **Attachment E** (Refer to **Plot Plan Guidance**).

- Indicate the location of the nearest occupied structure (e.g. church, school, business, residence).

22. Provide a **Detailed Process Flow Diagram(s)** showing each proposed or modified emissions unit, emission point and control device as **Attachment F**.

23. Provide a **Process Description** as **Attachment G**.

- Also describe and quantify to the extent possible all changes made to the facility since the last permit review (if applicable).

All of the required forms and additional information can be found under the Permitting Section of DAQ's website, or requested by phone.

24. Provide **Material Safety Data Sheets (MSDS)** for all materials processed, used or produced as **Attachment H**.

– For chemical processes, provide a MSDS for each compound emitted to the air.

25. Fill out the **Emission Units Table** and provide it as **Attachment I**.

26. Fill out the **Emission Points Data Summary Sheet (Table 1 and Table 2)** and provide it as **Attachment J**.

27. Fill out the **Fugitive Emissions Data Summary Sheet** and provide it as **Attachment K**.

28. Check all applicable **Emissions Unit Data Sheets** listed below:

- |   |  |  |
|---|--|--|
| <input type="checkbox"/> Bulk Liquid Transfer Operations                              | <input type="checkbox"/> Haul Road Emissions     | <input type="checkbox"/> Quarry  |
| <input type="checkbox"/> Chemical Processes   | <input type="checkbox"/> Hot Mix Asphalt Plant   | <input type="checkbox"/> Solid Materials Sizing, Handling and Storage Facilities |
| <input type="checkbox"/> Concrete Batch Plant   | <input type="checkbox"/> Incinerator             | <input type="checkbox"/> Storage Tanks   |
| <input type="checkbox"/> Grey Iron and Steel Foundry                                  | <input type="checkbox"/> Indirect Heat Exchanger |  |
| <input checked="" type="checkbox"/> General Emission Unit, specify, Dehydration unit, |  |  |

Fill out and provide the **Emissions Unit Data Sheet(s)** as **Attachment L**.

29. Check all applicable **Air Pollution Control Device Sheets** listed below:

- |  |   |  |
|--|---|--|
| <input type="checkbox"/> Absorption Systems        | <input type="checkbox"/> Baghouse                   | <input checked="" type="checkbox"/> Flare      |
| <input type="checkbox"/> Adsorption Systems        | <input type="checkbox"/> Condenser                  | <input type="checkbox"/> Mechanical Collector  |
| <input type="checkbox"/> Afterburner               | <input type="checkbox"/> Electrostatic Precipitator | <input type="checkbox"/> Wet Collecting System |
| <input type="checkbox"/> Other Collectors, specify |   |  |

Fill out and provide the **Air Pollution Control Device Sheet(s)** as **Attachment M**.

30. Provide all **Supporting Emissions Calculations** as **Attachment N**, or attach the calculations directly to the forms listed in Items 28 through 31.

31. **Monitoring, Recordkeeping, Reporting and Testing Plans.** Attach proposed monitoring, recordkeeping, reporting and testing plans in order to demonstrate compliance with the proposed emissions limits and operating parameters in this permit application. Provide this information as **Attachment O**.

➤ Please be aware that all permits must be practically enforceable whether or not the applicant chooses to propose such measures. Additionally, the DAQ may not be able to accept all measures proposed by the applicant. If none of these plans are proposed by the applicant, DAQ will develop such plans and include them in the permit.

32. **Public Notice.** At the time that the application is submitted, place a **Class I Legal Advertisement** in a newspaper of general circulation in the area where the source is or will be located (See 45CSR§13-8.3 through 45CSR§13-8.5 and **Example Legal Advertisement** for details). Please submit the **Affidavit of Publication** as **Attachment P** immediately upon receipt.

33. **Business Confidentiality Claims.** Does this application include confidential information (per 45CSR31)?

YES  NO

➤ If **YES**, identify each segment of information on each page that is submitted as confidential and provide justification for each segment claimed confidential, including the criteria under 45CSR§31-4.1, and in accordance with the DAQ's **"Precautionary Notice – Claims of Confidentiality"** guidance found in the **General Instructions** as **Attachment Q**.

### Section III. Certification of Information

34. **Authority/Delegation of Authority.** Only required when someone other than the responsible official signs the application. Check applicable **Authority Form** below:

- |  |   |
|--|---|
| <input type="checkbox"/> Authority of Corporation or Other Business Entity | <input type="checkbox"/> Authority of Partnership         |
| <input type="checkbox"/> Authority of Governmental Agency                  | <input type="checkbox"/> Authority of Limited Partnership |

Submit completed and signed **Authority Form** as **Attachment R**.

All of the required forms and additional information can be found under the Permitting Section of DAQ's website, or requested by phone.

35A. **Certification of Information.** To certify this permit application, a Responsible Official (per 45CSR§13-2.22 and 45CSR§30-2.28) or Authorized Representative shall check the appropriate box and sign below.


**Certification of Truth, Accuracy, and Completeness**

I, the undersigned  **Responsible Official** /  **Authorized Representative**, hereby certify that all information contained in this application and any supporting documents appended hereto, is true, accurate, and complete based on information and belief after reasonable inquiry I further agree to assume responsibility for the construction, modification and/or relocation and operation of the stationary source described herein in accordance with this application and any amendments thereto, as well as the Department of Environmental Protection, Division of Air Quality permit issued in accordance with this application, along with all applicable rules and regulations of the West Virginia Division of Air Quality and W.Va. Code § 22-5-1 et seq. (State Air Pollution Control Act). If the business or agency changes its Responsible Official or Authorized Representative, the Director of the Division of Air Quality will be notified in writing within 30 days of the official change.

**Compliance Certification**

Except for requirements identified in the Title V Application for which compliance is not achieved, I, the undersigned hereby certify that, based on information and belief formed after reasonable inquiry, all air contaminant sources identified in this application are in compliance with all applicable requirements.

SIGNATURE \_\_\_\_\_

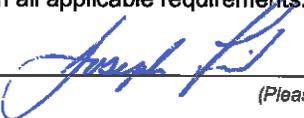

(Please use blue ink)

DATE: \_\_\_\_\_

7-17-15

(Please use blue ink)

35B. Printed name of signee: Joseph Fink

35C. Title: Chief Operating Officer

35D. E-mail:

35E. Phone:

35F. FAX:

36A. Printed name of contact person (if different from above): David Morris

36B. Title: Air Quality Manager

36C. E-mail:

DavidMorris@consolenergy.com

36D. Phone: 724-485-3063

36E. FAX:

**PLEASE CHECK ALL APPLICABLE ATTACHMENTS INCLUDED WITH THIS PERMIT APPLICATION:**

- |  |  |
|--|--|
| <input checked="" type="checkbox"/> Attachment A: Business Certificate               | <input checked="" type="checkbox"/> Attachment K: Fugitive Emissions Data Summary Sheet            |
| <input checked="" type="checkbox"/> Attachment B: Map(s)                             | <input checked="" type="checkbox"/> Attachment L: Emissions Unit Data Sheet(s)                     |
| <input checked="" type="checkbox"/> Attachment C: Installation and Start Up Schedule | <input checked="" type="checkbox"/> Attachment M: Air Pollution Control Device Sheet(s)            |
| <input checked="" type="checkbox"/> Attachment D: Regulatory Discussion              | <input checked="" type="checkbox"/> Attachment N: Supporting Emissions Calculations                |
| <input checked="" type="checkbox"/> Attachment E: Plot Plan                          | <input checked="" type="checkbox"/> Attachment O: Monitoring/Recordkeeping/Reporting/Testing Plans |
| <input checked="" type="checkbox"/> Attachment F: Detailed Process Flow Diagram(s)   | <input checked="" type="checkbox"/> Attachment P: Public Notice                                    |
| <input checked="" type="checkbox"/> Attachment G: Process Description                | <input type="checkbox"/> Attachment Q: Business Confidential Claims                                |
| <input type="checkbox"/> Attachment H: Material Safety Data Sheets (MSDS)            | <input type="checkbox"/> Attachment R: Authority Forms   |
| <input checked="" type="checkbox"/> Attachment I: Emission Units Table               | <input type="checkbox"/> Attachment S: Title V Permit Revision Information                         |
| <input checked="" type="checkbox"/> Attachment J: Emission Points Data Summary Sheet | <input checked="" type="checkbox"/> Application Fee  |

*Please mail an original and three (3) copies of the complete permit application with the signature(s) to the DAQ, Permitting Section, at the address listed on the first page of this application. Please DO NOT fax permit applications.*

**FOR AGENCY USE ONLY – IF THIS IS A TITLE V SOURCE:**

- Forward 1 copy of the application to the Title V Permitting Group and:
- For Title V Administrative Amendments:
  - NSR permit writer should notify Title V permit writer of draft permit,
- For Title V Minor Modifications:
  - Title V permit writer should send appropriate notification to EPA and affected states within 5 days of receipt,
  - NSR permit writer should notify Title V permit writer of draft permit.
- For Title V Significant Modifications processed in parallel with NSR Permit revision:
  - NSR permit writer should notify a Title V permit writer of draft permit,
  - Public notice should reference both 45CSR13 and Title V permits,
  - EPA has 45 day review period of a draft permit.

*All of the required forms and additional information can be found under the Permitting Section of DAQ's website, or requested by phone.*

**ATTACHMENT A**

**Current Business Certificate**

# State of West Virginia



## Certificate

*I, Natalie E. Tennant, Secretary of State of the  
State of West Virginia, hereby certify that*

**CONE GATHERING LLC**

was duly authorized under the laws of this state to transact business in West Virginia as a foreign limited liability company on September 23, 2011.

The company is filed as an at-will company, for an indefinite period.

I further certify that the LLC (PLLC) has not been revoked by the State of West Virginia nor has a Certificate of Cancellation been issued.

Therefore, I hereby issue this

## CERTIFICATE OF AUTHORIZATION

Validation ID:8WV1H\_5P568



*Given under my hand and the  
Great Seal of the State of  
West Virginia on this day of  
April 09, 2014*

*Natalie E. Tennant*

*Secretary of State*

## ATTACHMENT B

Map



**Figure 1 - Map of Majorsville Compressor Station**

**ATTACHMENT C**

**Startup and Installation Schedule**

## Attachment C

### Schedule of Planned Installation and Start-Up

Unit	Installation Schedule	Startup Schedule
200 MMSCFD Dehydration Unit - Throughput Increase (DEHY-1)	2015	Upon issuance of permit
200 MMSCFD Dehydration Unit - Throughput Increase (DEHY-2)	2015	Upon issuance of permit
Three (3) 2,370 HP Caterpillar Compressor Engine ( E2-E4) - to be removed	2015	Upon issuance of permit
1,775 HP Caterpillar Compressor Engine ( E-5) to be removed	2015	Upon issuance of permit
200 MMSCFD Dehydration Unit (DEHY-3)	2015	Upon issuance of permit
173.5 MMBtu/hr Blowdown Flare (BDF-1)	2013	Already in Service
Reboiler (BLR-4)	2015	Upon issuance of permit
Enclosed Combustor (FL-3)	2015	Upon issuance of permit

**ATTACHMENT D**

**Regulatory Discussion**

## ATTACHMENT D - REGULATORY APPLICABILITY

This section documents the applicability determinations made for Federal and State air quality regulations. The monitoring, recordkeeping, reporting, and testing plan is presented in Attachment O. In this section, applicability or non-applicability of the following regulatory programs is addressed:

- > Prevention of Significant Deterioration (PSD) permitting;
- > Title V of the 1990 Clean Air Act Amendments;
- > New Source Performance Standards (NSPS);
- > National Emission Standards for Hazardous Air Pollutants (NESHAP); and
- > West Virginia State Implementation Plan (SIP) regulations.

This review is presented to supplement and/or add clarification to the information provided in the WVDEP R13A permit application forms. In addition to providing a summary of applicable requirements, this section of the application also provides non-applicability determinations for certain regulations, allowing the WVDEP to confirm that identified regulations are not applicable to the Majorsville Station. Note that explanations of non-applicability are limited to those regulations for which there may be some question of applicability specific to the operations at the Majorsville Station. Regulations that are categorically non-applicable are not discussed (e.g., NSPS Subpart J, Standards of Performance for Petroleum Refineries).

### Prevention of Significant Deterioration (PSD) Source Classification

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration (PSD) and new and modified sources of non-attainment pollutants under Non-Attainment New Source Review (NNSR). PSD and NNSR regulations apply when a major source makes a change, such as installing new equipment or modifying existing equipment, and a significant increase in emissions results from the change. The Majorsville Station is not a major source with respect to these programs since its potential emissions are below all the NNSR/PSD thresholds. As such, NNSR/PSD permitting is not triggered by this construction activity. CONE will monitor future construction activities at the site closely and will compare any future increase in emissions with the NSR/PSD thresholds to ensure these activities will not trigger this program.

### Title V Operating Permit Program

Title 40 of the Code of Federal Regulations Part 70 (40 CFR 70) establishes the federal Title V operating permit program. West Virginia has incorporated the provisions of this federal program in its Title V operating permit program in West Virginia Code of State Regulations (CSR) 45-30. The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP, and 100 tpy of all other regulated pollutants.<sup>1</sup> The potential emissions of all regulated pollutants are below the corresponding threshold(s) at this facility. Therefore, the Majorsville Station is not a major source for Title V purposes.

### New Source Performance Standards

New Source Performance Standards (NSPS), located in 40 CFR 60, require new, modified, or reconstructed sources to control emissions to the level achievable by the best demonstrated technology as specified in the applicable

---

<sup>1</sup> On June 23, 2014, the U.S Supreme Court decision in the case of *Utility Air Regulatory Group v. EPA* effectively changed the permitting procedures for GHGs under the PSD and Title V programs.

provisions. Moreover, any source subject to an NSPS is also subject to the general provisions of NSPS Subpart A, except where expressly noted. The following is a summary of applicability and non-applicability determinations for NSPS regulations of relevance to the proposed project at the Majorsville Station.

### ***NSPS Subpart 0000—Crude Oil and Natural Gas Production, Transmission, and Distribution***

Subpart 0000 - *Standards of Performance for Crude Oil and Natural Gas Production, Transmission, and Distribution*, applies to affected facilities that commenced construction, reconstruction, or modification after August 23, 2011. This NSPS was published in the Federal Register on August 16, 2012, with an effective date of October 15, 2012. The list of potentially affected facilities includes:

- > Gas wells
- > Centrifugal compressors
- > Reciprocating compressors
- > Pneumatic controllers
- > Storage vessels
- > Equipment (as defined in §60.5430) located at onshore natural gas processing plants
- > Sweetening units located onshore that process natural gas produced from either onshore or offshore wells

There are no storage tanks, reciprocating compressors, wet seal centrifugal compressors, or continuous bleed natural gas driven pneumatic controllers being proposed as part of this project. Therefore, the requirements of this subpart are not applicable.

### ***Non-Applicability of All Other NSPS***

NSPS are developed for particular industrial source categories. Other than NSPS developed for natural gas processing plants (Subpart 0000), boilers (Subpart Dc - not applicable due to size of unit), the applicability of a particular NSPS to the Majorsville Station can be readily ascertained based on the industrial source category covered. All other NSPS are categorically not applicable to proposed operations.

### **National Emission Standards for Hazardous Air Pollutants (NESHAP)**

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The Majorsville Station will be an Area (minor) source of HAP since its potential emissions of HAP are less than the 10/25 major source thresholds. NESHAP apply to sources in specifically regulated industrial source categories (Clean Air Act Section 112(d)) or on a case-by-case basis (Section 112(g)) for facilities not regulated as a specific industrial source type:

- > 40 CFR Part 63 Subpart HH - Oil and Natural Gas Production Facilities
- > 40 CFR Part 63 HHH - Natural Gas Transmission and Storage Facilities
- > 40 CFR Part 63 Subpart JJJJJ - Industrial, Commercial, and Institutional Boilers

The applicability of these NESHAP Subparts is discussed in the following sections.

#### ***40 CFR 63 Subpart HH - Oil and Natural Gas Production Facilities***

This subpart applies to affected emission points that are located at facilities that are major and area sources of HAP and either process, upgrade, or store hydrocarbon liquids prior to custody transfer or that process, upgrade, or store natural gas prior to entering the natural gas transmission and storage source category. For purposes of this subpart,

natural gas enters the natural gas transmission and storage source category after the natural gas processing plant, if present.

The Majorsville Station will be an area source of HAP emissions. The station will process natural gas in its glycol dehydrator prior to the point of custody transfer; therefore, the provisions of NESHAP Subpart HH apply to the Majorsville Station. The benzene emissions from the glycol dehydrator vents are less than 0.90 megagrams per year (1 tpy), therefore, the Majorsville Station is exempt from the requirements of NESHAP Subpart HH pursuant to 40 CFR §63.764(e)(1)(ii), except for the requirement to keep records of the actual average natural gas flow rate or actual average benzene emissions from the dehydrator, per 40 CFR §63.774(d)(1).

#### ***40 CFR 63 Subpart HHH - Natural Gas Transmission and Storage Facilities***

This standard applies to such units at natural gas transmission and storage facilities that are major sources of HAP emissions located downstream of the point of custody transfer (after processing and/or treatment in the production sector), but upstream of the distribution sector. The Majorsville Station is not a transmission facility; therefore, the provisions of NESHAP Subpart HHH do not apply to the Majorsville Station

#### ***40 CFR 63 Subpart JJJJJJ - Industrial, Commercial, and Institutional Boilers (Area Source Boiler MACT)***

This MACT standard applies to industrial, commercial, and institutional boilers of various sizes and fuel types. The proposed reboiler is a natural gas-fired and is specifically exempt from this subpart. Therefore, no sources at the Majorsville Station are subject to any requirements under 40 CFR 63 Subpart JJJJJJ

### **West Virginia SIP Regulations**

The Majorsville Station is potentially subject to regulations contained in the West Virginia Code of State Regulations, Chapter 45 (Code of State Regulations). The Code of State Regulations fall under two main categories, those regulations that are generally applicable (e.g., permitting requirements), and those that have specific applicability (e.g., PM standards for manufacturing equipment).

#### ***45 CSR 2: Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers***

45 CSR 2 applies to fuel burning units, defined as equipment burning fuel “for the primary purpose of producing heat or power by indirect heat transfer”. The reboiler is a fuel burning unit and therefore must comply with this regulation. Per 45 CSR 2-3, opacity of emissions from this unit shall not exceed 10 percent based on a six minute block average. Per 45 CSR 2-4, PM emissions from this unit will not exceed a level of 0.09 multiplied by the heat design input in MMBtu/hr of the unit.

#### ***45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor***

According to 45 CSR 4-3:

*No person shall cause, suffer, allow or permit the discharge of air pollutants which cause or contribute to an objectionable odor at any location occupied by the public.*

The Majorsville station is generally subject to this requirement. However, due to the nature of the process at the station, production of objectionable odor from the station during normal operation is unlikely.

#### ***45 CSR 6: Control of Air Pollution from the Combustion of Refuse***

45 CSR 6 applies to activities involving incineration of refuse, defined as “the destruction of combustible refuse by burning in a furnace designed for that purpose. For the purposes of this rule, the destruction of any combustible liquid or gaseous material by burning in a flare or flare stack, thermal oxidizer or thermal catalytic oxidizer stack shall be considered incineration.” The proposed enclosed combustor and blowdown flare are incinerators and therefore must comply with this regulation. Per 45 CSR 6-4.3, opacity of emissions from this unit shall not exceed 20 percent, except as provided by 6-

4.4. PM emissions from this unit will not exceed the levels calculated in accordance with 6-4.1.

#### ***45 CSR 16: Standards of Performance for New Stationary Sources***

45 CSR 16-1 incorporates the federal Clean Air Act (CAA) standards of performance for new stationary sources set forth in 40 CFR Part 60 by reference. As such, by complying with all applicable requirements of 40 CFR Part 60 at the Majorsville Station, CONE will be complying with 45 CSR 16.

#### ***45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter***

According to 45 CSR 17-3.1:

*No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property lines of the property on which the discharge originates or at any public or residential location, which causes or contributes to statutory air pollution.*


Due to the nature of the activities at the Majorsville Station it is unlikely that fugitive particulate matter emissions will be emitted under normal operating conditions. However, CONE will take measures to ensure any fugitive particulate matter emissions will not cross the property boundary should any such emissions occur.


# ATTACHMENT E

## Plot Plan

## ATTACHMENT F

### Detailed Process Flow Diagram

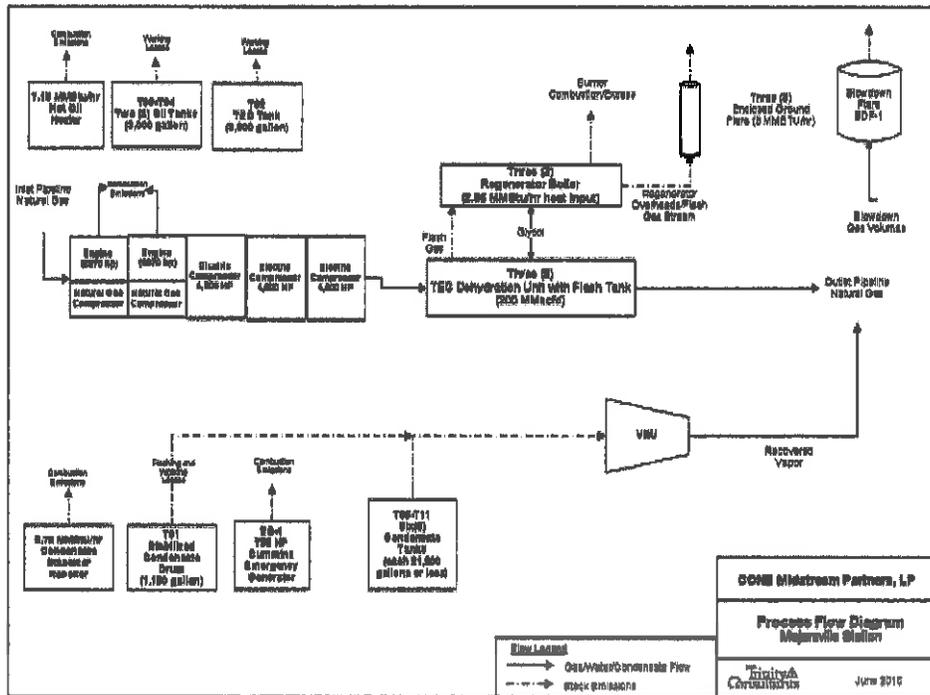

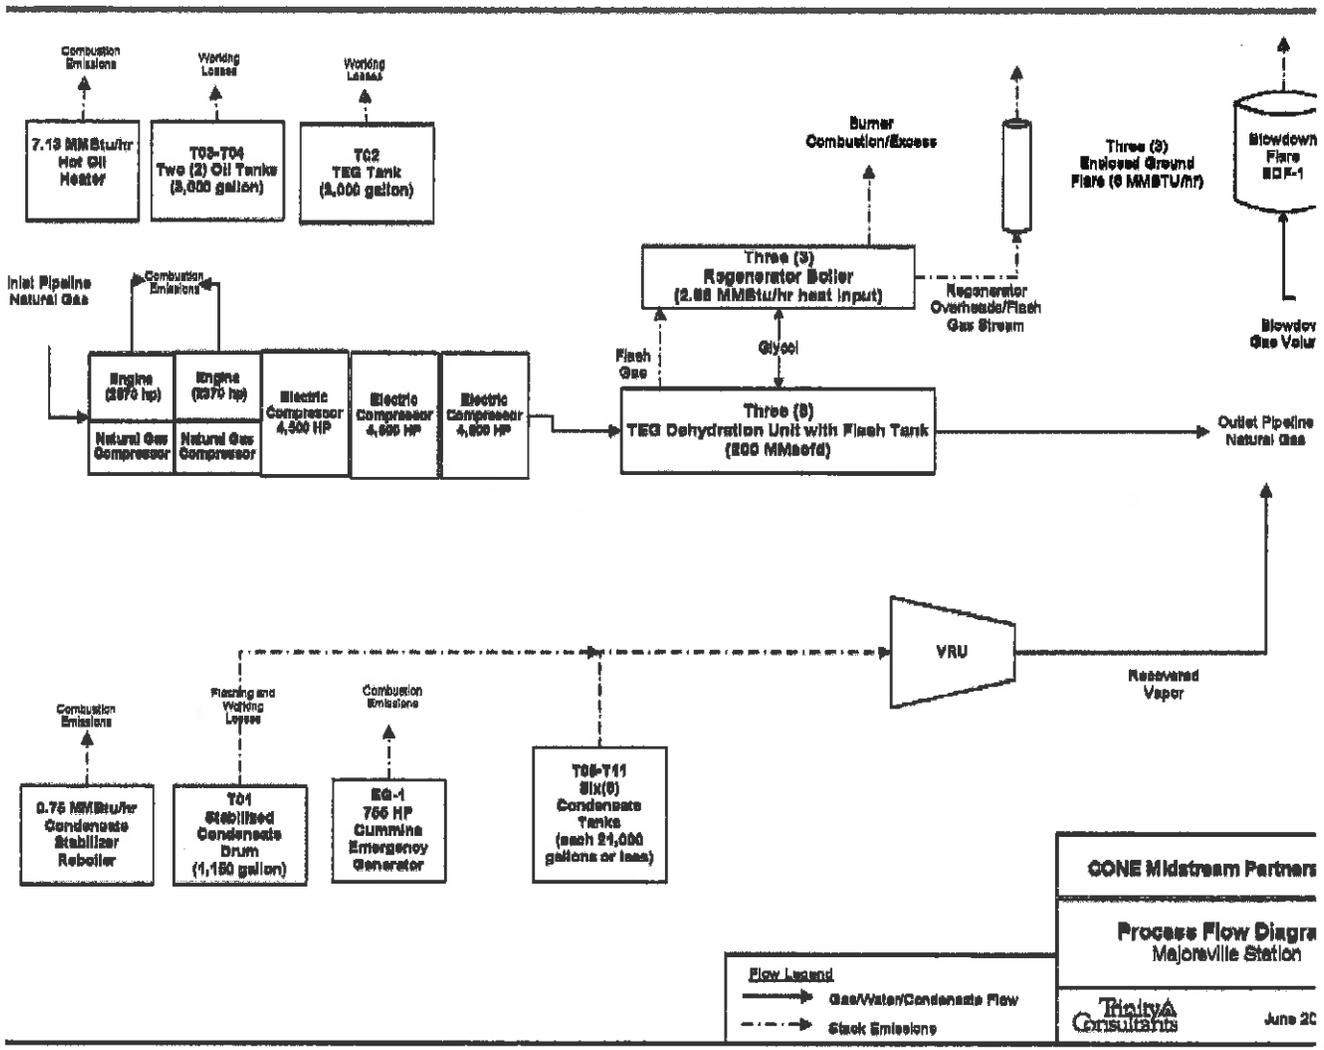

**CONE Midstream Partners**  
**Process Flow Diagram**  
**Majorsville Station**  
**Trinity Consultants** June 20

**Flow Legend**  
 ———> Gas/Water/Condensate Flow  
 - - - -> Stack Emissions

## ATTACHMENT G

### Process Description

## ATTACHMENT G - PROCESS DESCRIPTION

CONE Midstream Partners, LP (CONE) is proposing to increase the current permit limits of the existing dehydration units (150 MMSCFD to 200 MMSCFD) in addition to installing the following equipment: one (1) 200 MMSCFD dehydration unit with associated reboiler and enclosed ground flare. Additionally, CONE is proposing to remove the two (2) existing natural gas fired compressor engines (EG-4 & EG-5) and replace them with three (3) electric compressor units (each rated at 4,000 hp).

Natural gas enters the station via a pipeline system and is compressed using the natural gas-fired compressor engines. The compressed natural gas stream is then processed by each triethylene glycol (TEG) dehydration unit (with each associated reboiler). The dehydration unit will introduce TEG to the gas stream in a contact tower to absorb water vapor from the gas to a level not exceeding 7 pounds per million standard cubic feet (lb/MMscf). The TEG is then sent to the natural gas-fired reboiler. The water is evaporated from the TEG in the reboiler and discharged, and the glycol is then sent back to the contact tower for reuse. Each dehydration unit is equipped with an enclosed combustor which will control emissions from the dehydration still vent, and the emissions from the flash tank. The natural gas stream from the contact tower flows into the pipeline to be transported further along the pipeline system.

A process flow diagram for the proposed equipment is included as Attachment D.



## Attachment I

### Emission Units Table

(includes all emission units and air pollution control devices  
that will be part of this permit application review, regardless of permitting status)

Emission Unit ID <sup>1</sup>	Emission Point ID <sup>2</sup>	Emission Unit Description	Year Installed/ Modified	Design Capacity	Type <sup>3</sup> and Date of Change	Control Device <sup>4</sup>
E-1	E-1	Caterpillar G3608 LE DM8606-02	2012	2,370 bhp	Existing	Oxidation Catalyst
E-2	E-2	Caterpillar G3608 LE DM8606-02	2012	2,370 bhp	Existing	Oxidation Catalyst
EG-1	EG-1	Cummins QSX15-G9 NR2	2012	755 bhp	Existing	None
DEHY-1	FL-1	TEG Dehydration Unit Still Vent & Flash Tank	2012	200 MMSCFD	Modified – Increase throughput	FL-1
DEHY-2	FL-2	TEG Dehydration Unit Still Vent & Flash Tank	2014	200 MMSCFD	Modified – Increase throughput	FL-2
DEHY-3	FL-3	TEG Dehydration Unit Still Vent & Flash Tank	2015	200 MMSCFD	New	FL-3
BLR-1	BLR-1	TEG Dehydration Unit Reboiler	2012	2.86 MMBtu/hr	Existing	None
BLR-2	BLR-2	Condensate Stabilizer Reboiler	2012	0.75 MMBtu/hr	Existing	None
BLR-3	BLR-3	TEG Dehydration Unit Reboiler	2014	2.86 MMBtu/hr	Existing	None
BLR-4	BLR-4	TEG Dehydration Unit Reboiler	2015	2.86 MMBtu/hr	New	None
FL-1	FL-1	Enclosed Ground Flare	2012	6.0 MMBtu/hr	Existing	None
FL-2	FL-2	Enclosed Ground Flare	2014	6.0 MMBtu/hr	Existing	None
FL-3	FL-3	Enclosed Ground Flare	2015	6.0 MMBtu/hr	New	None
T01	T01	Stabilized Condensate Surge Drum	2012	1,150 gal	Existing	None
T02	T02	Triethylene Glycol Tank	2012	3,000 gal	Existing	None
T03	T03	Compressor Oil Tank	2012	3,000 gal	Existing	None
T04	T04	Engine Oil Tank	2012	3,000 gal	Existing	None
T05	T05	Water/Slop Tank	2014	16,800 gal	Existing	VRU
T06	VRU	Condensate – Water/Slop Separation	2014	21,000 gal	Existing	VRU

T07	VRU	Unstabilized Condensate Tank	2014	16,800 gal	Existing	VRU
T08	VRU	Condensate Tank	2014	16,800 gal	Existing	VRU
T09	VRU	Condensate Tank	2014	16,800 gal	Existing	VRU
T10	VRU	Condensate Tank and optional Water/Slop Storage	2014	16,800 gal	Existing	VRU
T11	VRU	Condensate or Water Storage Tank	2013	16,800 gal	Existing	VRU
BLT01	VRU	Bulk Liquids Transfer Loading	2013	Batch Unloading	Existing	VRU
BDF-1	BDF-1	Emergency Blowdown Flare	2013	174 MMBtu/hr (nominal)	Existing/New	None
E-3	E-3	Caterpillar G3608 LE DM8606-02	2012	2,370 bhp	Existing – to be removed	Oxidation Catalyzt
E-4	E-4	Caterpillar G3608 LE DM8606-02	2012	2,370 bhp	Existing – to be removed	Oxidation Catalyzt
E-5	E-5	Caterpillar 3606	2013	1,775 bhp	Existing – to be removed	Oxidation Catalyvs
ELEC-1	None	Electric Compressors #1	2015	4,500 HP	New	None
ELEC-2	None	Electric Compressors # 2	2015	4,500 HP	New	None
ELEC-3	None	Electric Compressors #3	2015	4,500 HP	New	None

<sup>1</sup> For Emission Units (or Sources) use the following numbering system: 1S, 2S, 3S,... or other appropriate designation.

<sup>2</sup> For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation.

<sup>3</sup> New, modification, removal

<sup>4</sup> For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

**ATTACHMENT J**

**Emission Points Data Summary Sheet**

# Attachment J

## EMISSION POINTS DATA SUMMARY SHEET

Table 1: Emissions Data

Emission Point ID No. (Must match Emission Units Table & Plot Plan)	Emission Point Type <sup>1</sup>	Emission Unit Vented Through This Point (Must match Emission Units Table & Plot Plan)		Air Pollution Control Device (Must match Emission Units Table & Plot Plan)		Vent Time for Emission Unit (chemical processes only)		All Regulated Pollutants - Chemical Name/CAS <sup>3</sup> (Speciate VOCs & HAPS)	Maximum Potential Uncontrolled Emissions <sup>4</sup>		Maximum Potential Controlled Emissions <sup>5</sup>		Emission Form or Phase (At exit conditions, Solid, Liquid or Gas/Vapor)	Est. Method Used <sup>6</sup>	Emission Concentration <sup>7</sup> (ppmv or mg/m <sup>3</sup> )
		ID No.	Source	ID No.	Device Type	Short Term <sup>2</sup>	Max (hr/yr)		lb/hr	ton/yr	lb/hr	ton/yr			
FL-1	Upward Vertical Stack	DEHY-1	Dehydration Unit (Emissions only)	FL-1	Ground flare	NA	NA	VOC HAP CO2e	56.06 7.74 909	245.56 33.88 3,983	1.12 0.15 20.28	4.91 0.68 88.77	Gas/Vapor	O <sup>B</sup>	
FL-2	Upward Vertical Stack	DEHY-2	Dehydration Unit (Emissions only)	FL-2	Ground flare	NA	NA	VOC HAP CO2e	56.06 7.74 909	245.56 33.88 3,983	1.12 0.15 20.28	4.91 0.68 88.77	Gas/Vapor	O <sup>B</sup>	
FL-3	Upward Vertical Stack	DEHY-3	Dehydration Unit (Emissions only)	FL-3	Enclosed Combustor	NA	NA	VOC HAP CO2e	56.06 7.74 909	245.56 33.88 3,983	1.12 0.15 20.28	4.91 0.68 88.77	Gas/Vapor	O <sup>B</sup>	
BLR-4	Upward Vertical Stack	BLR-4	Reboiler	NA	NA	NA	NA	NOx CO PM/PM10/PM2.5 SO2 VOC CO2e	0.23 0.20 0.02 0.001 0.01 335	1.02 0.85 0.08 0.006 0.06 1,467	0.23 0.20 0.02 0.001 0.01 335	1.02 0.85 0.08 0.006 0.06 1,467	Gas/Vapor	O <sup>C</sup> O <sup>C</sup> O <sup>C</sup> O <sup>C</sup> O <sup>C</sup> O <sup>A</sup>	
FL-3	Upward Vertical Stack	FL-3	Enclosed Ground Combustor	NA	NA	NA	NA	NOx CO PM/PM10/PM2.5 SO2 CO2e	0.52 0.43 0.04 0.003 744	2.26 1.90 0.17 0.01 3,257	0.52 0.43 0.04 0.003 744	2.26 1.90 0.17 0.01 3,257	Gas/Vapor	O <sup>C</sup> O <sup>C</sup> O <sup>C</sup> O <sup>C</sup> O <sup>A</sup>	

A- 40 CFR 98, Subpart C for natural gas fired combustion.

B- GRI-GLYCalc

C- AP Section 1.4 Tables 1.4-1, 1.4-2 and 1.4-3, July 1998.

The EMISSION POINTS DATA SUMMARY SHEET provides a summation of emissions by emission unit. Note that uncaptured process emission unit emissions are not typically considered to be fugitive and must be accounted for on the appropriate EMISSIONS UNIT DATA SHEET and on the EMISSION POINTS DATA SUMMARY SHEET. Please note that total emissions from the source are equal to all vented emissions, all fugitive emissions, plus all other emissions (e.g. uncaptured emissions). Please complete the FUGITIVE EMISSIONS DATA SUMMARY SHEET for fugitive emission activities.

<sup>1</sup> Please add descriptors such as upward vertical stack, downward vertical stack, horizontal stack, relief vent, rain cap, etc.

- 2 Indicate by "C" if venting is continuous. Otherwise, specify the average short-term venting rate with units, for intermittent venting (ie., 15 min/hr). Indicate as many rates as needed to clarify frequency of venting (e.g., 5 min/day, 2 days/wk).
- 3 List all regulated air pollutants. Speciate VOCs, including all HAPs. Follow chemical name with Chemical Abstracts Service (CAS) number. LIST Acids, CO, CS<sub>2</sub>, VOCs, H<sub>2</sub>S, Inorganics, Lead, Organics, O<sub>3</sub>, NO, NO<sub>2</sub>, SO<sub>2</sub>, SO<sub>3</sub>, all applicable Greenhouse Gases (including CO<sub>2</sub> and methane), etc. DO NOT LIST H<sub>2</sub>, H<sub>2</sub>O, N<sub>2</sub>, O<sub>2</sub>, and Noble Gases.
- 4 Give maximum potential emission rate with no control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).
- 5 Give maximum potential emission rate with proposed control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).
- 6 Indicate method used to determine emission rate as follows: MB = material balance; ST = stack test (give date of test); EE = engineering estimate; O = other (specify).
- 7 Provide for all pollutant emissions. Typically, the units of parts per million by volume (ppmv) are used. If the emission is a mineral acid (sulfuric, nitric, hydrochloric or phosphoric) use units of milligram per dry cubic meter (mg/m<sup>3</sup>) at standard conditions (68 °F and 29.92 inches Hg) (see 45CSR7). If the pollutant is SO<sub>2</sub>, use units of ppmv (See 45CSR10).



**ATTACHMENT K**

**Fugitive Emissions Data Summary Sheet**

## Attachment K

### FUGITIVE EMISSIONS DATA SUMMARY SHEET

The FUGITIVE EMISSIONS SUMMARY SHEET provides a summation of fugitive emissions. Fugitive emissions are those emissions which could not reasonably pass through a stack, chimney, vent or other functionally equivalent opening. Note that uncaptured process emissions are not typically considered to be fugitive, and must be accounted for on the appropriate EMISSIONS UNIT DATA SHEET and on the EMISSION POINTS DATA SUMMARY SHEET.

Please note that total emissions from the source are equal to all vented emissions, all fugitive emissions, plus all other emissions (e.g. uncaptured emissions).

APPLICATION FORMS CHECKLIST - FUGITIVE EMISSIONS
1.) Will there be haul road activities? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> If YES, then complete the HAUL ROAD EMISSIONS UNIT DATA SHEET.
2.) Will there be Storage Piles? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> If YES, complete Table 1 of the NONMETALLIC MINERALS PROCESSING EMISSIONS UNIT DATA SHEET.
3.) Will there be Liquid Loading/Unloading Operations? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> If YES, complete the BULK LIQUID TRANSFER OPERATIONS EMISSIONS UNIT DATA SHEET.
4.) Will there be emissions of air pollutants from Wastewater Treatment Evaporation? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> If YES, complete the GENERAL EMISSIONS UNIT DATA SHEET.
5.) Will there be Equipment Leaks (e.g. leaks from pumps, compressors, in-line process valves, pressure relief devices, open-ended valves, sampling connections, flanges, agitators, cooling towers, etc.)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <input type="checkbox"/> If YES, complete the LEAK SOURCE DATA SHEET section of the CHEMICAL PROCESSES EMISSIONS UNIT DATA SHEET.
6.) Will there be General Clean-up VOC Operations? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> If YES, complete the GENERAL EMISSIONS UNIT DATA SHEET.
7.) Will there be any other activities that generate fugitive emissions? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> If YES, complete the GENERAL EMISSIONS UNIT DATA SHEET or the most appropriate form.
If you answered "NO" to all of the items above, it is not necessary to complete the following table, "Fugitive Emissions Summary."

FUGITIVE EMISSIONS SUMMARY		All Regulated Pollutants - Chemical Name/CAS <sup>1</sup>	Maximum Potential Uncontrolled Emissions <sup>2</sup>		Maximum Potential Controlled Emissions <sup>3</sup>		Est. Method Used <sup>4</sup>
			lb/hr	ton/yr	lb/hr	ton/yr	
Haul Road/Road Dust Emissions Paved Haul Roads	NA	--	--	--	--	--	--
Unpaved Haul Roads	NA	--	--	--	--	--	--
Storage Pile Emissions	NA	--	--	--	--	--	--
Loading/Unloading Operations	NA	N/A	--	--	--	--	--
Wastewater Treatment Evaporation & Operations	NA	--	--	--	--	--	--
Equipment Leaks	VOC HAP	N/A	10.78 3.96	N/A	10.78 3.96	N/A	O <sup>A</sup>
General Clean-up VOC Emissions	NA	--	--	--	--	--	--
Other	NA	--	--	--	--	--	--

A - Protocol for Equipment Leak Emission Estimates, EPA 453/R-95-017, November 1995. Current HAP PTE is retained.

<sup>1</sup> List all regulated air pollutants. Speciate VOCs, including all HAPs. Follow chemical name with Chemical Abstracts Service (CAS) number. LIST Acids, CO, CS<sub>2</sub>, VOCs, H<sub>2</sub>S, Inorganics, Lead, Organics, O<sub>3</sub>, NO, NO<sub>2</sub>, SO<sub>2</sub>, SO<sub>3</sub>, all applicable Greenhouse Gases (including CO<sub>2</sub> and methane), etc. DO NOT LIST H<sub>2</sub>, H<sub>2</sub>O, N<sub>2</sub>, O<sub>2</sub>, and Noble Gases.

<sup>2</sup> Give rate with no control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>3</sup> Give rate with proposed control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>4</sup> Indicate method used to determine emission rate as follows: MB = material balance; ST = stack test (give date of test); EE = engineering estimate; O = other (specify).

**ATTACHMENT L**

**Emission Unit Data Sheet**

**Attachment L**  
**EMISSIONS UNIT DATA SHEET**  
**GENERAL**

To be used for affected sources other than asphalt plants, foundries, incinerators, indirect heat exchangers, and quarries.

Identification Number (as assigned on *Equipment List Form*): DEHY-1, DEHY-2, **DEHY-3**

<p>1. Name or type and model of proposed affected source:</p> <p>200 MMSCFD dehydration units with 2.86 MMbtu/hr duty (Heat Input rated) reboiler</p>
<p>2. On a separate sheet(s), furnish a sketch(es) of this affected source. If a modification is to be made to this source, clearly indicated the change(s). Provide a narrative description of all features of the affected source which may affect the production of air pollutants.</p>
<p>3. Name(s) and maximum amount of proposed process material(s) charged per hour:</p> <p>200 million standard cubic feet per day of natural gas, each</p>
<p>4. Name(s) and maximum amount of proposed material(s) produced per hour:</p> <p>Does not produce a material – removes water from wet natural gas</p>
<p>5. Give chemical reactions, if applicable, that will be involved in the generation of air pollutants:</p> <p>External combustion of natural gas in reboiler</p>

\* The identification number which appears here must correspond to the air pollution control device identification number appearing on the *List Form*.

6. Combustion Data (if applicable):					
(a) Type and amount in appropriate units of fuel(s) to be burned:					
Reboiler - Natural gas – 2,322 scf/hr 20.35 MMscf/yr (Assumes 1231 Btu/scf)					
(b) Chemical analysis of proposed fuel(s), excluding coal, including maximum percent sulfur and ash:					
Natural gas					
(c) Theoretical combustion air requirement (ACF/unit of fuel):					
Unknown	@	°F and psia.			
(d) Percent excess air: Unknown					
(e) Type and BTU/hr of burners and all other firing equipment planned to be used:					
natural gas fired external combustion heater – 2.86 MMbtu/hr input rating					
(f) If coal is proposed as a source of fuel, identify supplier and seams and give sizing of the coal as it will be fired:					
NA					
(g) Proposed maximum design heat input:					
	2.36	× 10 <sup>6</sup> BTU/hr.			
7. Projected operating schedule:					
Hours/Day	24	Days/Week	7	Weeks/Year	52

8. Projected amount of pollutants that would be emitted from this affected source if no control devices were used:			
@	Unknown	°F and	psia
a. NO <sub>x</sub>	0.23	lb/hr	grains/ACF
b. SO <sub>2</sub>	0.001	lb/hr	grains/ACF
c. CO	0.20	lb/hr	grains/ACF
d. PM <sub>10</sub>	0.02	lb/hr	grains/ACF
e. Hydrocarbons	0.01	lb/hr	grains/ACF
f. VOCs	56.06	lb/hr	grains/ACF
g. Pb		lb/hr	grains/ACF
h. Specify other(s)			
HAP	33.88	lb/hr	grains/ACF
		lb/hr	grains/ACF
		lb/hr	grains/ACF
		lb/hr	grains/ACF

NOTE: (1) An Air Pollution Control Device Sheet must be completed for any air pollution device(s) used to control emissions from this affected source.

(2) Complete the Emission Points Data Sheet.

9. Proposed Monitoring, Recordkeeping, Reporting, and Testing  
 Please propose monitoring, recordkeeping, and reporting in order to demonstrate compliance with the proposed operating parameters. Please propose testing in order to demonstrate compliance with the proposed emissions limits.

**MONITORING**

Throughput of wet natural gas.  
 Operating parameters of dehydration unit for GLYCalc  
 (temperature, pressure, glycol flow rate)

**RECORDKEEPING**

Annual benzene emissions calculated with GLYCalc.

**REPORTING**

None.

**TESTING**

None.

**MONITORING.** PLEASE LIST AND DESCRIBE THE PROCESS PARAMETERS AND RANGES THAT ARE PROPOSED TO BE MONITORED IN ORDER TO DEMONSTRATE COMPLIANCE WITH THE OPERATION OF THIS PROCESS EQUIPMENT OPERATION/AIR POLLUTION CONTROL DEVICE.

**RECORDKEEPING.** PLEASE DESCRIBE THE PROPOSED RECORDKEEPING THAT WILL ACCOMPANY THE MONITORING.

**REPORTING.** PLEASE DESCRIBE THE PROPOSED FREQUENCY OF REPORTING OF THE RECORDKEEPING.

**TESTING.** PLEASE DESCRIBE ANY PROPOSED EMISSIONS TESTING FOR THIS PROCESS EQUIPMENT/AIR POLLUTION CONTROL DEVICE.

10. Describe all operating ranges and maintenance procedures required by Manufacturer to maintain warranty

**ATTACHMENT M**

**Air Pollution Control Device Sheet**





42. Describe the collection material disposal system:

N/A

43. Have you included *Flare Control Device* in the Emissions Points Data Summary Sheet?

**44. Proposed Monitoring, Recordkeeping, Reporting, and Testing**

Please propose monitoring, recordkeeping, and reporting in order to demonstrate compliance with the proposed operating parameters. Please propose testing in order to demonstrate compliance with the proposed emissions limits.

**MONITORING:**

Presence of pilot (temperature)

**RECORDKEEPING:**

Maintain records of the presence of when the pilot flame in the flare is not detected including date, time and duration of event.

**REPORTING:**

None

**TESTING:**

None

**MONITORING:**

Please list and describe the process parameters and ranges that are proposed to be monitored in order to demonstrate compliance with the operation of this process equipment or air control device.

**RECORDKEEPING:**

Please describe the proposed recordkeeping that will accompany the monitoring.

**REPORTING:**

Please describe any proposed emissions testing for this process equipment on air pollution control device.

**TESTING:**

Please describe any proposed emissions testing for this process equipment on air pollution control device.

**45. Manufacturer's Guaranteed Capture Efficiency for each air pollutant.**

VOC – 100%

HAP – 100%

**46. Manufacturer's Guaranteed Control Efficiency for each air pollutant.**

VOC – 98%

HAP – 98%

**47. Describe all operating ranges and maintenance procedures required by Manufacturer to maintain warranty.**

**ATTACHMENT N**

**Supporting Emission Calculations**

**CONE Midstream Partners, LP - Majorsville Station  
Facility-Wide Emissions Summary**

Emissions Unit ID	Majorsville Station										Majorsville Station Post Project TOTAL
	Majorsville Station Current FTE	Station Fugitives - Old	Caterpillar 3608 Compressor Engine - Removed	Caterpillar 3606 Compressor Engine - Removed	Dehydration Unit	Station Fugitives - Updated	Reboiler				
Equipment Status	ALL	FUG	E4	E5	DEHY-1, DEHY-2, DEHY-3 & FL-3	FUG	BLR-4				
Capacity	Existing	Existing	Existing	Existing	New	New	New				
Unit	N/A	ALL	2,730	1,775	200	ALL	2.86				
# of Emission Units	N/A	N/A	HP	HP	MMSCFD	N/A	MMBtu/hr				
	ALL	N/A	1	1	3	N/A	1				
Pollutant	tpy	tpy	tpy	tpy	tpy	tpy	tpy	tpy	tpy	lb/hr	tpy
PM <sub>10</sub>	3.82	---	0.69	0.56	0.51	---	0.08	0.72	3.2		
PM <sub>2.5</sub>	3.82	---	0.69	0.56	0.51	---	0.08	0.72	3.2		
SO <sub>x</sub>	0.25	---	0.04	0.03	0.04	---	0.01	0.05	0.2		
CO	40.29	---	4.40	3.30	5.69	---	0.85	8.94	39.1		
NO <sub>x</sub>	64.48	---	11.44	8.56	6.78	---	1.02	11.93	53.3		
VOC	92.39	8.64	7.21	5.39	14.73	10.78	0.06	22.08	96.7		
CO <sub>2</sub> e	52,963	273	8,078	6,216	10,039	261	1,467	11,453	59,163		
Formaldehyde	6.52	---	0.96	0.72	---	---	0.001	1.11	4.8		
Total HAPs	21.46	3.96	2.81	2.15	0.68	3.96	0.02	3.93	17.2		

**Dehydration Unit & Combustor Emissions (DEHY-1, DEHY-2, DEHY-3 & FL-3)**

GRI-GLYCalc Version 4.0 - EMISSIONS SUMMARY				
Controlled Regenerator Emissions				
Pollutant	(lb/hr)	(lb/day)	(tons/yr)	
Carbon dioxide	1.0400	24.96	4.555	
Methane	0.0456	1.09	0.200	
Ethane	0.1282	3.08	0.562	
Propane	0.1605	3.85	0.703	
Isobutane	0.0435	1.04	0.191	
n-Butane	0.1185	2.84	0.519	
Isopentane	0.0542	0.82	0.150	
n-Pentane	0.0580	1.39	0.254	
Cyclohexane	0.0070	0.17	0.031	
n-Hexane*	0.0220	0.53	0.096	
Cyclohexane	0.0107	0.26	0.047	
Other Hexanes	0.0075	0.18	0.033	
Heptanes	0.0168	0.40	0.074	
Methylcyclohexane*	0.0194	0.47	0.085	
Benzene*	0.0181	0.43	0.079	
Toluene*	0.0552	1.32	0.242	
Xylenes*	0.0530	1.27	0.232	
C8+ Heavier Hydrocarbons	0.0503	0.73	0.133	
Total Emissions	0.8285	19.88	3.629	
Total Hydrocarbon Emissions	0.8285	19.88	3.629	
Total VOC Emissions	0.6547	15.71	2.868	
Total HAP Emissions	0.1485	3.56	0.650	

GRI-GLYCalc Version 4.0 - EMISSIONS SUMMARY				
Flueh Gas Emissions				
Pollutant	(lb/hr)	(lb/day)	(tons/yr)	
Carbon dioxide	1.0400	24.96	4.555	
Methane	0.6819	16.37	2.987	
Ethane	0.5316	12.76	2.328	
Propane	0.2640	6.34	1.156	
Isobutane	0.0453	1.09	0.198	
n-Butane	0.0911	2.19	0.399	
Isopentane	0.0223	0.54	0.098	
n-Pentane	0.0294	0.71	0.129	
Cyclohexane	0.0010	0.02	0.004	
n-Hexane*	0.0059	0.14	0.026	
Cyclohexane	0.0008	0.02	0.004	
Other Hexanes	0.0027	0.06	0.012	
Heptanes	0.0021	0.05	0.009	
Methylcyclohexane*	0.0010	0.02	0.004	
Benzene*	0.0001	0.00	0.000	
Toluene*	0.0003	0.01	0.001	
Xylenes*	0.0001	0.00	0.000	
C8+ Heavier Hydrocarbons	0.0004	0.01	0.002	
Total Emissions	1.6801	40.32	7.359	
Total Hydrocarbon Emissions	1.6801	40.32	7.359	
Total VOC Emissions	0.4666	11.198	2.044	
Total HAP Emissions	0.0064	0.15	0.028	

**Dehydration Unit & Combustor Emissions (DEHY-1, DEHY-2, DEHY-3 & FL-3)**

GRI-GLYCalc Version 4.0 - EMISSIONS SUMMARY <sup>1</sup>				
Combined Regenerator and Flash Gas Emissions <sup>2</sup>				
Pollutant	(lb/hr)	(lb/day)	(ton/yr)	
Carbon dioxide	2.0800	49.9200	9.1104	
Methane	0.7275	17.4600	3.1865	
Ethane	0.6598	15.8352	2.8899	
Propane	0.4245	10.1880	1.8593	
Isobutane	0.0888	2.1312	0.3889	
n-Butane	0.2096	5.0304	0.9180	
Isopentane	0.0565	1.3560	0.2475	
n-Pentane	0.0874	2.0976	0.3828	
Cyclopentane	0.0080	0.1920	0.0350	
n-Hexane*	0.0279	0.6696	0.1222	
Cyclohexane	0.0115	0.2760	0.0504	
Other Hexanes	0.0102	0.2448	0.0447	
Heptane	0.0189	0.4536	0.0828	
Methylcyclohexane*	0.0204	0.4896	0.0894	
Benzene*	0.0182	0.4368	0.0797	
Toluene*	0.0555	1.3320	0.2431	
Xylenes*	0.0531	1.2744	0.2326	
C8+ Heavier Hydrocarbons	0.0307	0.7368	0.1345	
Total Emissions	2.5086	60.2064	10.9877	
Total Hydrocarbon Emissions	2.5086	60.2064	10.9877	
Total VOC Emissions	1.1213	26.9112	4.9113	
Total HAP Emissions	0.1547	3.7128	0.6776	

\*HAPs

<sup>1</sup> Based on GRI GLYCalc 4.0 run at dry gas flowrate of 200 MMSCFD and T and P of 115°F and 1000 psig, respectively. Still and flash tank emissions are controlled by the enclosed combustor at a destruction efficiency of 98%.

**Enclosed Combustor (FL-3) Emission Calculations:**

Combustor Rating: 6.0 MMbtu/hr  
 Pilot Rating: 0.35 MMbtu/hr  
 Higher Heating Value (HHV): 1,231 Btu/scf

Pollutant	Emission Factor <sup>a</sup> (lb/MMBtu)	Combustor Potential Emissions (lb/hr)	Pilot Potential Emissions (lb/hr)
NO <sub>x</sub>	0.081	0.487	2.134
CO	0.068	0.409	1.793
PM/PM <sub>10</sub>	0.006	0.037	0.162
SO <sub>2</sub>	0.000	0.003	0.013
CO <sub>2</sub> (Natural Gas Firing)	116.997	701.984	3074.689
CH <sub>4</sub> (Natural Gas Firing)	0.002	0.013	0.058
N <sub>2</sub> O* (Natural Gas Firing)	0.000	0.001	0.006

<sup>a</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, 1.4-3 & 1.4-4.

<sup>b</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

**Reboiler**

<b>Source Designation:</b>	
Manufacturer:	TBD
Year Installed:	TBD
Fuel Used:	Natural Gas
Higher Heating Value (HHV) (Btu/sec):	1,231
Heat Input (MMBtu/hr)	2.86
Fuel Consumption (MMscf/hr):	2.32E-03
Potential Annual Hours of Operation (hr/yr):	8,760

**Criteria and Manufacturer Specific Pollutant Emission Rates:**

Pollutant	Emission Factor (lb/MMscf) <sup>a</sup>	(lb/hr) <sup>b</sup>	Potential Emissions (tons/yr) <sup>c</sup>
NO <sub>x</sub>	100	0.23	1.02
CO	84	0.20	0.85
SO <sub>2</sub>	0.6	0.001	0.006
PM Total	7.6	0.02	0.08
PM Condensable	5.7	0.01	0.06
PM <sub>10</sub> (Filterable)	1.9	0.00	0.02
PM <sub>2.5</sub> (Filterable)	1.9	0.00	0.02
VOC	5.5	0.01	0.06
CO <sub>2</sub> <sup>d</sup> (Natural Gas Firing)	144,065	334.61	1465.60
CH <sub>4</sub> <sup>d</sup> (Natural Gas Firing)	2.7	0.01	0.03
N <sub>2</sub> O <sup>d</sup> (Natural Gas Firing)	0.27	0.00	0.00

**Hazardous Air Pollutant (HAP) Potential Emissions:**

Pollutant	Emission Factor (lb/MMscf) <sup>a</sup>	Potential Emissions	
		(lb/hr) <sup>b</sup>	(tons/yr) <sup>c</sup>
<b>HAPs:</b>			
3-Methylchloranthrene	1.8E-06	4.18E-09	1.83E-08
7,12-Dimethylbenz(a)anthracene	1.6E-05	3.72E-08	1.63E-07
Acenaphthene	1.8E-06	4.18E-09	1.83E-08
Acenaphthylene	1.8E-06	4.18E-09	1.83E-08
Anthracene	2.4E-06	5.57E-09	2.44E-08
Benzo(a)anthracene	1.8E-06	4.18E-09	1.83E-08
Benzene	2.1E-03	4.88E-06	2.14E-05
Benzo(a)pyrene	1.2E-06	2.79E-09	1.22E-08
Benzo(b)fluoranthene	1.8E-06	4.18E-09	1.83E-08
Benzo(g,h,i)perylene	1.2E-06	2.79E-09	1.22E-08
Benzo(k)fluoranthene	1.8E-06	4.18E-09	1.83E-08
Chrysene	1.8E-06	4.18E-09	1.83E-08
Dibenzo(a,h)anthracene	1.2E-06	2.79E-09	1.22E-08
Dichlorobenzene	1.2E-03	2.79E-06	1.22E-05
Fluoranthene	3.0E-06	6.97E-09	3.05E-08
Fluorene	2.8E-06	6.50E-09	2.85E-08
Formaldehyde	7.5E-02	1.74E-04	7.63E-04
Hexane	1.8E+00	4.18E-03	1.83E-02
Indo(1,2,3-cd)pyrene	1.8E-06	4.18E-09	1.83E-08
Phenanthrene	1.7E-05	3.95E-08	1.73E-07
Pyrene	5.0E-06	1.16E-08	5.09E-08
Toluene	3.4E-03	7.90E-06	3.46E-05
Arsenic	2.0E-04	4.65E-07	2.03E-06
Beryllium	1.2E-05	2.79E-08	1.22E-07
Cadmium	1.1E-03	2.55E-06	1.12E-05
Chromium	1.4E-03	3.25E-06	1.42E-05
Cobalt	8.4E-05	1.95E-07	8.55E-07
Lead	5.0E-04	1.16E-06	5.09E-06
Manganese	3.8E-04	8.83E-07	3.87E-06
Mercury	2.6E-04	6.04E-07	2.65E-06
Nickel	2.1E-03	4.88E-06	2.14E-05
Selenium	2.4E-05	5.57E-08	2.44E-07
<b>Polycyclic Organic Matter:</b>			
Methylnaphthalene (2-)	2.4E-05	5.57E-08	2.44E-07
Naphthalene	6.1E-04	1.42E-06	6.21E-06
<b>Total HAP</b>		<b>4.39E-03</b>	<b>1.92E-02</b>

<sup>a</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, 1.4-3 & 1.4-4.

<sup>b</sup> Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf).

<sup>c</sup> Annual Emissions (tons/yr)<sup>Potential</sup> = (lb/hr)<sup>Potential</sup> × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

## Fugitives

### VOC Fugitive Emissions from Component Leaks

Equipment Type	Service	Emission Factor <sup>1</sup> (kg/hr-source)	Facility Equipment Count <sup>2</sup> (units)	Fraction VOC <sup>3</sup>	Hourly Fugitive VOC Emissions (lb/hr)	Annual Fugitive VOC Emissions (tpy)	Fraction VOC <sup>3</sup>	Hourly Fugitive HAP Emissions (lb/hr)	Annual Fugitive HAP Emissions (tpy)
Valves	Gas	0.0060	2281	0.06	1.87	8.20	0.00	0.02	0.07
Compressor Seals/Other	Gas	0.0088	17	0.06	0.02	0.09	0.00	0.00	0.00
Open ended Lines	Gas	0.0017	34	0.06	0.01	0.03	0.00	0.00	0.00
Connectors	Gas	0.00183	2233	0.06	0.56	2.46	0.00	0.19	0.83
<b>Emission Totals:</b>					<b>2.46</b>	<b>10.78</b>		<b>0.21</b>	<b>0.91</b>

<sup>1</sup> U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1 for all types except compressors/other, which are from Table 2.1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995).

<sup>2</sup> Assumes 10% increase in existing count. Assumes two OEL per "other equipment."

<sup>3</sup> Based on gas analysis sample. HAP emissions will retain existing permit limits.

### GHG Fugitive Emissions from Component Leaks

Component	Component Count <sup>1</sup>	GHG Emission Factor <sup>2</sup> (kg/hr/component)	CH <sub>4</sub> Emissions <sup>3,4</sup> (tpy)	CO <sub>2</sub> Emissions <sup>3,4</sup> (tpy)	CO <sub>2</sub> e Emissions <sup>5</sup> (tpy)
Valves	2,281	0.027	9.05	0.04	226.34
Compressor Seals/Other	17	0.040	0.10	0.00	2.50
Open ended Lines	34	0.061	0.30	0.00	7.62
Connectors	2,233	0.003	0.98	0.00	24.62
<b>Total</b>			<b>10.44</b>	<b>0.05</b>	<b>261</b>

<sup>1</sup> The component count for pneumatics is estimated based on component counts at similar facilities.

<sup>2</sup> Population emission factors for gas service in the Eastern U.S. from *Table W-1A of Subpart W - Default Whole Gas Emission Factors for Onshore Production*, 40 CFR 98, Subpart W, except for pneumatics, which are set at NSPS OOOO limits.

<sup>3</sup> Calculated in accordance with Equations W-31, W-35 and W-36 in Subpart W of 40 CFR 98.

<sup>4</sup> Fractions of CH<sub>4</sub> and CO<sub>2</sub> based on gas analysis:

CH<sub>4</sub>: 0.793      CO<sub>2</sub>: 0.001

Carbon Dioxide (CO<sub>2</sub>): 1

Methane (CH<sub>4</sub>): 25

<sup>5</sup> Carbon equivalent emissions (CO<sub>2</sub>e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98:

## Gas Analysis

Higher Heating Value      1,231 btu/scf

Constituent	Concentration (Vol %)	Molecular Weight	Molar Weight	Average Weight Fraction	Natural Gas Stream Speciation (Wt. %)
Carbon Dioxide	0.1390%	44.01	0.06	0.00	0.30
Nitrogen	0.3490%	14.01	0.05	0.00	0.24
Methane	79.2756%	16.04	12.72	0.63	62.99
Ethane	13.9757%	30.07	4.20	0.21	20.82
Propane	4.1061%	44.10	1.81	0.09	8.97
Isobutane	0.5241%	58.12	0.30	0.02	1.51
n-Butane	0.9673%	58.12	0.56	0.03	2.78
Isopentane	0.2300%	72.15	0.17	0.01	0.82
n-Pentane	0.2824%	72.15	0.20	0.01	1.01
Cyclopentane	0.0064%	70.1	0.00	0.00	0.02
n-Hexane*	0.0526%	86.18	0.05	0.00	0.22
Cyclohexane	0.0050%	84.16	0.00	0.00	0.02
Other Hexanes	0.0245%	86.18	0.02	0.00	0.10
Heptanes	0.0189%	100.20	0.02	0.00	0.09
Methylcyclohexane	0.0077%	98.19	0.01	0.00	0.04
2,2,4-Trimethylpentane*	0.0000%	114.23	0.00	0.00	0.00
Benzene*	0.0010%	78.11	0.00	0.00	0.00
Toluene*	0.0020%	92.14	0.00	0.00	0.01
Ethylbenzene*	0.0000%	106.17	0.00	0.00	0.00

\*HAPs

TOC (Total)	99.49%	99.45
VOC (Total)	6.24%	15.65
HAP (Total)	0.06%	0.24

## GRI-GLYCalc VERSION 4.0 - SUMMARY OF INPUT VALUES

Case Name: 2015 Majorsville  
 File Name: Z:\Client\CONSOL\Corporate\153901.0019 Majorsville R-13\03  
 Deliverables\20150312 Draft Majorsville Application\Attachment N - Emission  
 Calculations\20150213 Majorsville Dehy v1.ddf  
 Date: March 12, 2015

## DESCRIPTION:

-----  
 Description: 200 MMSCFD DEHY UNIT  
 DEHY-3

Annual Hours of Operation: 8760.0 hours/yr

## WET GAS:

-----  
 Temperature: 115.00 deg. F  
 Pressure: 1000.00 psig  
 Wet Gas Water Content: Saturated

Component	Conc. (vol %)
Carbon Dioxide	0.1390
Nitrogen	0.3490
Methane	79.2756
Ethane	13.9757
Propane	4.1061
Isobutane	0.5241
n-Butane	0.9673
Isopentane	0.2300
n-Pentane	0.2824
Cyclopentane	0.0064
n-Hexane	0.0526
Cyclohexane	0.0050
Other Hexanes	0.0245
Heptanes	0.0189
Methylcyclohexane	0.0077
Benzene	0.0010
Toluene	0.0020
Xylenes	0.0010
C8+ Heavies	0.0062

## DRY GAS:

-----  
 Flow Rate: 200.0 MMSCF/day  
 Water Content: 7.0 lbs. H2O/MMSCF

## LEAN GLYCOL:

-----  
 Glycol Type: TEG  
 Water Content: 1.5 wt% H2O  
 Flow Rate: 25.0 gpm

## PUMP:

-----

Glycol Pump Type: Electric/Pneumatic

FLASH TANK:

---

Flash Control: Combustion device  
Flash Control Efficiency: 98.00 %  
Temperature: 100.0 deg. F  
Pressure: 62.0 psig

REGENERATOR OVERHEADS CONTROL DEVICE:

---

Control Device: Combustion Device  
Destruction Efficiency: 98.0 %  
Excess Oxygen: 2.0 %  
Ambient Air Temperature: 70.0 deg. F

## GRI-GLYCalc VERSION 4.0 - AGGREGATE CALCULATIONS REPORT

Case Name: 2015 Majorsville

File Name: Z:\Client\CONSOL\Corporate\153901.0019 Majorsville R-13\04 Draft\Attachment N  
- Emission Calculations\20150213 Majorsville Dehy v1.ddf

Date: March 02, 2015

## DESCRIPTION:

Description: 200 MMSCFD DEHY UNIT  
DEHY-3

Annual Hours of Operation: 8760.0 hours/yr

## EMISSIONS REPORTS:

## CONTROLLED REGENERATOR EMISSIONS

Component	lbs/hr	lbs/day	tons/yr
Methane	0.0456	1.095	0.1998
Ethane	0.1282	3.078	0.5617
Propane	0.1605	3.852	0.7030
Isobutane	0.0435	1.045	0.1907
n-Butane	0.1185	2.844	0.5191
Isopentane	0.0342	0.822	0.1500
n-Pentane	0.0580	1.391	0.2538
Cyclopentane	0.0070	0.169	0.0308
n-Hexane	0.0220	0.528	0.0964
Cyclohexane	0.0107	0.256	0.0467
Other Hexanes	0.0075	0.181	0.0329
Heptanes	0.0168	0.402	0.0734
Methylcyclohexane	0.0194	0.465	0.0849
Benzene	0.0181	0.435	0.0794
Toluene	0.0552	1.324	0.2416
Xylenes	0.0530	1.272	0.2322
C8+ Heavies	0.0303	0.726	0.1325
Total Emissions	0.8285	19.885	3.6290
Total Hydrocarbon Emissions	0.8285	19.885	3.6290
Total VOC Emissions	0.6547	15.713	2.8676
Total HAP Emissions	0.1483	3.559	0.6496
Total BTEX Emissions	0.1263	3.031	0.5532

## UNCONTROLLED REGENERATOR EMISSIONS

Component	lbs/hr	lbs/day	tons/yr
Methane	2.2803	54.727	9.9877
Ethane	6.4116	153.880	28.0830
Propane	8.0250	192.601	35.1497
Isobutane	2.1771	52.249	9.5355
n-Butane	5.9259	142.222	25.9556
Isopentane	1.7124	41.096	7.5001
n-Pentane	2.8978	69.547	12.6924
Cyclopentane	0.3517	8.441	1.5405
n-Hexane	1.1002	26.405	4.8189
Cyclohexane	0.5335	12.803	2.3365

Other Hexanes	0.3760	9.025	1.6471
Heptanes	0.8380	20.111	3.6703
Methylcyclohexane	0.9690	23.255	4.2441
Benzene	0.9068	21.762	3.9716
Toluene	2.7580	66.191	12.0799
Xylenes	2.6504	63.610	11.6088
C8+ Heavies	1.5131	36.314	6.6272
-----			
Total Emissions	41.4267	994.241	181.4489
Total Hydrocarbon Emissions	41.4267	994.241	181.4489
Total VOC Emissions	32.7348	785.634	143.3782
Total HAP Emissions	7.4154	177.968	32.4792
Total BTEX Emissions	6.3151	151.563	27.6603

## FLASH GAS EMISSIONS

Component	lbs/hr	lbs/day	tons/yr
Methane	0.6819	16.365	2.9867
Ethane	0.5316	12.759	2.3285
Propane	0.2640	6.335	1.1562
Isobutane	0.0453	1.088	0.1985
n-Butane	0.0911	2.188	0.3992
Isopentane	0.0223	0.535	0.0977
n-Pentane	0.0294	0.705	0.1287
Cyclopentane	0.0010	0.024	0.0043
n-Hexane	0.0059	0.142	0.0259
Cyclohexane	0.0008	0.018	0.0034
Other Hexanes	0.0027	0.066	0.0120
Heptanes	0.0021	0.051	0.0093
Methylcyclohexane	0.0010	0.025	0.0045
Benzene	0.0001	0.003	0.0006
Toluene	0.0003	0.006	0.0012
Xylenes	0.0001	0.002	0.0004
C8+ Heavies	0.0004	0.010	0.0018
-----			
Total Emissions	1.6801	40.322	7.3588
Total Hydrocarbon Emissions	1.6801	40.322	7.3588
Total VOC Emissions	0.4666	11.198	2.0436
Total HAP Emissions	0.0064	0.154	0.0281
Total BTEX Emissions	0.0005	0.012	0.0022

## FLASH TANK OFF GAS

Component	lbs/hr	lbs/day	tons/yr
Methane	34.0946	818.272	149.3346
Ethane	26.5813	637.952	116.4262
Propane	13.1984	316.762	57.8091
Isobutane	2.2657	54.376	9.9236
n-Butane	4.5575	109.379	19.9617
Isopentane	1.1152	26.765	4.8846
n-Pentane	1.4688	35.252	6.4334
Cyclopentane	0.0494	1.186	0.2165
n-Hexane	0.2958	7.100	1.2958
Cyclohexane	0.0383	0.920	0.1679
Other Hexanes	0.1369	3.286	0.5996

Heptanes	0.1059	2.541	0.4637
Methylcyclohexane	0.0517	1.241	0.2264
Benzene	0.0070	0.168	0.0307
Toluene	0.0131	0.315	0.0575

Xylenes	0.0046	0.109	0.0199
C8+ Heavies	0.0200	0.481	0.0878

Total Emissions	84.0044	2016.104	367.9391
Total Hydrocarbon Emissions	84.0044	2016.104	367.9391
Total VOC Emissions	23.3284	559.881	102.1783
Total HAP Emissions	0.3205	7.693	1.4039
Total BTEX Emissions	0.0247	0.592	0.1081

## COMBINED REGENERATOR VENT/FLASH GAS EMISSIONS

Component	lbs/hr	lbs/day	tons/yr
Methane	0.7275	17.460	3.1864
Ethane	0.6599	15.837	2.8902
Propane	0.4245	10.187	1.8592
Isobutane	0.0889	2.133	0.3892
n-Butane	0.2097	5.032	0.9183
Isopentane	0.0566	1.357	0.2477
n-Pentane	0.0873	2.096	0.3825
Cyclopentane	0.0080	0.193	0.0351
n-Hexane	0.0279	0.670	0.1223
Cyclohexane	0.0114	0.274	0.0501
Other Hexanes	0.0103	0.246	0.0449
Heptanes	0.0189	0.453	0.0827
Methylcyclohexane	0.0204	0.490	0.0894
Benzene	0.0183	0.439	0.0800
Toluene	0.0554	1.330	0.2427
Xylenes	0.0531	1.274	0.2326
C8+ Heavies	0.0307	0.736	0.1343
Total Emissions	2.5086	60.207	10.9878
Total Hydrocarbon Emissions	2.5086	60.207	10.9878
Total VOC Emissions	1.1213	26.910	4.9111
Total HAP Emissions	0.1547	3.713	0.6777
Total BTEX Emissions	0.1268	3.043	0.5554

## COMBINED REGENERATOR VENT/FLASH GAS EMISSION CONTROL REPORT:

Component	Uncontrolled tons/yr	Controlled tons/yr	% Reduction
Methane	159.3222	3.1864	98.00
Ethane	144.5092	2.8902	98.00
Propane	92.9588	1.8592	98.00
Isobutane	19.4592	0.3892	98.00
n-Butane	45.9172	0.9183	98.00
Isopentane	12.3847	0.2477	98.00
n-Pentane	19.1258	0.3825	98.00
Cyclopentane	1.7571	0.0351	98.00
n-Hexane	6.1147	0.1223	98.00
Cyclohexane	2.5045	0.0501	98.00

Other Hexanes	2.2467	0.0449	98.00
Heptanes	4.1339	0.0827	98.00
Methylcyclohexane	4.4705	0.0894	98.00
Benzene	4.0023	0.0800	98.00
Toluene	12.1374	0.2427	98.00
-----			
Xylenes	11.6288	0.2326	98.00
C8+ Heavies	6.7150	0.1343	98.00
-----			
Total Emissions	549.3880	10.9878	98.00
-----			
Total Hydrocarbon Emissions	549.3880	10.9878	98.00
Total VOC Emissions	245.5565	4.9111	98.00
Total HAP Emissions	33.8831	0.6777	98.00
Total BTEX Emissions	27.7684	0.5554	98.00

## EQUIPMENT REPORTS:

-----  
COMBUSTION DEVICE

Ambient Temperature: 70.00 deg. F  
 Excess Oxygen: 2.00 %  
 Combustion Efficiency: 98.00 %  
 Supplemental Fuel Requirement: 4.30e-001 MM BTU/hr

Component	Emitted	Destroyed
-----		
Methane	2.00%	98.00%
Ethane	2.00%	98.00%
Propane	2.00%	98.00%
Isobutane	2.00%	98.00%
n-Butane	2.00%	98.00%
Isopentane	2.00%	98.00%
n-Pentane	2.00%	98.00%
Cyclopentane	2.00%	98.00%
n-Hexane	2.00%	98.00%
Cyclohexane	2.00%	98.00%
Other Hexanes	2.00%	98.00%
Heptanes	2.00%	98.00%
Methylcyclohexane	2.00%	98.00%
Benzene	2.00%	98.00%
Toluene	2.00%	98.00%
Xylenes	2.00%	98.00%
C8+ Heavies	2.00%	98.00%

-----  
ABSORBER

Calculated Absorber Stages: 1.39  
 Specified Dry Gas Dew Point: 7.00 lbs. H2O/MMSCF  
 Temperature: 115.0 deg. F  
 Pressure: 1000.0 psig  
 Dry Gas Flow Rate: 200.0000 MMSCF/day  
 Glycol Losses with Dry Gas: 7.9240 lb/hr  
 Wet Gas Water Content: Saturated  
 Calculated Wet Gas Water Content: 88.97 lbs. H2O/MMSCF  
 Calculated Lean Glycol Recirc. Ratio: 2.20 gal/lb H2O

Component	Remaining in Dry Gas	Absorbed in Glycol
Water	7.85%	92.15%
Carbon Dioxide	99.84%	0.16%
Nitrogen	99.99%	0.01%
Methane	99.99%	0.01%
Ethane	99.96%	0.04%
Propane	99.95%	0.05%
Isobutane	99.93%	0.07%
n-Butane	99.92%	0.08%
Isopentane	99.92%	0.08%
n-Pentane	99.90%	0.10%
Cyclopentane	99.59%	0.41%
n-Hexane	99.86%	0.14%
Cyclohexane	99.38%	0.62%
Other Hexanes	99.89%	0.11%
Heptanes	99.77%	0.23%
Methylcyclohexane	99.39%	0.61%
Benzene	94.68%	5.32%
Toluene	93.16%	6.84%
Xylenes	88.61%	11.39%
C8+ Heavies	99.34%	0.66%

## FLASH TANK

Flash Control: Combustion device  
Flash Control Efficiency: 98.00 %  
Flash Temperature: 100.0 deg. F  
Flash Pressure: 62.0 psig

Component	Left in Glycol	Removed in Flash Gas
Water	99.99%	0.01%
Carbon Dioxide	50.07%	49.93%
Nitrogen	5.86%	94.14%
Methane	6.27%	93.73%
Ethane	19.43%	80.57%
Propane	37.81%	62.19%
Isobutane	49.00%	51.00%
n-Butane	56.53%	43.47%
Isopentane	60.76%	39.24%
n-Pentane	66.53%	33.47%
Cyclopentane	87.74%	12.26%
n-Hexane	78.91%	21.09%
Cyclohexane	93.51%	6.49%
Other Hexanes	73.58%	26.42%
Heptanes	88.84%	11.16%
Methylcyclohexane	95.14%	4.86%
Benzene	99.27%	0.73%
Toluene	99.56%	0.44%
Xylenes	99.85%	0.15%
C8+ Heavies	98.85%	1.15%

## REGENERATOR

No Stripping Gas used in regenerator.

Component	Remaining in Glycol	Distilled Overhead
Water	23.57%	76.43%
Carbon Dioxide	0.00%	100.00%
Nitrogen	0.00%	100.00%
Methane	0.00%	100.00%
Ethane	0.00%	100.00%
Propane	0.00%	100.00%
Isobutane	0.00%	100.00%
n-Butane	0.00%	100.00%
Isopentane	0.82%	99.18%
n-Pentane	0.75%	99.25%
Cyclopentane	0.57%	99.43%
n-Hexane	0.63%	99.37%
Cyclohexane	3.42%	96.58%
Other Hexanes	1.36%	98.64%
Heptanes	0.56%	99.44%
Methylcyclohexane	4.21%	95.79%
Benzene	5.04%	94.96%
Toluene	7.94%	92.06%
Xylenes	12.97%	87.03%
C8+ Heavies	12.19%	87.81%

## STREAM REPORTS:

## WET GAS STREAM

Temperature: 115.00 deg. F  
 Pressure: 1014.70 psia  
 Flow Rate: 8.35e+006 scfh

Component	Conc. (vol%)	Loading (lb/hr)
Water	1.87e-001	7.43e+002
Carbon Dioxide	1.39e-001	1.34e+003
Nitrogen	3.48e-001	2.15e+003
Methane	7.91e+001	2.79e+005
Ethane	1.40e+001	9.23e+004
Propane	4.10e+000	3.98e+004
Isobutane	5.23e-001	6.69e+003
n-Butane	9.66e-001	1.24e+004
Isopentane	2.30e-001	3.65e+003
n-Pentane	2.82e-001	4.48e+003
Cyclopentane	6.39e-003	9.86e+001
n-Hexane	5.25e-002	9.96e+002
Cyclohexane	4.99e-003	9.25e+001
Other Hexanes	2.45e-002	4.64e+002
Heptanes	1.89e-002	4.16e+002
Methylcyclohexane	7.69e-003	1.66e+002
Benzene	9.98e-004	1.72e+001
Toluene	2.00e-003	4.05e+001
Xylenes	9.98e-004	2.33e+001
C8+ Heavies	6.19e-003	2.32e+002
Total Components	100.00	4.45e+005

DRY GAS STREAM

-----  
 Temperature: 115.00 deg. F  
 Pressure: 1014.70 psia  
 Flow Rate: 8.33e+006 scfh

Component	Conc. (vol%)	Loading (lb/hr)
-----	-----	-----
Water	1.47e-002	5.83e+001
Carbon Dioxide	1.39e-001	1.34e+003
Nitrogen	3.49e-001	2.15e+003
Methane	7.93e+001	2.79e+005
Ethane	1.40e+001	9.23e+004
Propane	4.11e+000	3.98e+004
Isobutane	5.24e-001	6.69e+003
n-Butane	9.67e-001	1.23e+004
Isopentane	2.30e-001	3.64e+003
n-Pentane	2.82e-001	4.47e+003
Cyclopentane	6.38e-003	9.82e+001
n-Hexane	5.25e-002	9.95e+002
Cyclohexane	4.97e-003	9.19e+001
Other Hexanes	2.45e-002	4.63e+002
Heptanes	1.89e-002	4.15e+002
Methylcyclohexane	7.66e-003	1.65e+002
Benzene	9.47e-004	1.62e+001
Toluene	1.86e-003	3.77e+001
Xylenes	8.86e-004	2.07e+001
C8+ Heavies	6.16e-003	2.31e+002
-----	-----	-----
Total Components	100.00	4.45e+005

LEAN GLYCOL STREAM

-----  
 Temperature: 115.00 deg. F  
 Flow Rate: 2.50e+001 gpm

Component	Conc. (wt%)	Loading (lb/hr)
-----	-----	-----
TEG	9.85e+001	1.39e+004
Water	1.50e+000	2.11e+002
Carbon Dioxide	1.48e-012	2.09e-010
Nitrogen	2.28e-013	3.20e-011
Methane	8.68e-018	1.22e-015
Ethane	1.11e-007	1.56e-005
Propane	6.14e-009	8.64e-007
Isobutane	9.47e-010	1.33e-007
n-Butane	1.85e-009	2.60e-007
Isopentane	1.01e-004	1.42e-002
n-Pentane	1.56e-004	2.19e-002
Cyclopentane	1.43e-005	2.02e-003
n-Hexane	4.98e-005	7.02e-003
Cyclohexane	1.34e-004	1.89e-002
Other Hexanes	3.68e-005	5.18e-003
Heptanes	3.37e-005	4.74e-003
Methylcyclohexane	3.02e-004	4.25e-002
Benzene	3.42e-004	4.81e-002
Toluene	1.69e-003	2.38e-001

	Xylenes	2.81e-003	3.95e-001
	C8+ Heavies	1.49e-003	2.10e-001
-----			
	Total Components	100.00	1.41e+004

## RICH GLYCOL STREAM

-----

Temperature: 115.00 deg. F  
 Pressure: 1014.70 psia  
 Flow Rate: 2.66e+001 gpm  
 NOTE: Stream has more than one phase.

Component	Conc. (wt%)	Loading (lb/hr)
-----		
TEG	9.31e+001	1.39e+004
Water	6.02e+000	8.96e+002
Carbon Dioxide	1.40e-002	2.09e+000
Nitrogen	2.15e-003	3.20e-001
Methane	2.45e-001	3.64e+001
Ethane	2.22e-001	3.30e+001
Propane	1.43e-001	2.12e+001
Isobutane	2.99e-002	4.44e+000
n-Butane	7.05e-002	1.05e+001
Isopentane	1.91e-002	2.84e+000
n-Pentane	2.95e-002	4.39e+000
Cyclopentane	2.71e-003	4.03e-001
n-Hexane	9.43e-003	1.40e+000
Cyclohexane	3.97e-003	5.91e-001
Other Hexanes	3.48e-003	5.18e-001
Heptanes	6.38e-003	9.49e-001
Methylcyclohexane	7.15e-003	1.06e+000
Benzene	6.47e-003	9.62e-001
Toluene	2.02e-002	3.01e+000
Xylenes	2.05e-002	3.05e+000
C8+ Heavies	1.17e-002	1.74e+000
-----		
Total Components	100.00	1.49e+004

## FLASH TANK OFF GAS STREAM

-----

Temperature: 100.00 deg. F  
 Pressure: 76.70 psia  
 Flow Rate: 1.33e+003 scfh

Component	Conc. (vol%)	Loading (lb/hr)
-----		
Water	1.79e-001	1.13e-001
Carbon Dioxide	6.74e-001	1.04e+000
Nitrogen	3.06e-001	3.01e-001
Methane	6.05e+001	3.41e+001
Ethane	2.52e+001	2.66e+001
Propane	8.52e+000	1.32e+001
Isobutane	1.11e+000	2.27e+000
n-Butane	2.23e+000	4.56e+000
Isopentane	4.40e-001	1.12e+000
n-Pentane	5.80e-001	1.47e+000
Cyclopentane	2.01e-002	4.94e-002

n-Hexane	9.78e-002	2.96e-001
Cyclohexane	1.30e-002	3.83e-002
Other Hexanes	4.52e-002	1.37e-001
Heptanes	3.01e-002	1.06e-001

Methylcyclohexane	1.50e-002	5.17e-002
Benzene	2.55e-003	7.00e-003
Toluene	4.06e-003	1.31e-002
Xylenes	1.22e-003	4.55e-003
C8+ Heavies	3.35e-003	2.00e-002

Total Components	100.00	8.55e+001
------------------	--------	-----------

## FLASH TANK GLYCOL STREAM

Temperature: 100.00 deg. F  
Flow Rate: 2.64e+001 gpm

Component	Conc. (wt%)	Loading (lb/hr)
TEG	9.37e+001	1.39e+004
Water	6.05e+000	8.96e+002
Carbon Dioxide	7.06e-003	1.04e+000
Nitrogen	1.27e-004	1.87e-002
Methane	1.54e-002	2.28e+000
Ethane	4.33e-002	6.41e+000
Propane	5.43e-002	8.03e+000
Isobutane	1.47e-002	2.18e+000
n-Butane	4.01e-002	5.93e+000
Isopentane	1.17e-002	1.73e+000
n-Pentane	1.97e-002	2.92e+000
Cyclopentane	2.39e-003	3.54e-001
n-Hexane	7.49e-003	1.11e+000
Cyclohexane	3.73e-003	5.52e-001
Other Hexanes	2.58e-003	3.81e-001
Heptanes	5.70e-003	8.43e-001
Methylcyclohexane	6.84e-003	1.01e+000
Benzene	6.46e-003	9.55e-001
Toluene	2.03e-002	3.00e+000
Xylenes	2.06e-002	3.05e+000
C8+ Heavies	1.16e-002	1.72e+000
Total Components	100.00	1.48e+004

## FLASH GAS EMISSIONS

Flow Rate: 5.41e+003 scfh  
Control Method: Combustion Device  
Control Efficiency: 98.00

Component	Conc. (vol%)	Loading (lb/hr)
Water	6.16e+001	1.58e+002
Carbon Dioxide	3.79e+001	2.38e+002
Nitrogen	7.53e-002	3.01e-001
Methane	2.98e-001	6.82e-001
Ethane	1.24e-001	5.32e-001
Propane	4.19e-002	2.64e-001
Isobutane	5.46e-003	4.53e-002

n-Butane	1.10e-002	9.11e-002
Isopentane	2.17e-003	2.23e-002
n-Pentane	2.85e-003	2.94e-002
Cyclopentane	9.88e-005	9.89e-004
n-Hexane	4.81e-004	5.92e-003
Cyclohexane	6.38e-005	7.67e-004
Other Hexanes	2.23e-004	2.74e-003
Heptanes	1.48e-004	2.12e-003
Methylcyclohexane	7.38e-005	1.03e-003
Benzene	1.26e-005	1.40e-004
Toluene	2.00e-005	2.63e-004
Xylenes	6.01e-006	9.10e-005
C8+ Heavies	1.65e-005	4.01e-004
-----		
Total Components	100.00	3.98e+002

REGENERATOR OVERHEADS STREAM

-----

Temperature: 212.00 deg. F  
 Pressure: 14.70 psia  
 Flow Rate: 1.48e+004 scfh

Component	Conc. (vol%)	Loading (lb/hr)
-----		
Water	9.77e+001	6.84e+002
Carbon Dioxide	6.10e-002	1.04e+000
Nitrogen	1.72e-003	1.87e-002
Methane	3.66e-001	2.28e+000
Ethane	5.48e-001	6.41e+000
Propane	4.68e-001	8.03e+000
Isobutane	9.63e-002	2.18e+000
n-Butane	2.62e-001	5.93e+000
Isopentane	6.10e-002	1.71e+000
n-Pentane	1.03e-001	2.90e+000
Cyclopentane	1.29e-002	3.52e-001
n-Hexane	3.28e-002	1.10e+000
Cyclohexane	1.63e-002	5.33e-001
Other Hexanes	1.12e-002	3.76e-001
Heptanes	2.15e-002	8.38e-001
Methylcyclohexane	2.54e-002	9.69e-001
Benzene	2.98e-002	9.07e-001
Toluene	7.70e-002	2.76e+000
Xylenes	6.42e-002	2.65e+000
C8+ Heavies	2.28e-002	1.51e+000
-----		
Total Components	100.00	7.27e+002

COMBUSTION DEVICE OFF GAS STREAM

-----

Temperature: 1000.00 deg. F  
 Pressure: 14.70 psia  
 Flow Rate: 6.55e+000 scfh

Component	Conc. (vol%)	Loading (lb/hr)
-----		
Methane	1.65e+001	4.56e-002
Ethane	2.47e+001	1.28e-001
Propane	2.11e+001	1.61e-001
Isobutane	4.34e+000	4.35e-002

n-Butane	1.18e+001	1.19e-001
Isopentane	2.75e+000	3.42e-002
n-Pentane	4.66e+000	5.80e-002
Cyclopentane	5.81e-001	7.03e-003
n-Hexane	1.48e+000	2.20e-002
Cyclohexane	7.35e-001	1.07e-002
Other Hexanes	5.06e-001	7.52e-003
Heptanes	9.69e-001	1.68e-002
Methylcyclohexane	1.14e+000	1.94e-002
Benzene	1.35e+000	1.81e-002
Toluene	3.47e+000	5.52e-002
Xylenes	2.89e+000	5.30e-002
C8+ Heavies	1.03e+000	3.03e-002
-----		
Total Components	100.00	8.29e-001

**Legacy Measurement Solutions**

Good

Shreveport, LA  
318-226-7237

<b>Customer</b>	: 2325 - CNX GAS COMPANY LLC	<b>Date Sampled</b>	: 05/07/2014
<b>Station ID</b>	: 4205	<b>Date Analyzed</b>	: 05/14/2014
<b>Cylinder ID</b>	: 4620	<b>Effective Date</b>	: 06/01/2014
<b>Producer</b>	:	<b>Cyl Pressure</b>	: 450
<b>Lease</b>	: MAJORVILLE COMP STATION INLET	<b>Temp</b>	: 56
<b>Area</b>	: 420 - MAJORVILLE	<b>Cylinder Type</b>	: Spot
<b>State</b>	: WV	<b>Sample By</b>	: JM

<u>COMPONENT</u>	<u>MOL%</u>	<u>GPM@14.73(Psia)</u>
Methane	79.2756	0.000
Ethane	13.9757	3.749
Propane	4.1061	1.135
Iso-Butane	0.5241	0.172
Normal-Butane	0.9673	0.306
Iso-Pentane	0.2300	0.084
Normal-Pentane	0.2056	0.075
Nitrogen	0.3490	0.000
Carbon-Dioxide	0.1390	0.000
Oxygen	0.0039	0.000
BENZENE	0.0010	0.000
TOLUENE	0.0020	0.001
ETHYLBENZENE	0.0000	0.000
2,2-Dimethylbutane	0.0076	0.003
2,3-Dimethylbutane/CycloC5	0.0107	0.004
2-methylpentane	0.0466	0.019
3-methylpentane	0.0284	0.012
Normal-Hexane	0.0526	0.022
2,2-Dimethylpentane	0.0007	0.000
Methylcyclopentane	0.0064	0.002
3,3-Dimethylpentane	0.0011	0.001
CYCLOHEXANE	0.0050	0.002
2-Methylhexane	0.0108	0.005
2,3-Dimethylpentane	0.0030	0.001
3-Methylhexane	0.0109	0.005
1,t3-Dimethylcyclopentane	0.0002	0.000
1,t2-DMCYC5 / 2,2,4-TMC5	0.0001	0.000
N-Heptane	0.0131	0.006
METHYLCYCLOHEXANE	0.0077	0.004
2,5-Dimethylhexane	0.0007	0.000
2,3-Dimethylhexane	0.0011	0.001
2-Methylheptane	0.0026	0.001
4-Methylheptane	0.0010	0.001
3-Methylheptane	0.0022	0.001
1,t4-Dimethylcyclohexane	0.0010	0.000
N-OCTANE / 1,T2-DMCYC6	0.0033	0.002
1,t3-DMCYC6/1,C4-DMCYC6/1,C2,C3-TMCYC5	0.0000	0.000
2,4,4 TMC6	0.0000	0.000

2,6-Dimethylheptane / 1,C2-DMCYC6	0.0000	0.000
Ethylcyclohexane	0.0000	0.000
M-Xylene/P-Xylene	0.0010	0.000
O-XYLENE	0.0000	0.000
NONANE	0.0015	0.001
N-DECANE	0.0009	0.001
N-UNDECANE	0.0005	0.000
<b>TOTAL</b>	<b>100.0000</b>	<b>5.616</b>

Compressibility Factor (Z) @ 14.73 @ 60 Deg. F = 0.9966

C5+ GPM : 0.16052

Ideal Gravity: 0.7001

Real Gravity: 0.7021

C5+ Mole % : 0.6593

BTU @ (PSIA)	@14.65	@14.696	@14.73	@15.025
Ideal GPM	5.566	5.584	5.596	5.709
Ideal BTU Dry	1,224.66	1,228.51	1,231.35	1,256.01
Ideal BTU Sat	1,203.23	1,207.08	1,209.92	1,234.58
Real GPM	5.585	5.602	5.615	5.728
Real BTU Dry	1,228.79	1,232.66	1,235.52	1,260.35
Real BTU Sat	1,207.76	1,211.64	1,214.50	1,239.34

**Comments:**

Gas Analysis performed in accordance with GPA 2261

Sample Count : 210000007

Analytical Calculations performed in accordance with GPA 2172

COC :

Lab Technician: \_\_\_\_\_

**DEBORAH J  
MURPHY**

**ATTACHMENT O**

**Monitoring/Recordkeeping/Reporting/Testing Plans**

ATTACHMENT O - MONITORING, RECORDING, REPORTING, AND TESTING PLANS

Plan Type	Emission unit	Pollutant	Requirements	Frequency	Method of Measurement	Regulatory Reference
Recordkeeping	Dehydration Unit	HAP	Maintain benzene emissions below 0.9 megagrams/yr	Annual	GRI-GLYCalc with actual operating parameters	40 CFR 63 Subpart HH

# ATTACHMENT P

## Public Notice

## **AIR QUALITY PERMIT NOTICE Notice of Application**

Notice is given that CONE Midstream Partners, LP has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a Modification (R-13) for a Natural Gas Compressor Station (Majorsville Station) located near the Town of Majorsville, in Marshall County, West Virginia. The site latitude and longitude coordinates are: 39.96750 N, -80.53310 W.

The applicant estimates the potential increase to discharge the following Regulated Air Pollutants as a result of the change will be:

Particulate Matter (PM) = <0.01tpy  
Sulfur Dioxide (SO<sub>2</sub>) = <0.01tpy  
Volatile Organic Compounds (VOC) = 4.33 tpy  
Carbon Monoxide (CO) = <0.01tpy  
Nitrogen Oxides (NO<sub>x</sub>) = <0.01tpy  
Hazardous Air Pollutants (HAPs) = <0.01 tpy  
Carbon Dioxide Equivalents (CO<sub>2e</sub>) = <0.01 tpy

This facility is currently in operation and is seeking to increase the current throughput for the existing dehydration units and add one (1) additional dehydration unit with associated reboiler, and enclosed flare. Additionally, CONE is proposing to remove two (2) existing natural gas fired compressor engines and replace them with four (4) electric compressor units. Startup of operations is planned to begin upon permit issuance. Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57<sup>th</sup> Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1227, during normal business hours.

Dated this the XX day of March, 2015.

By: CONE Midstream Partners, LP  
David Morris  
1000 CONSOL Energy Drive  
Canonsburg, PA 15317