

### west virginia department of environmental protection

Office of Oil and Gas 601 57th Street SE Charleston, WV 25304 (304) 926-0450 (304) 926-0452 fax Earl Ray Tomblin, Governor Randy C. Huffman, Cabinet Secretary www.dep.wv.gov

October 30, 2013

## WELL WORK PERMIT

#### Horizontal 6A Well

This permit, API Well Number: 47-8510070, issued to NOBLE ENERGY, INC., is evidence of permission granted to perform the specified well work at the location described on the attached pages and located on the attached plat, subject to the provisions of Chapter 22 of the West Virginia Code of 1931, as amended, and all rules and regulations promulgated thereunder, and to all conditions and provisions outlined in the pages attached hereto. Notification shall be given by the operator to the Oil and Gas Inspector at least 24 hours prior to the construction of roads, locations, and/or pits for any permitted work. In addition, the well operator shall notify the same inspector 24 hours before any actual well work is commenced and prior to running and cementing casing. Spills or emergency discharges must be promptly reported by the operator to 1-800-642-3074 and to the Oil and Gas inspector.

Please be advised that form WR-35, Well Operators Report of Well Work is to be submitted to this office within 90 days completion of permitted well work, as should form WR-34 Discharge Monitoring Report within 30 days of discharge of pits, if applicable. Failure to abide by all statutory and regulatory provisions governing all duties and operations hereunder may result in suspension or revocation of this permit and, in addition, may result in civil and/or criminal penalties being imposed upon the operators.

In addition to the applicable requirements of this permit, and the statutes and rules governing oil and gas activity in WV, this permit may contain specific conditions which must be followed. Permit conditions are attached to this cover letter.

Per 35CSR-4-5.2.g this permit will expire in two (2) years from the issue date unless permitted well work is commenced. If there are any questions, please feel free to contact me at (304) 926-0499 ext. 1654.

James Martin

Chief

Operator's Well No: PEN2EHS

Farm Name: KIESSLING, TERRY & HELEN

API Well Number: 47-8510070

Permit Type: Horizontal 6A Well

Date Issued: 10/30/2013

Promoting a healthy environment.

API Number: <u>85</u> 10070

## **PERMIT CONDITIONS**

West Virginia Code § 22-6A-8(d) allows the Office of Oil and Gas to place specific conditions upon this permit. Permit conditions have the same effect as law. <u>Failure to adhere to the specified permit</u> conditions may result in enforcement action.

### **CONDITIONS**

- 1. The Office of Oil and Gas has approved your permit application, which includes your addendum. Please be advised that the addendum is part of the terms of the well work permit, and will be enforced as such. The Office of Oil and Gas must receive a copy of all data collected, and submitted in a timely fashion, but no later than the WR35 submittal.
- 2. This proposed activity may require permit coverage from the United States Army Corps of Engineers (USACOE). Through this permit, you are hereby being advised to consult with USACOE regarding this proposed activity.
- 3. If the operator encounters an unanticipated void, or an anticipated void at an unanticipated depth, the operator shall notify the inspector within 24 hours. Modifications to the casing program may be necessary to comply with W. Va. Code § 22-6A-5a (12), which requires drilling to a minimum depth of thirty feet below the bottom of the void, and installing a minimum of twenty (20) feet of casing. Under no circumstance should the operator drill more than fifty (50) feet below the bottom of the void or install less than twenty (20) feet of casing below the bottom of the void.
- 4. When compacting fills, each lift before compaction shall not be more than 12 inches in height, and the moisture content of the fill material shall be within limits as determined by the Standard Proctor Density test of the actual soils used in specific engineered fill, ASTM D698, Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort, to achieve 95 % compaction of the optimum density. Each lift shall be tested for compaction, with a minimum of two tests per lift per acre of fill. All test results shall be maintained on site and available for review.
- 5. Operator shall install signage per § 22-6A-8g (6) (B) at all source water locations included in their approved water management plan within 24 hours of water management plan activation.
- 6. Oil and gas water supply wells will be registered with the Office of Oil and Gas and all such wells will be constructed and plugged in accordance with the standards of the Bureau for Public Health set forth in its Legislative rule entitled *Water Well Regulations*, 64 C.S.R. 19. Operator is to contact the Bureau of Public Health regarding permit requirements. In lieu of plugging, the operator may transfer the well to the surface owner upon agreement of the parties. All drinking water wells within fifteen hundred feet of the water supply well shall be flow tested by the operator upon request of the drinking well owner prior to operating the water supply well.
- 7. Pursuant to the requirements pertaining to the sampling of domestic water supply wells/springs the operator shall, no later than thirty (30) days after receipt of analytical data provide a written copy to the Chief and any of the users who may have requested such analyses.
- 8. If any explosion or other accident causing loss of life or serious personal injury occurs in or about a well or well work on a well, the well operator or its contractor shall give notice, stating the

API Number: <u>85</u> <u>10070</u>

## **PERMIT CONDITIONS**

particulars of the explosion or accident, to the oil and gas inspector and the Chief, within 24 hours of said accident.

9. During the casing and cementing process, in the event cement does not return to the surface, the oil and gas inspector shall be notified within 24 hours.

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION, OFFICE OF OIL AND GAS WELL WORK PERMIT APPLICATION

	WEEL WOLL				539
1) Well Operator:	Noble Energy, Inc.	494501907	085	Clay	Pennsboro
		Operator ID	County	District	Quadrangle
2) Operator's Well	Number: PEN2EHS		Well Pad Nan	ne: PEN2	
3 Elevation, curren	t ground: 1074.85	Elevation, proposed	post-construc	ction:	1075.4
4) Well Type: (a) C	ias ■ Oil	Underground	d Storage		
	Other				a a
(b) I	f Gas: Shallow	■ Deep			
	Horizontal				
5) Existing Pad? Ye	s or No: No	_			
6) Proposed Target	Formation(s), Depth(s), Anti-	cipated Thicknesses an	d Associated	Pressure(s):	
Target-Marcellus, Dep	th- 6262- 324; Thickness- 62"; Press	ure- 4174 # psi			
7) Proposed Total V	ertical Depth: 6314'				
8) Formation at Tot	al Vertical Depth: Marcella	Js			
9) Proposed Total N	Measured Depth: 15267'				
10) Approximate Fr	esh Water Strata Depths:	454'			
11) Method to Dete	rmine Fresh Water Depth:	Closest well & Seneca T	echnology data	base	
12) Approximate Sa	altwater Depths: 1244'				
13) Approximate Co	oal Seam Depths: no coa	Ī			
14) Approximate D	epth to Possible Void (coal m	nine, karst, other):	none		
	well location contain coal sea ctive mine? If so, indicate na		or no		
16) Describe propos		ical depth to the Marcellus at an	estimated total ve	ertical depth of app	roximately 6314 feet.
	timulate and produce the Marcellus Fo	rmation.			
Should we encounter a	unanticipated void we will install a minim	um of 20' of casing below the vo	oid but not more that	an 50' set a basket	and grout to surface.
17) Describe fractur	ring/stimulating methods in d	etail:			
The stimulation will be mu	ultiple stages divided over the lateral length o	f the well. Stage spacing is depend	ent upon engineerin	g design. Slickwater	fracturing technique will
be utilized on each sta	ge using sand, water, and chemicals.				
				<del>- 1 2 3 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1</del>	<del></del>
18) Total area to be	disturbed, including roads, s	tockpile area, pits, etc,		8.43 Office of Oil and O	
19) Area to be distu	rbed for well pad only, less a	ccess road (acres):	8.0 WV Dep	ot. of Environmental	Protection

Jul 8-21-19

20)

CASING AND TUBING PROGRAM = 85 10070

ТҮРЕ	Size	New or Used	Grade	Weight per ft.	FOOTAGE: For Drilling	INTERVALS: Left in Well	CEMENT: Fill -up (Cu. Ft.)
Conductor	20"	N	LS	52	40'	40'	GTS
Fresh Water	13 3/8"	Ν	J-55	54.5	579'	579'	CTS
Coal							
Intermediate	9 5/8"	Ν	HCK-55 BTC	36.0	5410'	5410'	CTS
Production	5 1/2"	N	HCP-110 TXP BTC	20.0	15267'	15267'	Class A tail slurry to inside intermediate casing
Tubing							
Liners							

TYPE	Size	Wellbore Diameter	Wall Thickness	Burst Pressure	Cement Type	Cement Yield
Conductor	20"	26"	.25	2730	Grout to Surface	Grout to Surface
Fresh Water	13 3/8"	17.5"	.380	2730	Type 1	1.18
Coal						
Intermediate	9 5/8"	12.25"	.352	3520	Class A	1.19
Production	5 1/2"	8.75/8.5"	.361	12,640	Class A	1.27
Tubing						
Liners						

	PACKERS	s Recei	ved
Kind:		2	
Sizes:		2 3	19ha g
Depths Set:		Office of Oil ar WV Dept, of Environme	

Jan Callen

Bow spring centralizers every three joints to surface. Intermediate - Bow spring centralizers on every joint to KOP, One every third joint every third joint from KOP to 100' from surface.  Production - Rigid bow spring every third joint from KOP to TOC, rigid bow spring every joint to KOP.  22) Describe all cement additives associated with each cement type.  Conductor - 1.15% CaCl2.  Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0.6% Gas migration control additive, 0.5% fluid loss additive 0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersar 0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insure the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is at setting depth, the hole is drilled wilk KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled with synthetic oil base mud and once at thole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling bulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	21) Describe centralizer placement for each casing st	ring. Conductor - No centralizers used. Fresh Water/Surface-
Production - Rigid bow spring every third joint from KOP to TOC, rigid bow spring every joint to KOP.  22) Describe all cement additives associated with each cement type.  Conductor - 1.15% CaCl2.  Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0.6% Gas migration control additive, 0.5% fluid loss additive, 0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersar 0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insur the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water - The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled will air and casing is run in air. Once casing is at setting depth, the hole is filled will KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at the hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drillin builded and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	Bow spring centralizers every three joints to surfa	ice. Intermediate - Bow spring
22) Describe all cement additives associated with each cement type.  Conductor - 1.15% CaCl2.  Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0.6% Gas migration control additive, 0.5% fluid loss additive, 0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersant 0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insure the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water - The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled with KCl water and a minimum of one hole volume. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling builded and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	centralizers on every joint to KOP, One every third joint e	every third joint from KOP to 100' from surface.
Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0.6% Gas migration control additive, 0.5% fluid loss additive 0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersant 0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insure the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water on air or SOBM and filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at thole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling bulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	Production - Rigid bow spring every third joint from KOF	to TOC, rigid bow spring every joint to KOP.
Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0.6% Gas migration control additive, 0.5% fluid loss additive, 0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersar 0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  23) Proposed borehole conditioning procedures. Conductor - The hole is drilled w/ air and casing is run in air. Apart from insur the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casi is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumpic cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at the hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drillin bulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.		
Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0.6% Gas migration control additive, 0.5% fluid loss additive 0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersant 0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insure the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water on filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at thole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drillin bulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.		
Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0.6% Gas migration control additive, 0.5% fluid loss additive, 0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersar 0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  23) Proposed borehole conditioning procedures. Conductor - The hole is drilled w/ air and casing is run in air. Apart from insur the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casi is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumpic cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at the hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling bulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.		
0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediate - 10.0% BWOW NaCl, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersar 0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  23) Proposed borehole conditioning procedures.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insure the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at thole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling bulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	22) Describe all cement additives associated with each	ch cement type. Conductor - 1.15% CaCl2.
0.4% BWOB Cement retarder. Production: 2.6% Cement extender, 0.7% Fluid Loss additive, 0.5% high temperature retard 0.2% friction reducer.  23) Proposed borehole conditioning procedures.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insure the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water one drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at thole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling bulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	Fresh Water - 1.15% CaCl2. Coal - 1.15% CaCl2, 0	0.6% Gas migration control additive, 0.5% fluid loss additive,
O.2% friction reducer.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insure the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water or filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at thole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	0.4% Salt tolerant dispersant, and 0.3% defoamer. Intermediat	e - 10.0% BWOW NaCI, 0.2% BWOB Anti-foam, 0.3% BWOW Dispersant,
23) Proposed borehole conditioning procedures.  Conductor - The hole is drilled w/ air and casing is run in air. Apart from insure the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at thole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	0.4% BWOB Cement retarder. Production: 2.6% Cement	extender, 0.7% Fluid Loss additive, 0.5% high temperature retarder,
the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at the hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	0.2% friction reducer.	
the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at the hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.		
the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at the hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.		
the hole is clean via air circulation at TD, there are no other conditioning procedures. Fresh Water -The hole is drilled w/air and casing is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at the hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	23) Proposed barehale conditioning procedures	Conductor. The hole is drilled w/ air and casing is run in air. Anat from insuring
is run in air. Once casing is on bottom, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at a hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.		
cement. Coal - The hole is drilled w/air and casing is run in air. Once casing is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.		-
is circulated prior to pumping cement. Intermediate - Once surface casing is set and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water of filled w/ KCl water once drilled to TD. The well is conditioned with KCl circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pump rate. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	is run in air. Once casing is on bottom, the hole is filled w/ KC	I water and a minimum of one hole volume is circulated prior to pumping
filled w/ KCI water once drilled to TD. The well is conditioned with KCI circulation prior to running casing. Once casing is at setting depth, the well is circulated a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pump rate. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	cement. Coal - The hole is drilled w/air and casing is run in air. Once casin	g is at setting depth, the hole is filled w/ KCl water and a minimum of one hole volume
a minimum of one hole volume prior to pumping cement. Production - The hole is drilled with synthetic oil base mud and once at hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	is circulated prior to pumping cement, Intermediate - Once surface casing is se	t and cemented Intermediate hole is drilled either on air or SOBM and filled w/ KCl water once
hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	filled w/ KCI water once drilled to TD. The well is conditioned with KCI ci	rculation prior to running casing. Once casing is at setting depth, the well is circulated
hole is circulated at a drilling pump rate for at least three hours. Once the torque and drag trends indicate the hole is clean the drilling bulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.	a minimum of one hole volume prior to pumping cement. Pro	oduction - The hole is drilled with synthetic oil base mud and once at TD
pulled and casing is run. Once on bottom w/ casing the hole is circulated a minimum of one hole volume prior to pumping cement.		

Received

# STATE OF WEST VIRGINIA DEPARTMENT OF ENVIRONMENTAL PROTECTION OFFICE OF OIL AND GAS

#### FLUIDS/ CUTTINGS DISPOSAL & RECLAMATION PLAN

Operator Name Noble Energy, Inc.		OP Code 494501907
Watershed (HUC 10) North Fork of Hug	ghs River HUC 10 / Bonds Creek Q	Quadrangle Pennsboro
Elevation 1074.85	County_Ritchie	District Clay
Will a pit be used for drill cuttings?  If so, please describe anticip	Yes No x ated pit waste: closed loop-no	
Will a synthetic liner be used Proposed Disposal Method F		If so, what ml.?
Land Appl Undergrou Reuse (at	ication and Injection (UIC Permit Numb API Number <u>at next anticipated well</u> isposal (Supply form WW-9 for	
Will closed loop system be used? ye	·s	
Drilling medium anticipated for this v	vell? Air, freshwater, oil based,	etc. Air/water based mud through intermediate string then SOBM
-If oil based, what type? Syn	nthetic, petroleum, etc. Synthetic	
Additives to be used in drilling mediu	ım? Please see attached list	
Drill cuttings disposal method? Leav	e in pit, landfill, removed offsite,	e, etc.
-If left in pit and plan to solid	dify what medium will be used?	(cement, lime, sawdust)
-Landfill or offsite name/per	mit number? Please see attache	ed list
on August 1, 2005, by the Office of C provisions of the permit are enforces law or regulation can lead to enforcer I certify under penalty of la application form and all attachment	Dil and Gas of the West Virginia I able by law. Violations of any toment action.  aw that I have personally examits thereto and that, based on not that the information is true, action, including the possibility of the Swiger	Department of Environmental Protection. I understand that the term or condition of the general permit and/or other applicable and am familiar with the information submitted on this my inquiry of those individuals immediately responsible for courate, and complete. I am aware that there are significant fine or imprisonment.  OFFICIAL SEA Notary Public, State of West Virginia LAURA L. ADKIRS Hard Rook Exploration, inc. Hard Rook Exploration, inc. Hard Rook Exploration, MV 25360 Hard Rook Exploration, State of West Virginia Commission Explices November 23, 2015
Subscribed and sworn before me this	and day of aug	, 2013 Office of Oil and Gas WV Dept. of Environmental Protection
Jama J. Clerke	03 >0.15	Notary Public
My commission expires	mber 33, 2015	

Operator's Well No. PEN2CHS

Noble Energy	, Inc.				
Proposed Revegetation Tre	atment: Acres Disturbed	11.2	Prev	egetation pH	
Lime 2 to 3	Tons/acre or to cor	rect to pH _		-	
Fertilizer (10-20-2	20 or equivalent) 500	lbs/ac	cre (500 lbs minimum)		
	raw at 2				
			Mixtures		
		Seed 1	VIIAtures	A	
Seed Type	Area I Ibs/acre		Seed T	Area II	lbs/acre
Tall Fescue	40		Tall Fescue	40	
Ladino Clover	5	at a second	Ladino Clover	5	
Photocopied section of inverse Plan Approved by:  Comments:	Jacob silved 1.5 topograpine sne	Con Con	5		
				Rec	eived
				SFP (	2 3 2019
Oil and Gas Inspe	ctor		Date:	Office of 2/-W/-Bept, of Env	Oil and Gas ironmental Protection
Field Reviewed?	(V) Yes	(	) No		

## west virginia department of environmental protection



## Water Management Plan: Primary Water Sources



WMP-01515 API/ID Number: 047-085-10070 Operator: Noble Energy, Inc
PEN2EHS

#### Important:

For each proposed primary water source (including source intakes for purchased water sources) identified in your water management plan, and summarized herein, DEP has made an evaluation concerning water availability over the specified date range. DEP's assessment is based on the following considerations:

- •Statistical analysis of historical USGS stream gauge data (transferred to un-gauged locations as necessary);
- •Identification of sensitive aquatic life (endangered species, mussels, etc.);
- •Quantification of known existing demands on the water supply (Large Quantity Users);
- •Minimum flows required by the Army Corps of Engineers; and
- · Designated stream uses.

Based on these factors, DEP has provided, for each intake location (and origination point for purchased water), a reference gauge location and discharge flow reading which must be surpassed prior to withdrawals. Additionally, DEP has established a minimum passby flow at the withdrawal location which must also be surpassed prior to withdrawals. These thresholds are considered terms of the permit and are enforceable as such.

DEP is aware that some intake points will be used for mutiple wells and well sites. In these cases, the thresholds set by the Water Management Plan are to be interepreted as total withdrawal limits for each location over the specified date range regardless of how many wells are supported by that intake.

For all purchased water intakes, determinations of water availability are made at the original source intake location. It is the responsibility of the Oil and Gas Operator, not the seller, to cease withdrawal of water from the seller when flows are less than the minimum gauge reading at the stream gauge referenced by the Water Management Plan in order to protect stream uses.

Note that the determinations made herein are based on the best available data, but it is impossible to predict water availability in the future. While the DEP has carefully established these minimum withdrawal thresholds, it remains the operator's responsibility to protect aquatic life at all times. Approval to withdrawal is contingent upon permission from the land owner. It is the responsibility of the operator to secure and maintain permission prior to any withdrawals.

The operator is reminded that 24-48 hours prior to withdrawing (or purchasing) water, DEP must be notified by email at DEP.water.use@wv.gov.

APPROVED OCT 2 8 2013

		Source	ce Summary	Y		
	WMP-01515	API Number:	047-085-1	0070 C	perator: Noble	Energy, Inc
			PEN2EH:	S		
Purchased	d Water					
<ul><li>Source</li></ul>	Ohio River @ Select	Energy		Pleasants	Owner:	Select Energy
Start Date 9/15/2013	End Date 9/15/2014	Total Volume (gal) 11,000,000	Max. daily p	ourchase (gal)	Intake Latitude 39.346473	Intake Longitude: -81.338727
<b>✓</b> Regulated	Stream? Ohio Riv	er Min. Flow Ref. Gauge I	D: 999999	98	Ohio River Station: Ra	cine Dam
Max. Pump	rate (gpm): 1,6	80 Min. Gauge Read	ling (cfs):	7,216.00	Min. Passby (	cfs)
	DEP Comments:	Refer to the specified s website: http://www.e				iver forecast
<ul><li>Source</li></ul>	West Virginia Americ	can Water - Weston Water	Treatme	Lewis	Owner: <b>Wes</b>	t Virginia American Watei
Start Date 9/15/2013	End Date 9/15/2014	Total Volume (gal) 11,000,000	Max. daily p	ourchase (gal)	Intake Latitude -	: Intake Longitude -
<b>✓</b> Regulated	Stream? Stonewall.	Jackson Dam Ref. Gauge I	D: 30610	00 \	WEST FORK RIVER AT EN	TERPRISE, WV
Max. Pump	rate (gpm): 0	Min. Gauge Read	ling (cfs):	170.57	Min. Passby (	cfs)
	DEP Comments:					
<ul><li>Source</li></ul>	Glenville Utility			Gilmer	Owner:	Glenville Utility
Start Date 9/15/2013	End Date 9/15/2014	Total Volume (gal) 11,000,000	Max. daily p	ourchase (gal) 000	Intake Latitude -	: Intake Longitude
Regulated	l Stream? Bu	ırnsville Dam Ref. Gauge I	ID: 31550	00 LIT	TLE KANAWHA RIVER AT	PALESTINE, WV
Max. Pump	rate (gpm): 0	Min. Gauge Read	ding (cfs):	303.75	Min. Passby (	cfs)
	DEP Comments:					

#### Source Detail

	WMP-0	1515	API/ID Number: 047-08 PEN2EHS	5-10070 Operator: Noble Energy	Inc
Source II	): 27121 Sou		Ohio River @ Select Energy Select Energy	Source Latitude: 39.3464 Source Longitude: -81.3387	
	HUC-8 Code: 5030201  Drainage Area (sq. mi.): 25000 County: Pleasants  Endangered Species? Mussel Stream?  Trout Stream? Tier 3?			Anticipated withdrawal start date: 9/ Anticipated withdrawal end date: 9/	15/2013 15/2014 000,000
✓ Re	gulated Stream? oximate PSD? uged Stream?		ver Min. Flow	Max. Pump rate (gpm):  Max. Simultaneous Truck  Max. Truck pump rate (gpm)	
	Reference Gaug  Drainage Area (sc	999999 . mi.)	8 Ohio River Station: Racine Dar 25,000.00	m Gauge Threshold (cfs):	7216
Month	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)		
1	50,956.00	-	water (cis)		
2	54,858.00	-			
3	73,256.00				
4	62,552.00	-			
5	43,151.00	12	2		
6	27,095.00	-			
7	17,840.00	12	-		
8	14,941.00	-	-		
9	14,272.00	-			
10	17,283.00	. 2	120		
11	29,325.00	-	-		
12	46,050.00	Istor Au	ailability Drofila	Water Availability Assessment	of Location
	V	ater Av	ailability Profile	Base Threshold (cfs):	-
8000	0 —			Upstream Demand (cfs):	0.00
6000	0 Flow on th	nis stream	is regulated by the Army Corn	Downstream Demand (cfs):	0.00
Flow on this stream is regulated by the Army Corps of 40000 Engineers. Please awhere to the stated thresholds to				A STATE OF THE STA	3.74
	maintain the minimum guaranteed flow requirements.			hts. Headwater Safety (cfs):	0.00
2000	0			Ungauged Stream Safety (cfs):	0.00
	1 2	3 4	5 6 7 8 9 10 1	11 12 Min. Gauge Reading (cfs):	

◆ Median Monthly Flow ■ Threshold

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

#### Source Detail

			Source Deta	dII		
	WMP- <b>(</b>	01515	API/ID Number: 047 PEN2EHS		Operator: Noble En	nergy, Inc
☐ Tro	D: 27122 Sou  HUC-8 Code:  Drainage Area  Idangered Species  out Stream?  egulated Stream?  oximate PSD?	West V 5020002 (sq. mi.): 104.83	eam?	Anticipat Anticipa	Source Latitude: - Source Longitude: -  ted withdrawal start date: ted withdrawal end date:  Volume from Source (gal):  Max. Pump rate (gpm):  Max. Simultaneous	9/15/2013 9/15/2014 11,000,000 0
<b>✓</b> Ga	auged Stream?				Max. Truck pump rat	te (gpm)
Month  1 2 3 4 5	Median monthly flow (cfs) 321.23 361.67 465.85 266.43 273.47	3061000  759.  Threshold (+ pump	WEST FORK RIVER AT ENT  00  Estimated Available water (cfs)	ERPRISE, WV	Gauge Threshold (cfs):	234
6 7 8 9	137.03 88.78 84.77 58.98	-	-			
10 11 12	57.83 145.12 247.76	-				
	V	/ater Availal	oility Profile		Water Availability Assessm  Base Threshold (cfs):	ent of Location
500 - 400 - 300 -		. Pl <del>ease a</del> dhere	ulated by the Army Co to the stated thresho aranteed flow require	olds to	Upstream Demand (cfs): Downstream Demand (cfs): Pump rate (cfs): Headwater Safety (cfs):	24.32 : 0.00 0.00 8.08
100			The state of the s		Ungauged Stream Safety (c	

Median Monthly Flow — Threshold


Min. Gauge Reading (cfs):

Passby at Location (cfs):

<sup>&</sup>quot;Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

		Source	e Detail			
	WMP- <b>01515</b> API/ID Number:		047-085-10070	Operator: Noble E	nergy, Inc	
		PE	N2EHS			
Source ID: 27:	123 Source Name	Glenville Utility		Source Latitude: -		
		Glenville Utility		Source Longitude: -		
HUC-	-8 Code: 503	0203				
Drain	nage Area (sq. mi.):	385.94 County:	Gilmer	cipated withdrawal start date:	9/15/2013	
			Ant	cicipated withdrawal end date:	9/15/2014	
		ussel Stream?	To	Total Volume from Source (gal): 11,00		
	Trout Stream?			Max Pump rate (gpm): 0		
☐ Regulated	00.00	sville Dam		max. ramp race (Spin).		
☐ Proximate	PSD?			Max. Simultaneou		
✓ Gauged St	tream?			Max. Truck pump ra	ate (gpm)	
Refere	nce Gaug 3155	000 LITTLE KANAWHA F	RIVER AT PALESTINE, W	/V		
Draina	ge Area (sq. mi.)	1,516.00		Gauge Threshold (cfs):	243	
Month mont	edian Thresho	Augilala				
1 40	7.80 77.33	331.59				
		The state of the s				

<u>Month</u>	Median monthly flow (cfs)	Threshold (+ pump	Estimated Available water (cfs)
1	407.80	77.33	331.59
2	669.98	77.33	593.76
3	785.33	77.33	709.12
4	505.51	77.33	429.29
5	324.07	77.33	247.85
6	132.12	77.33	55.90
7	99.89	77.33	23.68
8	56.28	77.33	-19.94
9	35.11	77.33	-41.11
10	52.89	77.33	-23.32
11	223.44	77.33	147.23
12	363.54	77.33	287.32

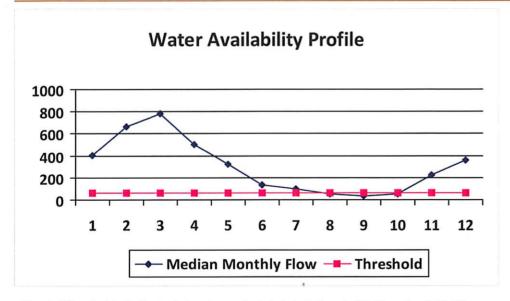

December 11/25-)	C1 0C
Base Threshold (cfs):	61.86
Upstream Demand (cfs):	0.00
Downstream Demand (cfs):	0.00
Pump rate (cfs):	0.00
Headwater Safety (cfs):	15.47
Ungauged Stream Safety (cfs):	0.00
Min. Gauge Reading (cfs):	303.75
Passby at Location (cfs):	-

"Threshold", as depicted in the chart above is meant only to indicate the calculated base threshold at the proposed withdrawal location. This value does not include the proposed pump rate or existing demand on the stream. Refer to the monthly breakdown above for a more complete estimation of water availability by month.

## west virginia department of environmental protection



## Water Management Plan: Secondary Water Sources



WMP-01515

API/ID Number

047-085-10070

Operator:

Noble Energy, Inc

PEN2EHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

## Lake/Reservior

Source ID:	27124 Source Na	7124 Source Name		Bonds Creek Site No. 1 (WV08503)			Source start date:	
						Source end	end date:	9/15/2014
	Source La	t:	39.316142	Source Long:	-80.98423	County	F	Ritchie
	Max. Daily Purchase (gal)				Total Volume from Source (gal):			11,000,000
	DEP Comments:	EP Comments: Location also known as Tracy La			e or Bonds Cree	ek Lake		

WMP-01515 API/ID Number 047-085-10070 Operator: Noble Energy, Inc
PEN2EHS

#### Important:

For each proposed secondary water source identified in your water management plan (i.e., groundwater well, lake/reservoir, recycled frac water, multi-site impoundment, out-of-state source), DEP makes no estimation of the availability of water. These sources may prove to be unsuitable water supplies. Please review the following notes:

- •For groundwater supply wells, DEP recommends that the operator contact the local health department prior to drilling any new well; and reminds the operator that all drinking water wells within 1,500 feet of a water supply well shall be flow- and quality-tested by the operator at the request of the drinking well owner prior to operation of the water supply well.
- •For each proposed multi-site impoundment water source identified in your water management plan (if applicable), DEP will review the withdrawal limits established in the referenced Water Management Plan for current suitability and provide to the operator these limits for each identified intake. Note that withdrawal limits may be modified as necessary based on changing demands upon that water supply.

Source ID:	27125	Source Name	FLG Tank Pad			Source start date:	9/15/2013
						Source end date:	9/15/2014
		Source Lat:	39.335467	Source Long:	-80.001958	County	Ritchie
		Max. Daily Pu	rchase (gal)		Total Volu	me from Source (gal):	11,000,000
	DEP Co	mments:					
					anagement plan		nce: WMP-1
					anagement plan plan unless othe		nce: WMP-1
esholds est							nce: WMP-1
esholds est							nce: WMP-14
esholds est ted.	ablished	l in that plan g					nce: WMP-14
	ablished	l in that plan g					9/15/201:
esholds estated.	ablished	l in that plan go	overn this wate			erwise	
esholds estated.	ablished	l in that plan go	overn this wate			Source start date:	9/15/201

