



625 Liberty Ave, Suite 1700  
Pittsburgh PA 15222  
[www.eqt.com](http://www.eqt.com)

TEL: (412) 395-3699

FAX: (412) 395-2156

Alex Bosiljevac  
Environmental Coordinator

March 4, 2015

**CERTIFIED MAIL # 7014 2120 0002 1164 5181**

Mr. William F. Durham, Director  
West Virginia Department of Environmental Protection  
Division of Air Quality  
601 57<sup>th</sup> Street, SE  
Charleston, West Virginia, 25304

**RE: G70 Permit Application  
EQT Production Company  
WEU-49 Natural Gas Production Site**

Dear Mr. Durham,

Enclosed are one paper copy and two electronic copies of a G70-A General Air Permit Application for WEU-49 Natural Gas Production Well Site. A legal advertisement will be published in the next few days and proof of publication will be forwarded as soon as it is received. Please contact me for payment of the application fee by credit card.

If you have any questions concerning this permit application, please contact me at (412) 395-3699 or by email at [abosiljevac@eqt.com](mailto:abosiljevac@eqt.com).

Sincerely,

A handwritten signature in blue ink, appearing to read 'RAB' with a large, sweeping flourish extending from the end.

Alex Bosiljevac  
EQT Corporation

Enclosures



# **EQT Production Company**

## **G70-A General Air Permit Application WEU 49 Natural Gas Production Site**

West Union, West Virginia

**Prepared By:**

**ENVIRONMENTAL RESOURCES MANAGEMENT, Inc.  
Hurricane, West Virginia**

**March 2015**

## INTRODUCTION

EQT Production Company (EQT) is submitting this G70-A Class II General Permit application to the WVDEP's Department of Air Quality for the WEU-49 natural gas production site located in Doddridge County, West Virginia. This application addresses the operational activities associated with the production of natural gas and condensates at the WEU-49 pad.

## FACILITY DESCRIPTION

The EQT WEU-49 natural gas production site operates in Doddridge County, WV and consists of seven (7) natural gas wells. Natural gas and liquids (including water and condensates) are extracted from underground deposits. The natural gas will be transported from the wells to a gas line for compression and additional processing, as necessary. The produced liquids are stored in storage vessels.

The applicant seeks to authorize the operation of:

- Seven (7) natural gas wells;
- Seven (7) line heaters each rated at 1.00 MMBtu/hr heat input;
- One (1) 140 bbl sand trap blowdown tank for storage of condensate and water.
- Eight (8) 400 barrel (bbl) tanks for storage of produced condensate and water;
- Two (2) thermoelectric generator (TEG) each rated at 0.013 mmBtu/hr heat input; and
- Two (2) enclosed combustion devices each with a capacity of 11.66 MMBtu/hr heat input.

A process flow diagram is included in this application in Attachment D.

## STATEMENT OF AGGREGATION

The WEU-49 pad will be located in Doddridge County, WV and operated by EQT Production Company. Stationary sources of air pollutants may require aggregation of total emission levels if these sources share the same industrial grouping, are operating under common control, and are classified as contiguous or adjacent properties. EQT will operate the WEU-49 with the same industrial grouping as nearby facilities, and some of these facilities are under common control. EQT, however, is not subject to the aggregation of stationary emission sources because these sites do not meet the definition of contiguous or adjacent facilities.

The WEU-49 pad will operate under SIC code 1311 (Crude Petroleum and Natural Gas Extraction). There are surrounding wells and compressor stations operated by EQT that share the same two-digit major SIC code of 13 for Crude Petroleum and Natural Gas Extraction. Therefore, the WEU-49 pad does share the same SIC codes as the surrounding wells and compressor stations.

EQT Production Company is the sole operator of the WEU-49 pad. EQT is also the sole operator of other production sites and compressor stations in the area. Therefore, EQT does qualify as having nearby operations under common control.

The closest EQT owned or operated site is the WEU production site located 0.85 miles (4,400 ft.) northeast of the WEU-49 pad. Nearby sites do not meet the definition of contiguous or adjacent properties since they are not in contact and do not share a common boundary. Operations conducted at the WEU-49 site do not rely on or interact with other sites. Furthermore, operations separated by this distance do not meet the common sense notion of a "plant."

Based on the above reasoning, EQT is not subject to the aggregation of stationary emission sources since the stationary sources are not considered contiguous or adjacent facilities.

## **REGULATORY DISCUSSION**

This section outlines the State air quality regulations that could be reasonably expected to apply to the WEU-49 pad and makes an applicability determination for each regulation based on activities conducted at the site and the emissions of regulated air pollutants. This review is presented to supplement and/or add clarification to the information provided in the WVDEP G70-A permit application forms.

The West Virginia State Regulations address federal regulations, including Prevention of Significant Deterioration permitting, Title V permitting, New Source Performance Standards, and National Emission Standards for Hazardous Air Pollutants. The regulatory requirements in reference to WEU-49 are described in detail in the below section.

## **WEST VIRGINIA STATE AIR REGULATIONS**

*45 CSR 02 – To Prevent and Control Particulate Air Pollution From Combustion of Fuel in Indirect Heat Exchangers*

The line heaters are indirect heat exchangers that combust natural gas but are exempt since the heat input capacities are less than 10 MMBtu/hr.

*45 CSR 04 – To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor*

Operations conducted at the WEU-49 wellpad are subject to this requirement. Based on the nature of the process at the wellpad, the presence of objectionable odors is unlikely.

*45 CSR 06 – Control of Air Pollution from the Combustion of Refuse*

The enclosed combustion device located on the WEU-49 natural gas production site is subject to this regulation. Per 45 CSR 6-4.3, opacity of emissions from the enclosed combustion device shall not exceed 20 percent, except as provided by 4.4. Particulate matter emissions from this unit will not exceed the levels calculated in accordance with 6-4.1.

*45 CSR 10 – To Prevent and Control Air Pollution From the Emission of Sulfur Oxides*

The line heaters are indirect heat exchangers that combust natural gas but are exempt since the heat input capacities are less than 10 MMBtu/hr.

*45 CSR 13 – Permits for Construction, Modification, Relocation, And Operation of Stationary Sources of Air Pollutants*

This G70-A permit application is being submitted for the operational activities associated with EQT's production of natural gas.

*45 CSR 14 – Permits for Construction and Major Modification of Major Stationary Sources of Air Pollution for the Prevention of Significant Deterioration*

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration (PSD). The G70A-applicability criterion excludes facilities that meet the definition of a major source as defined in 45 CSR 19 for being eligible for the general permit.

Operation of equipment at the WEU-49 pad will not exceed emission thresholds established by this permitting program. EQT will monitor future construction and modification activities at the site closely and will compare any future increase in emissions with the PSD thresholds to ensure these activities will not trigger this program.

*45 CSR 16 - Standards of Performance for New Stationary Sources (NSPS)*

45CSR 16 applies to all registrants that are subject to any of the NSPS requirements described in more detail in the Federal Regulations section. Applicable requirements of NSPS, Subpart JJJJ and OOOO are included in the G70-A general permit.

This facility is expected to contain gas well affected facilities under Subpart OOOO. No additional NSPS are applicable for this facility. Additional discussion is provided in the Federal Regulation Discussion of this permit application

*45 CS R19 – Permits for Construction and Major Modification of Major Stationary Sources of Air Pollution which Cause or Contributed to Non-attainment*

Federal construction permitting programs regulate new and modified sources of non-attainment pollutants under Non-Attainment New Source Review (NNSR). The G70A-applicability criterion excludes facilities that meet the definition of a major source as defined in 45 CSR 19 for being eligible for the general permit.

Operation of equipment at the WEU-49 pad will not exceed emission thresholds established by either of these permitting programs. EQT will monitor future construction and modification activities at the site closely and will compare any future increase in emissions with the NSR thresholds to ensure these activities will not trigger this program.

*45 CSR 25 – Control of Air Pollution from Hazardous Waste Treatment, Storage, and Disposal Facilities*

No hazardous waste will be burnt at this well site; therefore, it is not subject to this hazardous waste rule.

*45 CSR 30 – Requirements for Operating Permits*

45 CSR 30 applies to the requirements of the federal Title V operating permit program (40 CFR 70). The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP, and 100 tpy of all other regulated pollutants.

The potential emissions of all regulated pollutants are below the corresponding threshold(s) at this facility after the proposed project. Therefore, the wellpad is not a major source for Title V purposes.

*45 CSR 34 – National Emission Standards for Hazardous Air Pollutants (NESHAP)*

45 CSR 34 applies to all registrants that are subject to any of the NESHAP requirements. Excluded from G70-A general permit eligibility are any sources that are subject to NESHAP Subpart HHH.

The following NESHAP included in the G70-A permit are not subject to the WEU-49 facility:

- 40CFR63 Subpart HH (National Emission Standards for Hazardous Air Pollutants from Oil and Natural Gas Production Facilities).
- 40CFR63 Subpart ZZZZ (National Emission Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines)

## FEDERAL REGULATIONS

*40 CFR 60, Subpart OOOO (Standards of Performance for Crude oil and Natural Gas Production, Transmission and Distribution)*

EPA published the NSPS for the oil and gas sector on August 16, 2012. EPA published final amendments to the subpart on September 23, 2013.

Subpart OOOO establishes emission standards and compliance schedules for the control of volatile organic compounds (VOC) and sulfur dioxide (SO<sub>2</sub>) emissions from affected facilities that commence construction, modification or reconstruction after August 23, 2011. The applicable provisions and requirements of Subpart OOOO are included under the G70-A permit.

The only affected facilities expected to be subject to Subpart OOOO located at the WEU-49 production pad are listed below:

- Each gas well affected facility, which is a single natural gas well.

There are several equipment types that will be installed at WEU-49 that do not meet the affected facility definitions as specified by EPA. These include pneumatic controllers and storage vessels.

Pneumatic Controllers: Any pneumatic controller installed at this facility will be intermittent bleed rate devices. Therefore, there will not be any pneumatic controller affected facilities located at this site.

Storage vessels: Based on PTE calculations included within this permit, each storage vessel will be manifolded and routed to an enclosed combustion device such that emissions from each of these tanks are expected to be below 6 tons per year (tpy) of VOC. Therefore, these tanks will not be considered group 2 storage vessel affected facilities as specified in §60.5365(e).

The following NSPS included in the G70-A permit are not applicable to the WEU-49 facility:

- *40 CFR 60 Subpart JJJJ (Standards of Performance for Stationary Spark Ignition Internal Combustion Engines).*

No additional NSPS are expected to be applicable to this facility.





WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
DIVISION OF AIR QUALITY  
601 57<sup>th</sup> Street, SE  
Charleston, WV 25304  
Phone: (304) 926-0475 • [www.dep.wv.gov/daq](http://www.dep.wv.gov/daq)

**APPLICATION FOR GENERAL  
PERMIT REGISTRATION**  
*CONSTRUCT, MODIFY, RELOCATE OR  
ADMINISTRATIVELY UPDATE  
A STATIONARY SOURCE OF AIR POLLUTANTS*

☒ CONSTRUCTION    ☐ MODIFICATION    ☐ RELOCATION    ☐ CLASS I ADMINISTRATIVE UPDATE  
☐ CLASS II ADMINISTRATIVE UPDATE

**CHECK WHICH TYPE OF GENERAL PERMIT REGISTRATION YOU ARE APPLYING FOR:**

- |   |   |
|---|---|
| <input type="checkbox"/> <b>G10-D</b> – Coal Preparation and Handling                                   | <input type="checkbox"/> <b>G40-C</b> – Nonmetallic Minerals Processing                             |
| <input type="checkbox"/> <b>G20-B</b> – Hot Mix Asphalt   | <input type="checkbox"/> <b>G50-B</b> – Concrete Batch  |
| <input type="checkbox"/> <b>G30-D</b> – Natural Gas Compressor Stations                                 | <input type="checkbox"/> <b>G60-C</b> – Class II Emergency Generator                                |
| <input type="checkbox"/> <b>G33-A</b> – Spark Ignition Internal Combustion Engines                      | <input type="checkbox"/> <b>G65-C</b> – Class I Emergency Generator                                 |
| <input type="checkbox"/> <b>G35-A</b> – Natural Gas Compressor Stations (Flare/Glycol Dehydration Unit) | <input checked="" type="checkbox"/> <b>G70-A</b> – Class II Oil and Natural Gas Production Facility |

**SECTION I. GENERAL INFORMATION**

1. Name of applicant (as registered with the WV Secretary of State's Office): <b>EQT Production Company</b>		2. Federal Employer ID No. (FEIN): <b>25-0724685</b>
3. Applicant's mailing address: <b>625 Liberty Avenue, Suite 1700 Pittsburgh, PA 15222</b>	4. Applicant's physical address:	
5. If applicant is a subsidiary corporation, please provide the name of parent corporation:		
6. <b>WV BUSINESS REGISTRATION.</b> Is the applicant a resident of the State of West Virginia? <input checked="" type="checkbox"/> <b>YES</b> <input type="checkbox"/> <b>NO</b> - IF <b>YES</b> , provide a copy of the Certificate of <b>Incorporation/ Organization / Limited Partnership</b> (one page) including any name change amendments or other Business Registration Certificate as <b>Attachment A</b> . - IF <b>NO</b> , provide a copy of the <b>Certificate of Authority / Authority of LLC / Registration</b> (one page) including any name change amendments or other Business Certificate as <b>Attachment A</b> .		

**SECTION II. FACILITY INFORMATION**

7. Type of plant or facility (stationary source) to be constructed, modified, relocated or administratively updated (e.g., coal preparation plant, primary crusher, etc.): <b>Class II Oil and Natural Gas Production Facility</b>	8a. Standard Industrial Classification Classification (SIC) code: <b>1311</b>	AND	8b. North American Industry System (NAICS) code: <b>211111</b>
9. DAQ Plant ID No. (for existing facilities only): <b>N/A</b>	10. List all current 45CSR13 and other General Permit numbers associated with this process (for existing facilities only): <b>N/A</b>		

**A: PRIMARY OPERATING SITE INFORMATION**

<p>11A. Facility name of primary operating site:</p> <p><b>WEU-49 Natural Gas Production Facility</b></p>	<p>12A. Address of primary operating site:</p> <p>Mailing:  <b>625 Liberty Avenue, Suite 1700</b>  <b>Pittsburgh, PA 15222</b></p>	
<p>13A. Does the applicant own, lease, have an option to buy, or otherwise have control of the proposed site? <span style="float:right"><input checked="" type="checkbox"/> <b>YES</b>    <input type="checkbox"/> <b>NO</b></span></p> <p>- IF <b>YES</b>, please explain: <b>The applicant leases the proposed site.</b></p> <p>- IF <b>NO</b>, YOU ARE NOT ELIGIBLE FOR A PERMIT FOR THIS SOURCE.</p>		
<p>14A. <input type="checkbox"/> For <b>Modifications or Administrative Updates</b> at an existing facility, please provide directions to the present location of the facility from the nearest state road;</p> <p>- For Construction or Relocation permits, please provide directions to the proposed new site location from the nearest state road. Include a <b>MAP</b> as <b>Attachment F</b>.</p> <p>From West Union take WV-18S and then turn right to take US-50 W. Follow US-50 W for 2.6 miles, before turning left onto Arnolds Creek Road/Central Station Road/Right Fork Run Road. Continue 0.7 miles, before turning left onto Left Fork Run Road. Travel for 2.1 miles, and turn onto an unnamed access road on the left. The WEU-49 natural gas production site is located alongside this access road.</p>		
<p>15A. Nearest city or town:</p> <p><b>West Union</b></p>	<p>16A. County:</p> <p><b>Doddridge</b></p>	<p>17A. UTM Coordinates:</p> <p>Northing (KM): <b>518.413</b>  Easting (KM): <b>4,345.066</b>  Zone: <b>17</b></p>
<p>18A. Briefly describe the proposed new operation or change (s) to the facility:</p> <p><b>The WEU-49 Natural Gas Production Facility will be a new production site expected to be in production in June 2015.</b></p>		<p>19A. Latitude &amp; Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):</p> <p>Latitude: <b>39.25473</b>  Longitude: <b>-80.78660</b></p>

### SECTION III. ATTACHMENTS AND SUPPORTING DOCUMENTS

23. Include a check payable to WVDEP – Division of Air Quality with the appropriate **application fee** (per 45CSR22 and 45CSR13).

24. Include a **Table of Contents** as the first page of your application package.

All of the required forms and additional information can be found under the Permitting Section (General Permits) of DAQ's website, or requested by phone.

25. Please check all attachments included with this permit application. Please refer to the appropriate reference document for an explanation of the attachments listed below.

- ☒ ATTACHMENT A : CURRENT BUSINESS CERTIFICATE
- ☒ ATTACHMENT B: PROCESS DESCRIPTION
- ☒ ATTACHMENT C: DESCRIPTION OF FUGITIVE EMISSIONS
- ☒ ATTACHMENT D: PROCESS FLOW DIAGRAM
- ☒ ATTACHMENT E: PLOT PLAN
- ☒ ATTACHMENT F: AREA MAP
- ☒ ATTACHMENT G: EQUIPMENT DATA SHEETS AND REGISTRATION SECTION APPLICABILITY FORM
- ☒ ATTACHMENT H: AIR POLLUTION CONTROL DEVICE SHEETS
- ☒ ATTACHMENT I: EMISSIONS CALCULATIONS
- ☒ ATTACHMENT J: CLASS I LEGAL ADVERTISEMENT
- ☐ ATTACHMENT K: ELECTRONIC SUBMITTAL **(NOT APPLICABLE)**
- ☒ ATTACHMENT L: GENERAL PERMIT REGISTRATION APPLICATION FEE
- ☐ ATTACHMENT M: SITING CRITERIA WAIVER **(NOT APPLICABLE)**
- ☐ ATTACHMENT N: MATERIAL SAFETY DATA SHEETS (MSDS) **(NOT APPLICABLE)**
- ☒ ATTACHMENT O: EMISSIONS SUMMARY SHEETS
- ☐ OTHER SUPPORTING DOCUMENTATION NOT DESCRIBED ABOVE (Equipment Drawings, Aggregation Discussion, etc.) **(NOT APPLICABLE)**

Please mail an original and two copies of the complete General Permit Registration Application with the signature(s) to the DAQ Permitting Section, at the address shown on the front page of this application. Please **DO NOT** fax permit applications. For questions regarding applications or West Virginia Air Pollution Rules and Regulations, please refer to the website shown on the front page of the application or call the phone number also provided on the front page of the application.

#### SECTION IV. CERTIFICATION OF INFORMATION

This General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of a Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, Emission Inventory, Certified Emission Statement, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. Any administratively incomplete or improperly signed or unsigned Registration Application will be returned to the applicant.

FOR A CORPORATION (domestic or foreign)

☒ I certify that I am a President, Vice President, Secretary, Treasurer or in charge of a principal business function of the corporation

FOR A PARTNERSHIP

☐ I certify that I am a General Partner

FOR A LIMITED LIABILITY COMPANY

☐ I certify that I am a General Partner or General Manager

FOR AN ASSOCIATION

☐ I certify that I am the President or a member of the Board of Directors

FOR A JOINT VENTURE

☐ I certify that I am the President, General Partner or General Manager

FOR A SOLE PROPRIETORSHIP

☐ I certify that I am the Owner and Proprietor

☐ I hereby certify that (please print or type) \_\_\_\_\_

*is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Office of Air Quality immediately, and/or,*

*I hereby certify that all information contained in this General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible*

Signature \_\_\_\_\_

(please use blue ink)

Responsible Official

Date

Name & Title **Kenneth Kirk, Executive Vice President**

(please print or type)

Signature \_\_\_\_\_

(please use blue ink)

Authorized Representative (if applicable)

Date

Applicant's Name **R. Alex Bosiljevac Environmental Coordinator**

Phone & Fax **(412) 395-3699**

Phone

Fax

Email **abosiljevac@eqt.com**

## **Table of Contents**

<b>ATTACHMENT A</b>	BUSINESS CERTIFICATE
<b>ATTACHMENT B</b>	PROCESS DESCRIPTION
<b>ATTACHMENT C</b>	DESCRIPTION OF FUGITIVE EMISSIONS
<b>ATTACHMENT D</b>	PROCESS FLOW DIAGRAM
<b>ATTACHMENT E</b>	PLOT PLAN
<b>ATTACHMENT F</b>	AREA MAP
<b>ATTACHMENT G</b>	EQUIPMENT DATA SHEETS AND REGISTRATION SECTION APPLICABILITY FORM
<b>ATTACHMENT H</b>	AIR POLLUTION CONTROL DEVICE SHEETS
<b>ATTACHMENT I</b>	EMISSION CALCULATIONS
<b>ATTACHMENT J</b>	CLASS I LEGAL ADVERTISEMENT
<b>ATTACHMENT K</b>	ELECTRONIC SUBMITTAL <b>(NOT APPLICABLE)</b>
<b>ATTACHMENT L</b>	GENERAL PERMIT REGISTRATION APPLICATION FE
<b>ATTACHMENT M</b>	SITTING CRITERIA WAIVER <b>(NOT APPLICABLE)</b>
<b>ATTACHMENT N</b>	MATERIAL SAFETY DATA SHEETS (MSDS) <b>(NOT APPLICABLE)</b>
<b>ATTACHMENT O</b>	EMISSION SUMMARY SHEETS
	OTHER SUPPORTING DOCUMENTATION NOT DESCRIBED ABOVE <b>(NOT APPLICABLE)</b>

# **Attachment A**

**WEST VIRGINIA  
STATE TAX DEPARTMENT  
BUSINESS REGISTRATION  
CERTIFICATE**

ISSUED TO:  
**EQT PRODUCTION COMPANY  
625 LIBERTY AVE 1700  
PITTSBURGH, PA 15222-3114**

**BUSINESS REGISTRATION ACCOUNT NUMBER: 1022-8081**

This certificate is issued on: 08/4/2010

*This certificate is issued by  
the West Virginia State Tax Commissioner  
in accordance with Chapter 11, Article 12, of the West Virginia Code*

*The person or organization identified on this certificate is registered  
to conduct business in the State of West Virginia at the location above.*

This certificate is not transferrable and must be displayed at the location for which issued.  
This certificate shall be permanent until cessation of the business for which the certificate of registration  
was granted or until it is suspended, revoked or cancelled by the Tax Commissioner.

Change in name or change of location shall be considered a cessation of the business and a new  
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.  
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of  
this certificate displayed at every job site within West Virginia.

## **Attachment B**



## **Attachment B**

### **Process Description**

This permit application is being filed for EQT Production Company and addresses operational activities associated with the WEU-49 natural gas production site. Incoming raw natural gas from the seven (7) wells enters the site through a pipeline. The raw gas is first routed through the sand traps to remove any sediment. Fluids from these sand traps are manually blowdown to the sand trap blowdown tank (S021), as needed. From the sand traps, raw gas is routed through line heaters (S001-S007) to assist with the phase separation process in the downstream three-phase separators. In the separator, produced fluids are removed from the raw gas and transferred to the produced fluids storage tanks (S008-S015). Emissions from the produced fluids tanks and sand trap blowdown tank are directed to one of the two enclosed combustion units (C017, C018) and burnt. Produced fluids are pumped into a tank truck (S016) on an as-needed basis and are disposed of off-site. Vapors during truck loading will be controlled by either of the two enclosed combustion units.

Two thermoelectric generation units (S019, S020) are operated and provide power to the WEU-49 natural gas production site.

A process flow diagram is included as Attachment D.

# **Attachment C**

## **Attachment C**

### **G70-A General Permit Description of Fugitive Emissions**

This permit application is being filed for EQT Production Company and addresses operational activities associated with the WEU-49 natural gas production site. Fugitive emissions on the site are generated from a number of sources, including an unpaved haul road and equipment leaks. These fugitive emission sources cannot be controlled by air pollution control devices. Emission levels for fugitive emissions were calculated using AP-42 emission factors, results of a gas analysis, and 40 CFR 98 Subpart W factors and equipment counts. A summary of the fugitive emissions on the WEU-49 natural gas production site can be found in Attachment O – Emissions Summary Sheet.

# **Attachment D**

Attachment D



WEU 49 Natural Gas Production

Process Flow Diagram



# **Attachment E**


Attachment E  
Plot Plan  
EQT WEU 49 Natural Gas Production Site

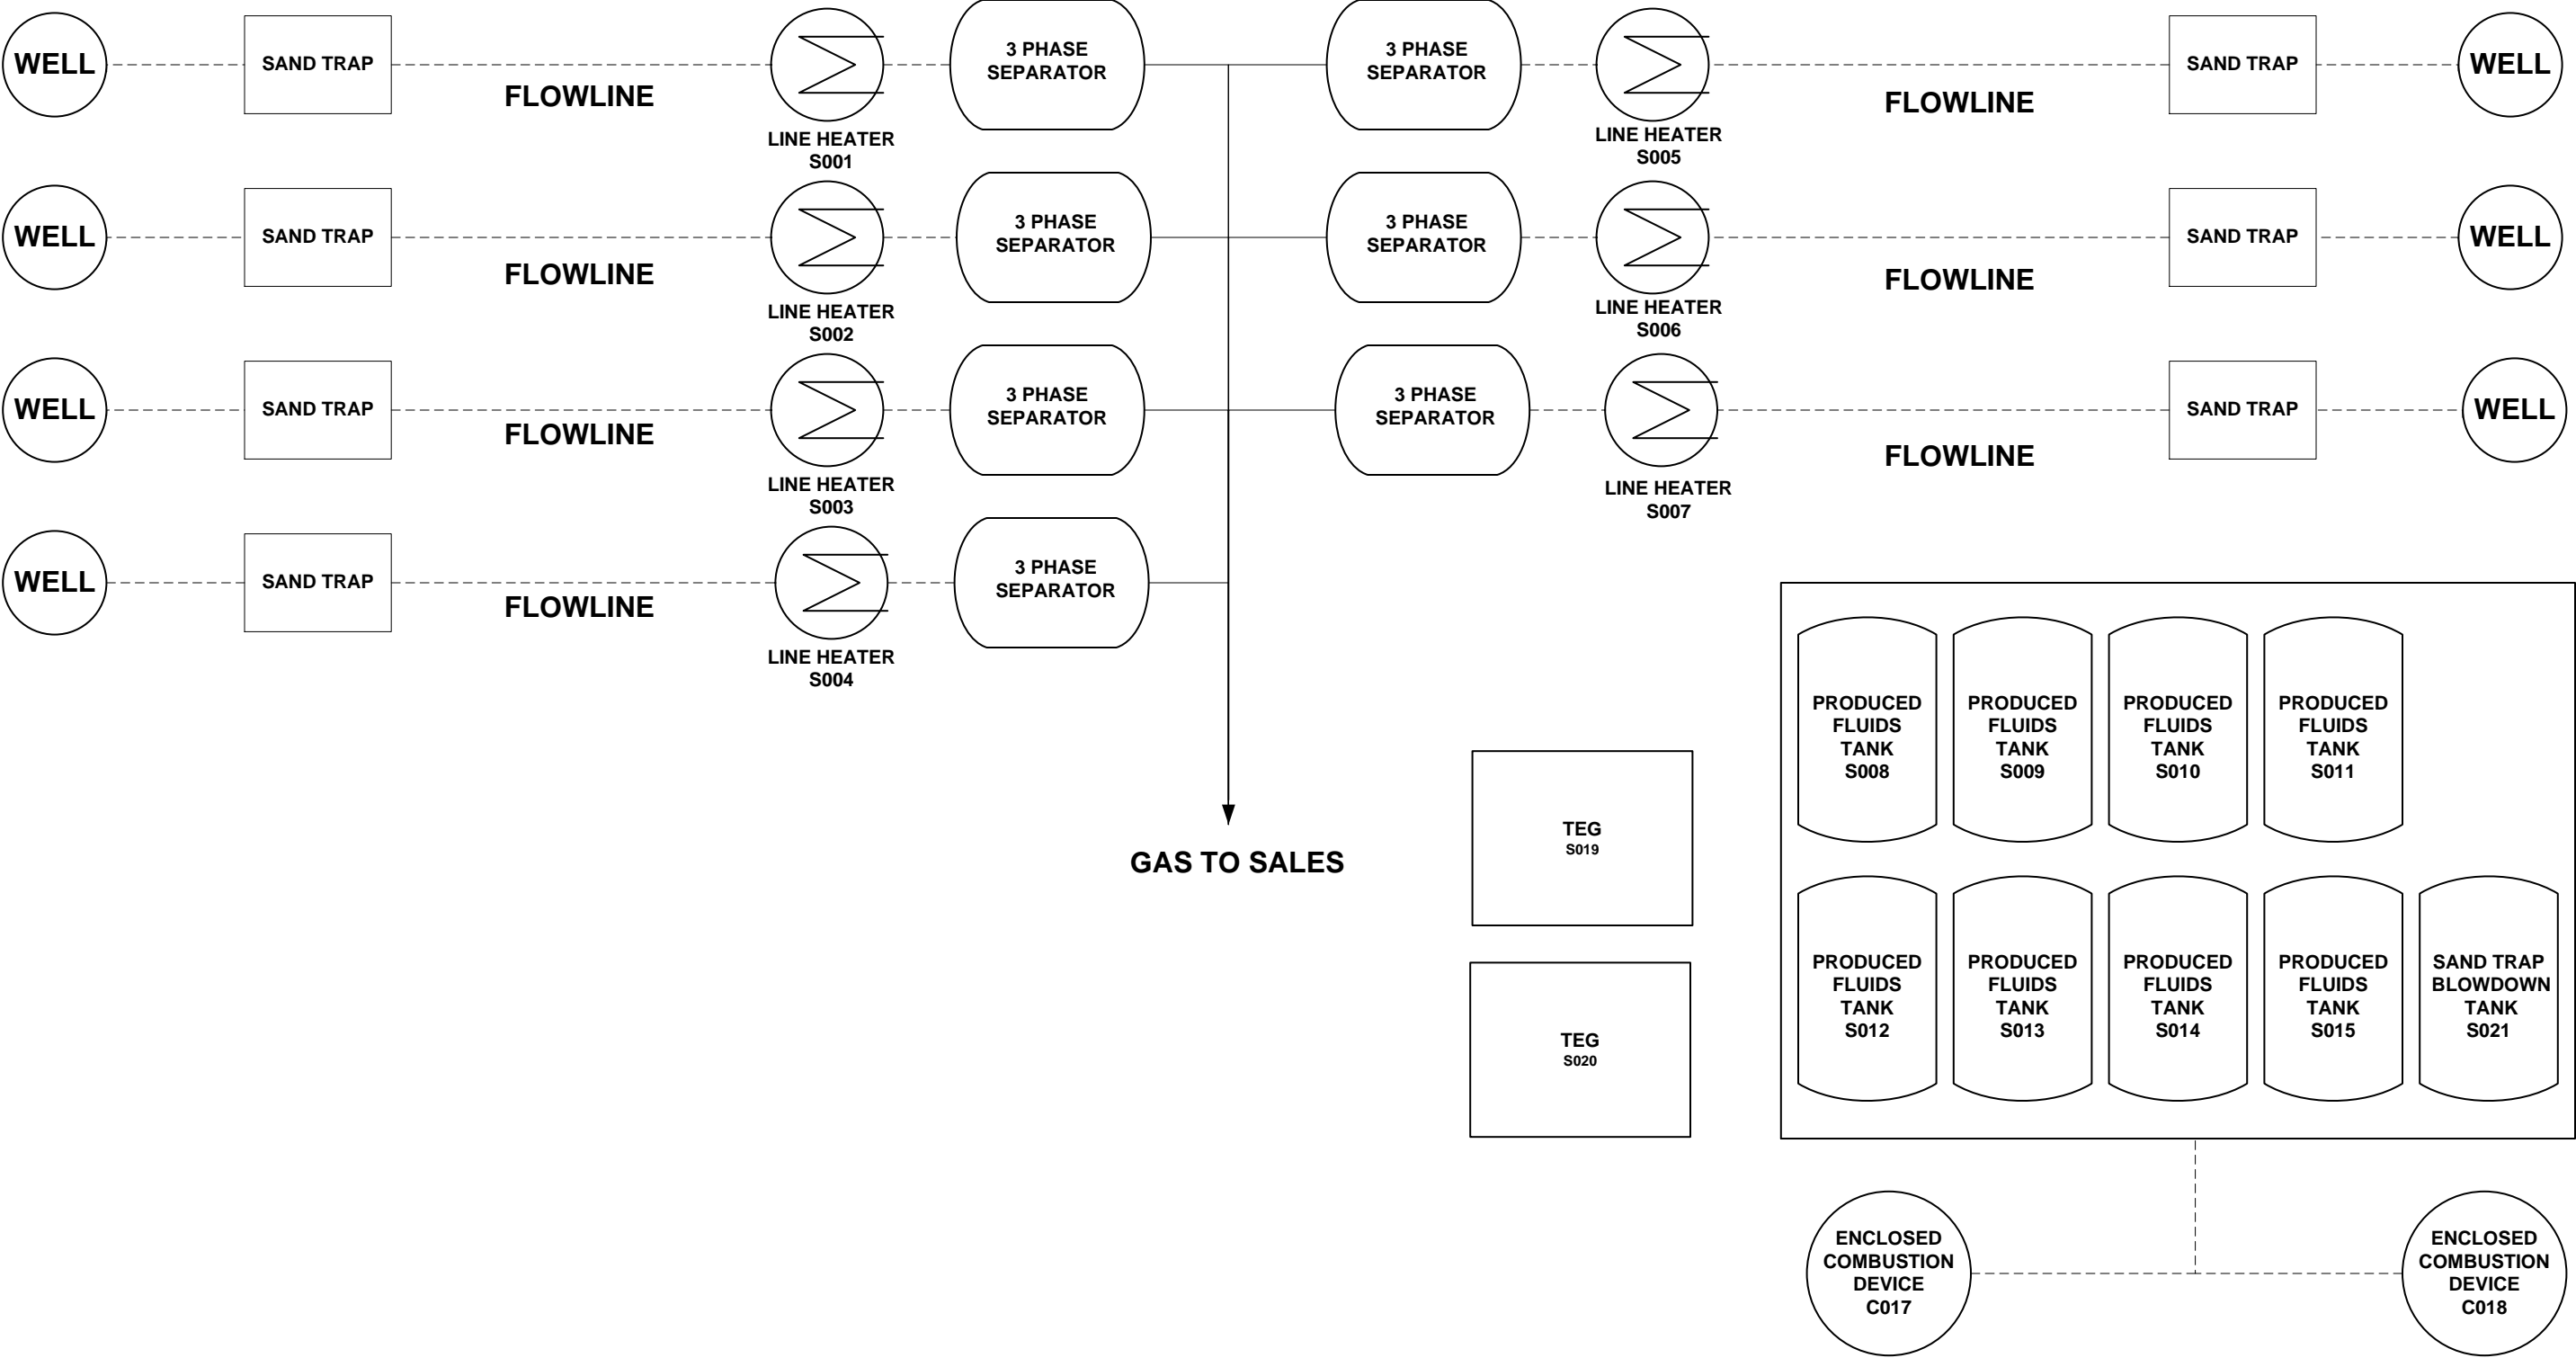


TRUCK ENTRANCE

# **Attachment F**



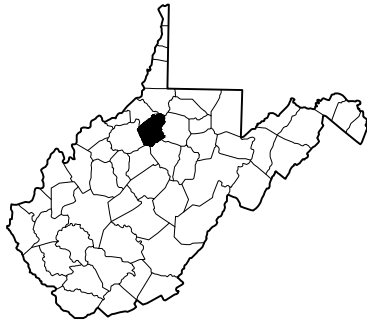

WEST VIRGINIA

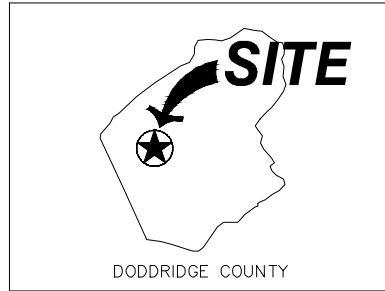

DODDRIDGE COUNTY



LAT. 39.25473 LON. -80.78660  
CITY OF WEST UNION  
DODDRIDGE COUNTY  
WEST VIRGINIA



SCALE (IN FEET)



## SITE LOCATION MAP

ADAPTED FROM USGS

REVISIONS ARE TO BE MADE ON THE CADD FILE ONLY



Drawn By  
MLB/9-19-14

### EQT PRODUCTION COMPANY

WEU-49 WELL PAD  
WEST UNION, WEST VIRGINIA

Environmental Resources Management

CADD Review

CHK'D MC

0250395

ATTACHMENT F

# **Attachment G**

## General Permit G70-A Registration Section Applicability Form

General Permit G70-A was developed to allow qualified applicants to seek registration for a variety of sources. These sources include natural gas well affected facilities, storage tanks, natural gas-fired compressor engines (RICE), natural gas producing units, natural gas-fired in-line heaters, pneumatic controllers, heater treaters, tank truck loading, glycol dehydration units, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-A allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

Section 5	Natural Gas Well Affected Facility	<input checked="" type="checkbox"/>
Section 6	Storage Vessels*	<input checked="" type="checkbox"/>
Section 7	Gas Producing Units, In-Line Heaters, Heater Treaters, and Glycol Dehydration Reboilers	<input checked="" type="checkbox"/>
Section 8	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO)	<input type="checkbox"/>
Section 9	<i>Reserved</i>	<input type="checkbox"/>
Section 10	Natural gas-fired Compressor Engine(s) (RICE) **	<input type="checkbox"/>
Section 11	Tank Truck Loading Facility ***	<input checked="" type="checkbox"/>
Section 12	Standards of Performance for Storage Vessel Affected Facilities (NSPS, Subpart OOOO)	<input type="checkbox"/>
Section 13	Standards of Performance for Stationary Spark Ignition Internal Combustion Engines (NSPS, Subpart JJJJ)	<input type="checkbox"/>
Section 14	Control Devices not subject to NSPS, Subpart OOOO	<input checked="" type="checkbox"/>
Section 15	National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines (40CFR63, Subpart ZZZZ)	<input type="checkbox"/>
Section 16	Glycol Dehydration Units	<input type="checkbox"/>
Section 17	Dehydration Units With Exemption from NESHAP Standard, Subpart HH § 63.764(d) (40CFR63, Subpart HH)	<input type="checkbox"/>
Section 18	Dehydration Units Subject to NESHAP Standard, Subpart HH and Not Located Within an UA/UC (40CFR63, Subpart HH)	<input type="checkbox"/>
Section 19	Dehydration Units Subject to NESHAP Standard, Subpart HH and Located Within an UA/UC (40CFR63, Subpart HH)	<input type="checkbox"/>

\* Applicants that are subject to Section 6 may also be subject to Section 12 if the applicant is subject to the NSPS, Subpart OOOO control requirements or the applicable control device requirements of Section 14.

\*\* Applicants that are subject to Section 10 may also be subject to the applicable RICE requirements of Section 13 and/or Section 15.

\*\*\* Applicants that are subject to Section 11 may also be subject to control device requirements of Section 14.

# Attachment G

## Emission Source Data Sheets

**Emission Units Table**  
**(includes all emission units and air pollution control devices**  
**that will be part of this permit application review, regardless of permitting status)**

Emission Unit ID <sup>1</sup>	Emission Point ID <sup>2</sup>	Emission Unit Description	Year Installed/Modified	Design Capacity	Type <sup>3</sup> and Date of Change	Control Device <sup>4</sup>
S001	E001	Line Heater	2015	1.00 mmBtu/hr	New	NA
S002	E002	Line Heater	2015	1.00 mmBtu/hr	New	NA
S003	E003	Line Heater	2015	1.00 mmBtu/hr	New	NA
S004	E004	Line Heater	2015	1.00 mmBtu/hr	New	NA
S005	E005	Line Heater	2015	1.00 mmBtu/hr	New	NA
S006	E006	Line Heater	2015	1.00 mmBtu/hr	New	NA
S007	E007	Line Heater	2015	1.00 mmBtu/hr	New	NA
S008	E017 E018	Produced Fluid Tank	2015	400 bbl	New	C017 C018
S009	E017 E018	Produced Fluid Tank	2015	400 bbl	New	C017 C018
S010	E017 E018	Produced Fluid Tank	2015	400 bbl	New	C017 C018
S011	E017 E018	Produced Fluid Tank	2015	400 bbl	New	C017 C018
S012	E017 E018	Produced Fluid Tank	2015	400 bbl	New	C017 C018
S013	E017 E018	Produced Fluid Tank	2015	400 bbl	New	C017 C018
S014	E017 E018	Produced Fluid Tank	2015	400 bbl	New	C017 C018
S015	E017 E018	Produced Fluid Tank	2015	400 bbl	New	C017 C018
S016	E017 E018	Tank Truck Loading Rack	2015	15,965 gal/day	New	NA
C017	E017	Enclosed Combustion Device	2015	11.66 mmBtu/hr	New	NA
C018	E018	Enclosed Combustion Device	2015	11.66 mmBtu/hr	New	NA
S019	E019	Thermal Electric Generator	2015	0.013 mmBtu/hr	New	NA
S020	E020	Thermal Electric Generator	2015	0.013 mmBtu/hr	New	NA
S021	E017 E018	Sand Trap Blow Tank	2015	140 bbl	New	C017 C018

<sup>1</sup> For Emission Units (or Sources) use the following numbering system: 1S, 2S, 3S,... or other appropriate designation.

<sup>2</sup> For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation.

<sup>3</sup> New, modification, removal

<sup>4</sup> For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

# Attachment G

## Emission Source Data Sheets

### NATURAL GAS WELL AFFECTED FACILITY DATA SHEET

Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification, or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).

Please provide the API number(s) for each NG well at this facility:
<b>API Number</b>
047-017-06443
047-017-06444
047-017-06445
047-017-06446
047-017-06447
047-017-06448
047-017-06449

*Note: This is the same API well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).*

*Every oil and gas well permitted in West Virginia since 1929 has been issued an API (American Petroleum Institute) number. This API is used by agencies to identify and track oil and gas wells.*

*The API number has the following format: 047-001-00001*

*Where,*

*047 = State code. The state code for WV is 047.*

*001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).*

*00001 = Well number. Each well will have a unique well number.*

# Attachment G

## Emission Source Data Sheets

### STORAGE VESSEL EMISSION UNIT DATA SHEET

*Provide the following information for each new or modified bulk liquid storage tank.*

#### I. GENERAL INFORMATION (required)

1. Bulk Storage Area Name <b>WEU-49 Storage Tank Area</b>	2. Tank Name <b>Produced Fluid Tanks (S008-S015)</b>
3. Emission Unit ID number <b>S008-S015</b>	4. Emission Point ID number <b>E017 or E018</b>
5. Date Installed or Modified ( <i>for existing tanks</i> ) <b>6/1/2015 (anticipated)</b>	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other
7A. Description of Tank Modification ( <i>if applicable</i> ): <b>NA</b>	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> <b>No</b>	
7C. Provide any limitations on source operation affecting emissions. (production variation, etc.) <b>NA</b>	

#### II. TANK INFORMATION (required)

8. Design Capacity ( <i>specify barrels or gallons</i> ). Use the internal cross-sectional area multiplied by internal height. <b>16,800 gallons</b>	
9A. Tank Internal Diameter (ft.) <b>12</b>	9B. Tank Internal Height (ft.) <b>20</b>
10A. Maximum Liquid Height (ft.) <b>20</b>	10B. Average Liquid Height (ft.) <b>10</b>
11A. Maximum Vapor Space Height (ft.) <b>20</b>	11B. Average Vapor Space Height (ft.) <b>10</b>
12. Nominal Capacity ( <i>specify barrels or gallons</i> ). This is also known as "working volume. <b>16,800 gallons</b>	
13A. Maximum annual throughput (gal/yr) <b>7,361,159</b>	13B. Maximum daily throughput (gal/day) <b>20,168</b>
14. Number of tank turnovers per year <b>439</b>	15. Maximum tank fill rate (gal/min) <b>14.01</b>
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> <b>Fixed Roof</b> <input checked="" type="checkbox"/> <b>vertical</b> <input type="checkbox"/> horizontal <input checked="" type="checkbox"/> <b>flat roof</b> <input type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe)  <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical <input type="checkbox"/> Underground <input type="checkbox"/> Other (describe)	

#### III. TANK CONSTRUCTION AND OPERATION INFORMATION (*check which one applies*)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> <b>Refer to the responses to items 19 – 26 in section VII</b>

# Attachment G

## Emission Source Data Sheets

### IV. SITE INFORMATION *(check which one applies)*

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> <b>Refer to the responses to items 27 – 33 in section VII</b>

### V. LIQUID INFORMATION *(check which one applies)*

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> <b>Refer to the responses to items 34 – 39 in section VII</b>

### VI. EMISSIONS AND CONTROL DEVICE DATA (required)

40. Emission Control Devices (check as many as apply):									
<input type="checkbox"/> Does Not Apply			<input type="checkbox"/> Rupture Disc (psig)						
<input type="checkbox"/> Carbon Adsorption <sup>1</sup>			<input type="checkbox"/> Inert Gas Blanket of _____						
<input checked="" type="checkbox"/> Vent to Vapor Combustion Device <sup>1</sup> (vapor combustors, flares, thermal oxidizers)									
<input type="checkbox"/> Condenser <sup>1</sup>			<input type="checkbox"/> Conservation Vent (psig						
<input type="checkbox"/> Other <sup>1</sup> (describe)			Vacuum Setting			Pressure Setting			
<input type="checkbox"/> Emergency Relief Valve (psig)									
<sup>1</sup> Complete appropriate Air Pollution Control Device Sheet									

41. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).

Material Name and CAS No.	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method <sup>1</sup>
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
Please Refer to Calculations Provided in Attachment I.									

<sup>1</sup> EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)  
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

### SECTION VII (required if did not provide TANKS Summary Sheets)

<b>TANK CONSTRUCTION AND OPERATION INFORMATION</b>		
19. Tank Shell Construction:		
<input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> <b>Other WELDED</b>		
20A. Shell Color: <b>Green</b>	20B. Roof Color: <b>Green</b>	20C. Year Last Painted: <b>NA</b>
21. Shell Condition (if metal and unlined):		

## Attachment G

### Emission Source Data Sheets

<input checked="" type="checkbox"/> <b>No Rust</b> <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		22B. If yes, operating temperature:	
22C. If yes, how is heat provided to tank?			
23. Operating Pressure Range (psig): <b>-0.05 oz. to 10 oz.</b>			
24. Is the tank a <b>Vertical Fixed Roof Tank</b> ? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		24A. If yes, for dome roof provide radius (ft): <b>NA</b>	
24B. If yes, for cone roof, provide slope (ft/ft):			
25. Complete item 25 for <b>Floating Roof Tanks</b> <input type="checkbox"/> <b>Does not apply</b> <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type ( <i>check one</i> ): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? ( <i>check one</i> ) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for <b>Internal Floating Roof Tanks</b> <input checked="" type="checkbox"/> <b>Does not apply</b>			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft <sup>2</sup> ):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
<b>SITE INFORMATION:</b>			
27. Provide the city and state on which the data in this section are based: <b>Charleston, WV</b>			
28. Daily Avg. Ambient Temperature (°F): <b>70 °F</b>		29. Annual Avg. Maximum Temperature (°F): <b>65.5 °F</b>	
30. Annual Avg. Minimum Temperature (°F): <b>44.0 °F</b>		31. Avg. Wind Speed (mph): <b>18 mph</b>	
32. Annual Avg. Solar Insulation Factor (BTU/ft <sup>2</sup> -day): <b>1,123</b>		33. Atmospheric Pressure (psia): <b>14.70</b>	
<b>LIQUID INFORMATION: Refer to ProMax Simulation Sheets in Attachment I.</b>			



# Attachment G

## Emission Source Data Sheets

### STORAGE VESSEL EMISSION UNIT DATA SHEET

*Provide the following information for each new or modified bulk liquid storage tank.*

#### I. GENERAL INFORMATION (required)

1. Bulk Storage Area Name <b>WEU-49 Storage Tank Area</b>	2. Tank Name <b>Sand Trap Blowdown Tank</b>
3. Emission Unit ID number <b>S021</b>	4. Emission Point ID number <b>E017 or E018</b>
5. Date Installed or Modified ( <i>for existing tanks</i> ) <b>6/1/2015 (anticipated)</b>	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other
7A. Description of Tank Modification ( <i>if applicable</i> ): <b>NA</b>	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> <b>No</b>	
7C. Provide any limitations on source operation affecting emissions. (production variation, etc.) <b>NA</b>	

#### II. TANK INFORMATION (required)

8. Design Capacity ( <i>specify barrels or gallons</i> ). Use the internal cross-sectional area multiplied by internal height. <b>16,800 gallons</b>	
9A. Tank Internal Diameter (ft.) <b>12</b>	9B. Tank Internal Height (ft.) <b>20</b>
10A. Maximum Liquid Height (ft.) <b>20</b>	10B. Average Liquid Height (ft.) <b>10</b>
11A. Maximum Vapor Space Height (ft.) <b>20</b>	11B. Average Vapor Space Height (ft.) <b>10</b>
12. Nominal Capacity ( <i>specify barrels or gallons</i> ). This is also known as "working volume. <b>5,800 gallons</b>	
13A. Maximum annual throughput (gal/yr) <b>305,760</b>	13B. Maximum daily throughput (gal/day) <b>838</b>
14. Number of tank turnovers per year <b>52</b>	15. Maximum tank fill rate (gal/min) <b>14</b>
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> <b>Fixed Roof</b> <input checked="" type="checkbox"/> <b>vertical</b> ___ horizontal      ___ flat roof      ___ cone roof <input checked="" type="checkbox"/> <b>dome roof</b> ___ other (describe)  <input type="checkbox"/> External Floating Roof      ___ pontoon roof      ___ double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof      ___ vertical column support      ___ self-supporting <input type="checkbox"/> Variable Vapor Space      ___ lifter roof      ___ diaphragm <input type="checkbox"/> Pressurized      ___ spherical      ___ cylindrical <input type="checkbox"/> Underground <input type="checkbox"/> Other (describe)	

#### III. TANK CONSTRUCTION AND OPERATION INFORMATION (*check which one applies*)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
---

## Attachment G

### Emission Source Data Sheets

☐ Refer to the responses to items 19 – 26 in section VII

#### IV. SITE INFORMATION (check which one applies)

☐ Refer to enclosed TANKS Summary Sheets

☒ Refer to the responses to items 27 – 33 in section VII

## V. LIQUID INFORMATION (check which one applies)

☐ Refer to enclosed TANKS Summary Sheets

☒ Refer to the responses to items 34 – 39 in section VII

## VI. EMISSIONS AND CONTROL DEVICE DATA (required)

40. Emission Control Devices (check as many as apply):

☐ Does Not Apply☐ Rupture Disc (psig)

☐ Carbon Adsorption<sup>1</sup>

☐ Inert Gas Blanket of \_\_\_\_\_☒ Vent to Vapor Combustion Device<sup>1</sup> (vapor combustors, flares, thermal oxidizers)Condenser<sup>1</sup>☐ Conservation Vent (psig)☐ Other<sup>1</sup> (describe) \_\_\_\_\_

Vacuum Setting	Pressure Setting
0.05	0.05
0.10	0.10
0.15	0.15
0.20	0.20
0.25	0.25
0.30	0.30
0.35	0.35
0.40	0.40
0.45	0.45
0.50	0.50
0.55	0.55
0.60	0.60
0.65	0.65
0.70	0.70
0.75	0.75
0.80	0.80
0.85	0.85
0.90	0.90
0.95	0.95
1.00	1.00

☐ Emergency Relief Valve (psig)

<sup>1</sup> Complete appropriate Air Pollution Control Device Sheet

41. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).

[illegible]

Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

**SECTION VII (required if did not provide TANKS Summary Sheets)**

## TANK CONSTRUCTION AND OPERATION INFORMATION

### 19. Tank Shell Construction:

☐ Riveted    ☐ Gunitite lined    ☐ Epoxy-coated rivets    ☒ **Other WELDED**

20A. Shell Color: **Green**

20B. Roof Color: **Green**

20C. Year Last Painted: **NA**

## Attachment G

### Emission Source Data Sheets

21. Shell Condition (if metal and unlined): <input checked="" type="checkbox"/> <b>No Rust</b> <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable			
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		22B. If yes, operating temperature:	
22C. If yes, how is heat provided to tank?			
23. Operating Pressure Range (psig): <b>-0.05 oz. to 10 oz.</b>			
24. Is the tank a <b>Vertical Fixed Roof Tank</b> ? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		24A. If yes, for dome roof provide radius (ft): <b>5 ft.</b>	
		24B. If yes, for cone roof, provide slope (ft/ft):	
25. Complete item 25 for <b>Floating Roof Tanks</b> <input type="checkbox"/> <b>Does not apply</b> <input checked="" type="checkbox"/>			
25A. Year Internal Floaters Installed:			
25B. Primary Seal Type ( <i>check one</i> ): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? ( <i>check one</i> ) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for <b>Internal Floating Roof Tanks</b> <input type="checkbox"/> <b>Does not apply</b> <input checked="" type="checkbox"/>			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft <sup>2</sup> ):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
<b>SITE INFORMATION:</b>			
27. Provide the city and state on which the data in this section are based: <b>Charleston, WV</b>			
28. Daily Avg. Ambient Temperature (°F): <b>70 °F</b>		29. Annual Avg. Maximum Temperature (°F): <b>65.5 °F</b>	
30. Annual Avg. Minimum Temperature (°F): <b>44.0 °F</b>		31. Avg. Wind Speed (mph): <b>18 mph</b>	
32. Annual Avg. Solar Insulation Factor (BTU/ft <sup>2</sup> -day): <b>1,123</b>		33. Atmospheric Pressure (psia): <b>14.70</b>	
<b>LIQUID INFORMATION: Refer to ProMax Simulation Sheets in Attachment I.</b>			

# Attachment G

## Emission Source Data Sheets

### NATURAL GAS FIRED FUEL BURNING UNITS EMISSION DATA SHEET

*Complete the information on this data for each Gas Producing Unit(s), Heater Treater(s), and in-line heater(s) at the production pad. Reboiler information should be entered on the Glycol Dehydration Emission Unit Data Sheet.*

Emission Unit ID # <sup>1</sup>	Emission Point ID# <sup>2</sup>	Emission Unit Description (Manufacturer / Model #)	Year Installed/Modified	Type <sup>3</sup> and Date of Change	Control Device <sup>4</sup>	Design Heat Input (mmBtu/hr) <sup>5</sup>	Fuel Heating Value (Btu/scf) <sup>6</sup>
<b>S001</b>	<b>E001</b>	<b>Line Heater</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>1.00</b>	<b>1,088</b>
<b>S002</b>	<b>E002</b>	<b>Line Heater</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>1.00</b>	<b>1,088</b>
<b>S003</b>	<b>E003</b>	<b>Line Heater</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>1.00</b>	<b>1,088</b>
<b>S004</b>	<b>E004</b>	<b>Line Heater</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>1.00</b>	<b>1,088</b>
<b>S005</b>	<b>E005</b>	<b>Line Heater</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>1.00</b>	<b>1,088</b>
<b>S006</b>	<b>E006</b>	<b>Line Heater</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>1.00</b>	<b>1,088</b>
<b>S007</b>	<b>E007</b>	<b>Line Heater</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>1.00</b>	<b>1,088</b>
<b>S019</b>	<b>E019</b>	<b>TEG</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>0.013</b>	<b>1,088</b>
<b>S020</b>	<b>E020</b>	<b>TEG</b>	<b>2015</b>	<b>New</b>	<b>NA</b>	<b>0.013</b>	<b>1,088</b>

<sup>1</sup> Enter the appropriate Emission Unit (or Sources) identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the *Glycol Dehydration Unit Data Sheet*.

<sup>2</sup> Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

<sup>3</sup> New, modification, removal

<sup>4</sup> Complete appropriate air pollution control device sheet for any control device.

<sup>5</sup> Enter design heat input capacity in mmBtu/hr.

<sup>6</sup> Enter the fuel heating value in Btu/standard cubic foot.

# Attachment G

## Emission Source Data Sheets

### TANK TRUCK LOADING EMISSION UNIT DATA SHEET

*Furnish the following information for each new or modified bulk liquid transfer area or loading rack at the natural gas production pad.  
This form is to be used for bulk liquid transfer operations to tank trucks.*

1. Emission Unit ID: <b>S016</b>	2. Emission Point ID: <b>E017/E018</b>	3. Year Installed/ Modified: <b>2015</b>		
4. Emission Unit Description: <b>Tank Truck Loading Rack</b>				
5. Loading Area Data:				
5A. Number of pumps: <b>1</b>	5B. Number of liquids loaded: <b>1</b>	5C. Maximum number of tank trucks loading at one time: <b>1</b>		
6. Describe cleaning location, compounds and procedure for tank trucks: <b>NA</b>				
7. Are tank trucks pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If YES, describe: <b>NA</b>				
8. Projected Maximum Operating Schedule (for rack or transfer point as a whole):				
Maximum	Jan. - Mar.	Apr. - June	July - Sept.	Oct. - Dec.
hours/day	<b>As needed</b>	<b>As needed</b>	<b>As needed</b>	<b>As needed</b>
days/week	<b>As needed</b>	<b>As needed</b>	<b>As needed</b>	<b>As needed</b>

9. Bulk Liquid Data ( <i>add pages as necessary</i> ):	
Liquid Name	<b>Produced Fluids</b>
Max. daily throughput (1000 gal/day)	<b>21.01</b>
Max. annual throughput (1000 gal/yr)	<b>7,667</b>
Loading Method <sup>1</sup>	<b>SP</b>
Max. Fill Rate (gal/min)	<b>100</b>
Average Fill Time (min/loading)	<b>42 min</b>
Max. Bulk Liquid Temperature (°F)	<b>85 °F</b>
True Vapor Pressure <sup>2</sup>	<b>NA</b>
Cargo Vessel Condition <sup>3</sup>	<b>U</b>
Control Equipment or Method <sup>4</sup>	<b>Enclosed Combustion Device (C017 or C018)</b>
Minimum collection efficiency (%)	<b>70 %</b>
Minimum control efficiency (%)	<b>98 %</b>
<i>* Continued on next page</i>	

## Attachment G

### Emission Source Data Sheets

Maximum Emission Rate	Loading (lb/hr)	<b>0.04</b>
	Annual (ton/yr)	<b>0.17</b>
Estimation Method <sup>5</sup>		<b>EPA AP-42, ProMax</b>
Notes:		
<sup>1</sup> BF = Bottom Fill    SP = Splash Fill    SUB = Submerged Fill		
<sup>2</sup> At maximum bulk liquid temperature		
<sup>3</sup> B = Ballasted Vessel, C = Cleaned, U = Uncleaned (dedicated service), O = other (describe)		
<sup>4</sup> List as many as apply (complete and submit appropriate <i>Air Pollution Control Device Sheets as Attachment "H"</i> ): CA = Carbon Adsorption VB = Dedicated Vapor Balance (closed system) ECD = Enclosed Combustion Device F = Flare TO = Thermal Oxidation or Incineration		
<sup>5</sup> EPA = EPA Emission Factor as stated in AP-42 MB = Material Balance TM = Test Measurement based upon test data submittal O = other (describe)		

<b>10. Proposed Monitoring, Recordkeeping, Reporting, and Testing</b> Please propose monitoring, recordkeeping, and reporting in order to demonstrate compliance with the proposed operating parameters. Please propose testing in order to demonstrate compliance with the proposed emissions limits.	
MONITORING <i>Please list and describe the process parameters and ranges that are proposed to be monitored in order to demonstrate compliance with the operation of this process equipment operation/air pollution control device.</i>  <b>EQT will comply with all monitoring requirements set forth in the permit that is issued.</b>	RECORDKEEPING <i>Please describe the proposed recordkeeping that will accompany the monitoring.</i>  <b>EQT will comply with all recordkeeping requirements set forth in the permit that is issued.</b>
REPORTING <i>Please describe the proposed frequency of reporting of the recordkeeping.</i>  <b>EQT will comply with all reporting requirements set forth in the permit that is issued.</b>	TESTING <i>Please describe any proposed emissions testing for this process equipment/air pollution control device.</i>  <b>EQT will comply with all testing requirements set forth in the permit that is issued.</b>
11. Describe all operating ranges and maintenance procedures required by Manufacturer to maintain warranty: <b>NA</b>	

# Attachment G

## Emission Source Data Sheets

### LEAK SOURCE DATA SHEET

Source Category	Pollutant	Number of Source Components <sup>1</sup>	Number of Components Monitored by Frequency <sup>2</sup>	Average Time to Repair (days) <sup>3</sup>	Estimated Annual Emission Rate (lb/yr) <sup>4</sup>
Pumps <sup>5</sup>	light liquid VOC <sup>6,7</sup>	--	--	--	--
	heavy liquid VOC <sup>8</sup>	--	--	--	--
	Non-VOC <sup>9</sup>	--	--	--	--
Valves <sup>10</sup>	Gas VOC	<b>257</b>	<b>N/A</b>	<b>N/A</b>	<b>650.14</b>
	Light Liquid VOC	--	--	--	--
	Heavy Liquid VOC	--	--	--	--
	Non-VOC	--	--	--	--
Safety Relief Valves <sup>11</sup>	Gas VOC	<b>7</b>	<b>N/A</b>	<b>N/A</b>	<b>26.23</b>
	Non VOC	--	--	--	--
Open-ended Lines <sup>12</sup>	VOC	<b>18</b>	<b>N/A</b>	<b>N/A</b>	<b>100.02</b>
	Non-VOC	--	--	--	--
Sampling Connections <sup>13</sup>	VOC	--	--	--	--
	Non-VOC	--	--	--	--
Compressors	VOC	--	--	--	--
	Non-VOC	--	--	--	--
Flanges	VOC	<b>1123</b>	<b>N/A</b>	<b>N/A</b>	<b>315.65</b>
	Non-VOC	--	--	--	--
Other	VOC	--	--	--	--
	Non-VOC	--	--	--	--

<sup>1 - 13</sup> See notes on the following page.

# Attachment G

## Emission Source Data Sheets

### Notes for Leak Source Data Sheet

1. For VOC sources include components on streams and equipment that contain greater than 10% w/w VOC, including feed streams, reaction/separation facilities, and product/by-product delivery lines. Do not include certain leakless equipment as defined below by category.

2. By monitoring frequency, give the number of sources routinely monitored for leaks, using a portable detection device that measures concentration in ppm. Do not include monitoring by visual or soap-bubble leak detection methods. "M/Q(M)/Q/SA/A/O" means the time period between inspections as follows:

Monthly/Quarterly, with Monthly follow-up of repaired leakers/Quarterly/Semi-annual/Annually/Other (specify time period)

If source category is not monitored, a single zero in the space will suffice. For example, if 50 gas-service valves are monitored quarterly, with monthly follow-up of those repaired, 75 are monitored semi-annually, and 50 are checked bimonthly (alternate months), with non checked at any other frequency, you would put in the category "valves, gas service:" 0/50/0/75/0/50 (bimonthly).

3. Give the average number of days, after a leak is discovered, that an attempt will be made to repair the leak.
4. Note the method used: MB - material balance; EE - engineering estimate; EPA - emission factors established by EPA (cite document used); O - other method, such as in-house emission factor (specify).

#### EPA emission factor and component counts as specified in 40 CFR Part 98, subpart W

5. Do not include in the equipment count sealless pumps (canned motor or diaphragm) or those with enclosed venting to a control device. (Emissions from vented equipment should be included in the estimates given in the Emission Points Data Sheet.)
6. Volatile organic compounds (VOC) means the term as defined in 40 CFR ☐ 51.100 (s).
7. A light liquid is defined as a fluid with vapor pressure equal to or greater than 0.04 psi (0.3 Kpa) at 20°C. For mixtures, if 20% w/w or more of the stream is composed of fluids with vapor pressures greater than 0.04 psi (0.3 Kpa) at 20 °C, then the fluid is defined as a light liquid.
8. A heavy liquid is defined as a fluid with a vapor pressure less than 0.04 psi (0.3 Kpa) at 20°C. For mixtures, if less than 20% w/w of the stream is composed of fluids with vapor pressures greater than 0.04 psi (0.3 Kpa) at 20 °C, then the fluid is defined as a heavy liquid.
9. LIST CO, H<sub>2</sub>S, mineral acids, NO, NO<sub>2</sub>, SO<sub>3</sub>, etc. DO NOT LIST CO<sub>2</sub>, H<sub>2</sub>, H<sub>2</sub>O, N<sub>2</sub>, O<sub>2</sub>, and Noble Gases.
10. Include all process valves whether in-line or on an open-ended line such as sample, drain and purge valves. Do not include safety-relief valves, or leakless valves such as check, diaphragm, and bellows seal valves.
11. Do not include a safety-relief valve if there is a rupture disk in place upstream of the valve, or if the valve vents to a control device.
12. Open-ended lines include purge, drain and vent lines. Do not include sampling connections, or lines sealed by plugs, caps, blinds or second valves.
13. Do not include closed-purge sampling connections.



## Attachment G

### FUGITIVE EMISSIONS FROM UNPAVED HAULROADS

*UNPAVED HAULROADS (including all equipment traffic involved in process, haul trucks, endloaders, etc.)*

		PM	PM-10
k =	Particle size multiplier	<b>4.9</b>	<b>1.5</b>
s =	Silt content of road surface material (%)	<b>4.8</b>	<b>4.8</b>
p =	Number of days per year with precipitation >0.01 in.	<b>150</b>	<b>150</b>

Item Number	Description	Number of Wheels	Mean Vehicle Weight (tons)	Mean Vehicle Speed (mph)	Miles per Trip	Maximum Trips per Hour	Maximum Trips per Year	Control Device ID Number	Control Efficiency (%)
1	<b>Liquids Hauling</b>	<b>14</b>	<b>30</b>	<b>10</b>	<b>1.72</b>	<b>1</b>	<b>1,826</b>	<b>NA</b>	<b>NA</b>
2	<b>Employee Vehicles</b>	<b>4</b>	<b>3</b>	<b>10</b>	<b>1.72</b>	<b>1</b>	<b>200</b>	<b>NA</b>	<b>NA</b>
3									
4									

**Source:** AP-42 Fifth Edition – 13.2.2 Unpaved Roads

$$E = k \times 5.9 \times (s \div 12) \times (S \div 30) \times (W \div 3)^{0.7} \times (w \div 4)^{0.5} \times ((365 - p) \div 365) = \text{lb/Vehicle Mile Traveled (VMT)}$$

Where:

		PM	PM-10
k =	Particle size multiplier	<b>4.9</b>	<b>1.5</b>
s =	Silt content of road surface material (%)	<b>4.8</b>	<b>4.8</b>
S =	Mean vehicle speed (mph)	<b>10</b>	<b>10</b>
W =	Mean vehicle weight (tons)	<b>30</b>	<b>3</b>
w =	Mean number of wheels per vehicle	<b>14</b>	<b>4</b>
p =	Number of days per year with precipitation >0.01 in.	<b>150</b>	<b>150</b>

For lb/hr:  $[\text{lb} \div \text{VMT}] \times [\text{VMT} \div \text{trip}] \times [\text{Trips} \div \text{Hour}] = \text{lb/hr}$

For TPY:  $[\text{lb} \div \text{VMT}] \times [\text{VMT} \div \text{trip}] \times [\text{Trips} \div \text{Hour}] \times [\text{Ton} \div 2000 \text{ lb}] = \text{Tons/year}$

#### SUMMARY OF UNPAVED HAULROAD EMISSIONS

Item No.	PM				PM-10			
	Uncontrolled		Controlled		Uncontrolled		Controlled	
	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY	lb/hr	TPY
1	<b>7.37</b>	<b>6.73</b>	<b>7.37</b>	<b>6.73</b>	<b>1.88</b>	<b>1.71</b>	<b>1.88</b>	<b>1.71</b>
2	<b>2.61</b>	<b>0.26</b>	<b>2.61</b>	<b>0.26</b>	<b>0.67</b>	<b>0.07</b>	<b>0.67</b>	<b>0.07</b>
3								
4	<b>Note: AP-42 has been updated since the last revision of this form. The most recently published factors were used in preparing these emission calculations. See Attachment I for detailed calculation methodologies.</b>							
5								
6								
7								
8								
<b>TOTALS:</b>	<b>9.98</b>	<b>6.99</b>	<b>9.98</b>	<b>6.99</b>	<b>2.54</b>	<b>1.78</b>	<b>2.54</b>	<b>1.78</b>

# **Attachment H**

# AIR POLLUTION CONTROL DEVICE

## Vapor Combustion Control Device Sheet

*Complete this vapor combustion control device sheet for each enclosed combustion device, flare, thermal oxidizer, or completion combustion device that is located at the natural gas production pad for the purpose of thermally destructing waste gas to control emissions of regulated pollutants to the atmosphere.*

<b>IMPORTANT: READ THE INSTRUCTIONS ACCOMPANYING THIS FORM BEFORE COMPLETING.</b>			
<b>General Information</b>			
1. Control Device ID#: <b>C017</b>		2. Installation Date: 2015 <span style="float: right;"><input checked="" type="checkbox"/> New</span>	
3. Maximum Rated Total Flow Capacity: <b>~7,800 scfh      188,000 scfd</b>	4. Maximum Design Heat Input: <b>11.66 MMBtu/hr</b>	5. Design Heat Content: <b>1,088 BTU/scf</b>	
<b>Control Device Information</b>			
6. Select the type of vapor combustion control device being used: <input checked="" type="checkbox"/> Enclosed Combustion Device  <input type="checkbox"/> Elevated Flare <input type="checkbox"/> Ground Flare <input type="checkbox"/> Thermal Oxidizer <input type="checkbox"/> Completion Combustion Device			
7. Manufacturer: <b>LEED Fabrication</b> Model No.: <b>Enclosed Combustor 48"</b>		8. Hours of operation per year: <b>8,760</b>	
9. List the emission units whose emissions are controlled by this vapor combustion control device: <b>Emission Units: S008-S015, S016, S021</b>			
10. Emission Unit ID#	Emission Source Description:	Emission Unit ID#	Emission Source Description:
<b>S008-S015</b>	<b>Produced Fluids Tanks</b>	<b>S016</b>	<b>Tank Truck Loading Rack</b>
<b>S021</b>	<b>Sand Trap Blowdown Tank</b>		
<i>If this vapor combustor controls emissions from more than six emission units, please attach additional pages.</i>			
11. Assist Type		12. Flare Height	13. Tip Diameter
<input type="checkbox"/> Steam - <input type="checkbox"/> Air - <input type="checkbox"/> Pressure - <input checked="" type="checkbox"/> Non -		~6 ft	14. Was the design per §60.18? <input type="checkbox"/> Yes <input type="checkbox"/> No NA
<b>Waste Gas Information</b>			
15. Maximum waste gas flow rate (scfm):	16. Heat value of waste gas stream (BTU/ft3)	17. Temperature of the emissions stream (°F)	18. Exit Velocity of the emissions stream (ft/s)
<b>450 lb/hr</b>	<b>Variable</b>	<b>70</b>	
19. Provide an attachment with the characteristics of the waste gas stream to be burned.			

Pilot Information				
20. Type/Grade of pilot fuel:	21. Number of pilot lights:	22. Fuel flow rate to pilot flame per pilot (scf/hr):	23. Heat input per pilot (BTU/hr):	24. Will automatic re-ignition be used?
Pipeline quality Natural Gas	1	~30	0.03 MMBtu/hr	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
25. If automatic re-ignition will be used, describe the method: N/A				
26. Describe the method of controlling flame:  <b>There are 3 flame cells to stop the main flame front and two (2) 2" flame arrestors on the piping from the drip pot to the burner assembly.</b>				
27. Is pilot flame equipped with a monitor to detect the presence of the flame?  <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		28. If yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infra-Red <input type="checkbox"/> Ultra Violet  <input type="checkbox"/> Camera with monitoring control room <input type="checkbox"/> Other, describe:		

29. Pollutant(s) Controlled	30. % Capture Efficiency	31. Manufacturer's Guaranteed Control Efficiency (%)
HC	100	>98
VOC	100	>98
HAP	100	>98
32. Has the control device been tested by the manufacturer and certified?  <b>Yes</b>		
33. Describe all operating ranges and maintenance procedures required by the manufacturer to maintain warranty:  <b>See Attached</b>		
34. Additional Information Attached? <input checked="" type="checkbox"/> <b>YES</b> <input type="checkbox"/> <b>NO</b>  <i>Please attach a copy of manufacturer's data sheet.</i> <i>Please attach a copy of manufacturer's drawing.</i> <i>Please attach a copy of the manufacturer's performance testing.</i>		

# AIR POLLUTION CONTROL DEVICE

## Vapor Combustion Control Device Sheet

*Complete this vapor combustion control device sheet for each enclosed combustion device, flare, thermal oxidizer, or completion combustion device that is located at the natural gas production pad for the purpose of thermally destructing waste gas to control emissions of regulated pollutants to the atmosphere.*

<b>IMPORTANT: READ THE INSTRUCTIONS ACCOMPANYING THIS FORM BEFORE COMPLETING.</b>			
<b>General Information</b>			
1. Control Device ID#: <b>C018</b>		2. Installation Date: 2014 <span style="float: right;"><input checked="" type="checkbox"/> New</span>	
3. Maximum Rated Total Flow Capacity: <b>~7,800 scfh      188,000 scfd</b>	4. Maximum Design Heat Input: <b>11.66 MMBtu/hr</b>	5. Design Heat Content: <b>1,088 BTU/scf</b>	
<b>Control Device Information</b>			
6. Select the type of vapor combustion control device being used: <input checked="" type="checkbox"/> Enclosed Combustion Device  <input type="checkbox"/> Elevated Flare <input type="checkbox"/> Ground Flare <input type="checkbox"/> Thermal Oxidizer <input type="checkbox"/> Completion Combustion Device			
7. Manufacturer: <b>LEED Fabrication</b> Model No.: <b>Enclosed Combustor 48"</b>		8. Hours of operation per year: <b>8,760</b>	
9. List the emission units whose emissions are controlled by this vapor combustion control device: <b>Emission Units: S008-S015, S016</b>			
10. Emission Unit ID#	Emission Source Description:	Emission Unit ID#	Emission Source Description:
<b>S008-S015</b>	<b>Produced Fluids Tanks</b>	<b>S016</b>	<b>Tank Truck Loading Rack</b>
<b>S021</b>	<b>Sandtrap Blowdown Tank</b>		
<i>If this vapor combustor controls emissions from more than six emission units, please attach additional pages.</i>			
11. Assist Type		12. Flare Height	13. Tip Diameter
<input type="checkbox"/> Steam - <input type="checkbox"/> Air - <input type="checkbox"/> Pressure - <input checked="" type="checkbox"/> Non -		~6 ft	14. Was the design per §60.18? <input type="checkbox"/> Yes <input type="checkbox"/> No NA
<b>Waste Gas Information</b>			
15. Maximum waste gas flow rate (scfm):	16. Heat value of waste gas stream (BTU/ft3)	17. Temperature of the emissions stream (°F)	18. Exit Velocity of the emissions stream (ft/s)
<b>450 lb/hr</b>	<b>Variable</b>	<b>70</b>	
19. Provide an attachment with the characteristics of the waste gas stream to be burned.			

Pilot Information				
20. Type/Grade of pilot fuel:	21. Number of pilot lights:	22. Fuel flow rate to pilot flame per pilot (scf/hr):	23. Heat input per pilot (BTU/hr):	24. Will automatic re-ignition be used?
<b>Pipeline quality Natural Gas</b>	<b>1</b>	<b>~30</b>	<b>0.03 MMBtu/hr</b>	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
25. If automatic re-ignition will be used, describe the method: <b>N/A</b>				
26. Describe the method of controlling flame:  <b>There are 3 flame cells to stop the main flame front and two (2) 2" flame arrestors on the piping from the drip pot to the burner assembly.</b>				
27. Is pilot flame equipped with a monitor to detect the presence of the flame?  <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		28. If yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infra-Red <input type="checkbox"/> Ultra Violet  <input type="checkbox"/> Camera with monitoring control room <input type="checkbox"/> Other, describe:		

29. Pollutant(s) Controlled	30. % Capture Efficiency	31. Manufacturer's Guaranteed Control Efficiency (%)
HC	100	>98
VOC	100	>98
HAP	100	>98
32. Has the control device been tested by the manufacturer and certified?  <b>Yes</b>		
33. Describe all operating ranges and maintenance procedures required by the manufacturer to maintain warranty:  <b>See Attached</b>		
34. Additional Information Attached? <input checked="" type="checkbox"/> <b>YES</b> <input type="checkbox"/> <b>NO</b>  <i>Please attach a copy of manufacturer's data sheet. Please attach a copy of manufacturer's drawing. Please attach a copy of the manufacturer's performance testing.</i>		



Enviromental Control Equipment  
Data Sheet

Item/Tag No.:		Page	1	of	2
Project No.:		Revision:	B		
		Date:	27 February 2014		
Project:		By:	JS		
P.O. No.:	-	Checked:	SG		
RFQ No.:	-	Approved:	MS		
Ref. P&ID:	-	Supplier:	LEED FABRICATION		
Remarks:	-	Model No.:	L30-0011-00		

GENERAL

1 Design Code:	NDE:	LEED Fabrication Standards
2 Service:	Customer Specs:	<input type="checkbox"/> Yes
3 Description:	Standard Dual Stage 48 High Efficiency Combustor	<input checked="" type="checkbox"/> No

PROCESS DATA

Gas Composition:		mol %	Process Conditions:		
			Variable	Value	Units
4 Methane			Flow Rate	Up to 140	Mscfd
5 Ethane			Pressure	Up to 12	oz/in2
6 Propane			Temperature		°F
7 I-Butane			Molecular Weight		
8 n-Butane			Process/Waste Stream	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Liquid	
9 I-Pentane			Detailed Process Description / Process Notes:		
10 n-Pentane			1. Turndown 10:1. Based on an expected normal operating rate indicated above.		
11 n-Hexane			2. DRE: 98 % operating at design conditions		
12 CO2			3. Burner Pressure Drop: Min. 0.10 oz/in2		
13 N2					
14 Helium					
15 H2O					
16 C7					
17 C8					
18 C9					
19 C10					
20 C11+					
TOTAL					
Other Components:		PPMV	Available Utilities:		
22 H2S			Fuel / Pilot Gas	Min. 30psig Natural Gas /Propane 40-50 SCFH	
23 Benzene			Instrument Air	NA	
24 Toluene			Power	120 V / 60 Hz or Solar Power	
25 E-Benzene			Steam	NA	
26 Xylene			Purge Gas		

DESIGN DATA

27 Ambient Temperatures:		Noise Performance Requirements:	Under 85 dBA
28 Low, °F	-20	Structural Design Code:	
29 High, °F	120	Wind Design Code:	ASCE
30 Design Conditions:	Pressure/Temperature		
31 Max. Relative Humidity, %	90	Pressure/Speed	100 mph
32 Elevation (ASL), ft		Category	
33 Area Classification:	Class I Div 2	Seismic Design Code:	
34 Electrical Design Code:	NEC	Location	

EQUIPMENT SPECIFICATION

35 Type:	<input type="checkbox"/> Elevated <input checked="" type="checkbox"/> Enclosed	Equipment Design:	
36	<input type="checkbox"/> Above Ground	Component	Material / Size / Rating / Other
37	<input checked="" type="checkbox"/> Stack <input type="checkbox"/> Multiple Stack	Burner	
38	<input type="checkbox"/> Portable / Trailer	Burner Tip / Assist Gas Burner	304 SS
39		Burner Body	Carbon Steel
40 Smokeless By:	<input type="checkbox"/> Steam <input type="checkbox"/> Assist Air	Pilot	
41	<input type="checkbox"/> Gas Assist <input checked="" type="checkbox"/> Staging	Pilot Tip	304 SS
42		Pilot Line(s)	Carbon Steel
43 Stack:	<input checked="" type="checkbox"/> Self Supporting	Firebox / Stack	
44 Flare Burner:	<input type="checkbox"/> Non-Smokeless <input checked="" type="checkbox"/> Smokeless <input type="checkbox"/> Gas Assist	Shell	Carbon Steel
45 Pilot:	<input checked="" type="checkbox"/> Intermittent <input type="checkbox"/> Continuous	Piping	Carbon Steel
46 Pilot Air Inspirator:	<input checked="" type="checkbox"/> Local <input type="checkbox"/> Remote	Nozzles	Carbon Steel
47 Pilot Flame Control:	<input type="checkbox"/> No <input checked="" type="checkbox"/> Yes (Thermocouple)	Flanges	Carbon Steel
48		Insulation	Blanket
49 Pilot Ignition:	<input type="checkbox"/> Flamefront Generator <input checked="" type="checkbox"/> Inspiring Ignitor	Insulation Pins	304 SS
50	<input type="checkbox"/> Electronic <input checked="" type="checkbox"/> Automatic <input type="checkbox"/> Manual	Refractory	NA
51	<input type="checkbox"/> With Pilot Flame Control	Refractory Anchors	NA
52	<input type="checkbox"/> With Auto Pilot Re-Ignition	Ladders and Platforms	NA
53		Stack Sample Connections	Per EPA requirements
54 Pilot Ignition Backup:	<input type="checkbox"/> Manual Specify: i.e Piezo-Electric	Sight Glass	2
55	<input type="checkbox"/> Battery Pack	Other	



Environmental Control Equipment  
Data Sheet

Item/Tag No.:		Page	2	of	3
Project No.:		Revision:	B		
Project:		Date:	27 February 2014		
P.O. No.:	-	By:	JS		
RFQ No.:	-	Checked:	SG		
Ref. P&ID:	-	Approved:	MS		
Supplier:	LEED FABRICATION				
Model No.:	L30-0011-00				

EQUIPMENT SPECIFICATION

Flame Detection:	<input type="checkbox"/> Thermocouple	<input checked="" type="checkbox"/> Ionization Rod	Auxiliary Equipment	
	<input type="checkbox"/> UV Scanner		Valves	NA
General Configuration:			Blowers	NA
Dampers			NA	
Inlet KO / Liquid Seal			NA	
Flame / Detonation Arrestor			Yes	
Instrumentation & Controls				
Solenoids / Shut-Off Valves			Check with Sales for available config.	
Flow Meters			NA	
Calorimeter			NA	
Pressure Switches/Transmitters			NA	
Thermocouples			Check with Sales for available config.	
Temperature Switches/Transmitters			NA	
BMS			Check with Sales for available config.	
CEMS			NA	
Other			NA	

FABRICATION AND INSPECTION

Special requirements	<input type="checkbox"/> Skid Mounted	<input checked="" type="checkbox"/> Concrete Pad	Equipment Info	
	<input type="checkbox"/> Other		Component	Weight / Dimensions
Inspection	<input checked="" type="checkbox"/> Vendor Standard		Burner	
	<input type="checkbox"/> Other. Specify:		Burner Assembly	
Material Certification	<input checked="" type="checkbox"/> Vendor Standard		Stack	
	<input type="checkbox"/> MTR		Stack Assembly	48" OD x 25' H
	<input type="checkbox"/> Certificate of Compliance		Pilot Tip	
	<input type="checkbox"/> Other (Specify):		Pilot Line(s)	
NDE	<input checked="" type="checkbox"/> Vendor Standard		Stack Assembly	
	<input type="checkbox"/> Radiography. Specify:		Auxiliary Equipment	
	<input type="checkbox"/> Ultrasonic. Specify:		Blowers	
	<input type="checkbox"/> Liquid Penetrant.		Inlet KO / Liquid Seal	
	<input type="checkbox"/> Magnetic Particles.		Flame / Detonation Arrestor	
	<input type="checkbox"/> PMI. Specify:		Skid	
	<input type="checkbox"/> Other. Specify:		Instrumentation & Controls	
Surface Preparation	<input checked="" type="checkbox"/> Vendor Standard		BMS	
	<input type="checkbox"/> Other. Specify:		Control Panel	
Paint System	<input checked="" type="checkbox"/> Vendor Standard			
	<input type="checkbox"/> Other. Specify:			
Finished Color	<input checked="" type="checkbox"/> Vendor Standard			
	<input type="checkbox"/> Other. Specify:			

Additional Notes:






Environmental Control Equipment  
Data Sheet

Item/Tag No.:		Page	3	of	3
Project No.:		Revision:	B		
		Date:	27 February 2014		
Project:		By:	JS		
P.O. No.:	-	Checked:	SG		
RFQ No.:	-	Approved:	MS		
Ref. P&ID:	-				
		Supplier:	LEED FABRICATION		
Remarks:	-	Model No.:	L30-0011-00		

Client:  
Site:  
Unit/Lease:

GENERAL ARRANGEMENT

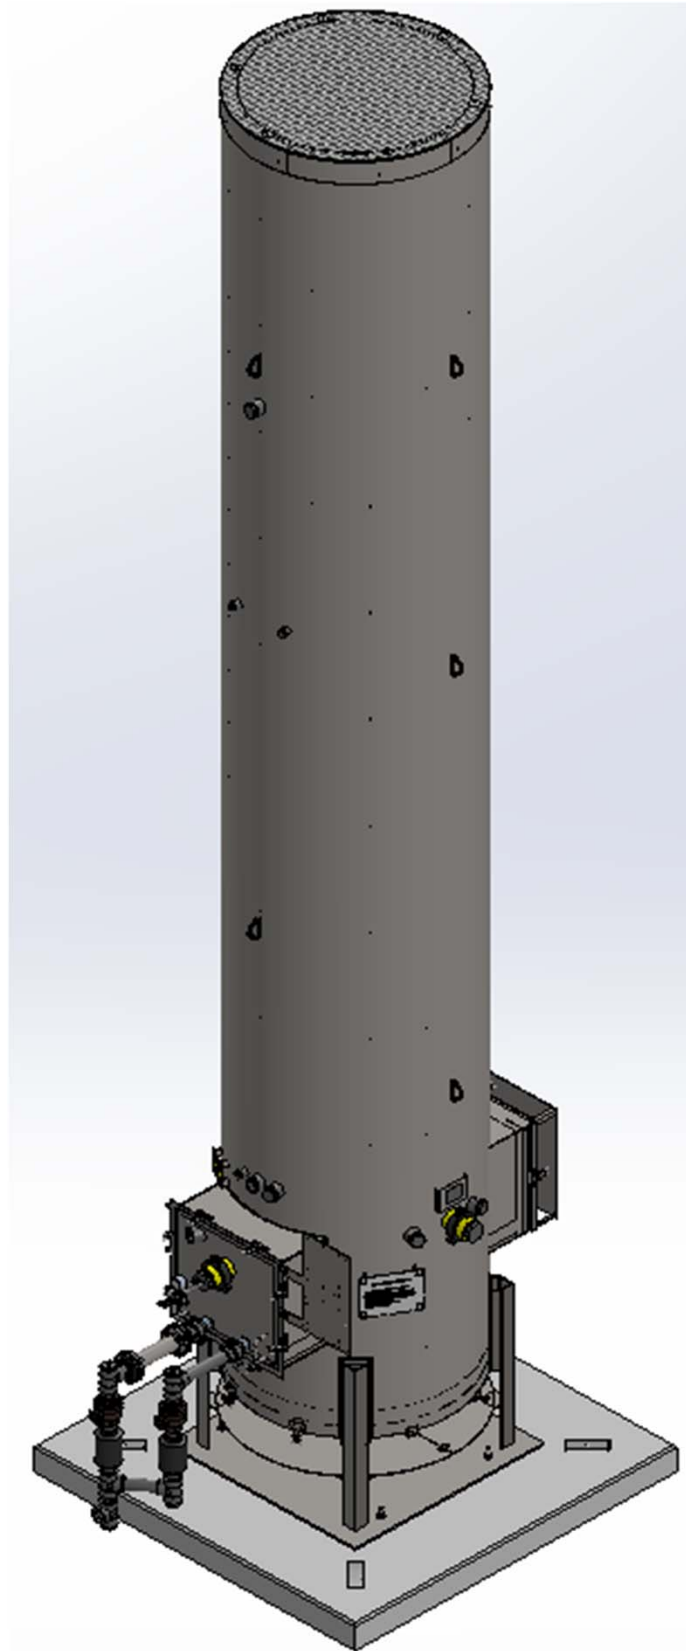

# **Attachment I**

Line Heaters S001 - S007

Pollutant	Emission Factor	Emission Factor Units	Emission Factor Basis / Source	Boiler Rating (MMBtu/hr)	Heat Value of Natural Gas (Btu/scf)	Annual Operating Hours	Max. Hourly Emissions. (lb/hr)	Max. Annual Emissions. (tpy)
VOC's	5.5	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	0.005	0.02
Hexane	1.8	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	0.002	0.007
Formaldehyde	0.075	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	<0.001	<0.001
Benzene	0.0021	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	<0.001	<0.001
Toluene	0.0034	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	<0.001	<0.001
Pb	0.0005	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	<0.001	<0.001
CO	84	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	0.08	0.34
NOx	100	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	0.09	0.40
PM	7.6	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	0.007	0.03
SO <sub>2</sub>	0.6	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	1.00	1,088	8,760	<0.001	0.002
CO <sub>2</sub>	53.06	kg CO <sub>2</sub> / MMBtu	40 CFR 98 Subpart C	1.00	1,088	8,760	116.98	512.36
CH <sub>4</sub>	0.001	kg CH <sub>4</sub> / MMBtu	40 CFR 98 Subpart C	1.00	1,088	8,760	0.002	0.01
N <sub>2</sub> O	0.0001	kg N <sub>2</sub> O / MMBtu	40 CFR 98 Subpart C	1.00	1,088	8,760	<0.001	<0.001
Total HAPs							0.002	0.008
Total CO <sub>2</sub> e							117.10	512.89

**Notes:**  
-Emission rates displayed above represent the max. hourly and max. annual emissions for one line heater. Cumulative emission rates for all 7 line heaters are diplayed in the Total Site Emissions Table.  
-Greenhouse Gas Emissions are calculated using 40 CFR 98 Subpart C Table C-1 and C-2 emission factors.  
-AP-42, Chapter 1.4 references are from the July 1998 revision.  
Max. Annual Emissions based upon Max. Hourly Emissions @ 8760 hr/yr.  
-CO<sub>2</sub> equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1 (Updated January 2014). GWP CO<sub>2</sub>=1, GWP CH<sub>4</sub>=25, GWP N<sub>2</sub>O=298

**Example Equations:**  
Max. Hourly Emission Rate **(lb/hr)** = Emission Factor **(lb/10<sup>6</sup> scf)** ÷ Heating Value of Natural Gas **(Btu/scf)** x Boiler Rating **(MMBtu/hr)**

Thermoelectric Generators S019 - S020

Pollutant	Emission Factor	Emission Factor Units	Emission Factor Basis / Source	Boiler Rating (MMBtu/hr)	Heat Value of Natural Gas (Btu/scf)	Annual Operating Hours	Max. Hourly Emissions. (lb/hr)	Max. Annual Emissions. (tpy)
VOC's	5.5	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	<0.001	<0.001
Hexane	1.8	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	<0.001	<0.001
Formaldehyde	0.075	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	<0.001	<0.001
Benzene	0.0021	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	<0.001	<0.001
Toluene	0.0034	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	<0.001	<0.001
Pb	0.0005	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	<0.001	<0.001
CO	84	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	0.001	0.004
NOx	100	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	0.001	0.005
PM	7.6	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	<0.001	<0.001
SO <sub>2</sub>	0.6	lb/10 <sup>6</sup> scf	AP-42 Chapter 1.4	0.013	1,088	8,760	<0.001	<0.001
CO <sub>2</sub>	53.06	kg CO <sub>2</sub> / MMBtu	40 CFR 98 Subpart C	0.013	1,088	8,760	1.52	6.66
CH <sub>4</sub>	0.001	kg CH <sub>4</sub> / MMBtu	40 CFR 98 Subpart C	0.013	1,088	8,760	<0.001	<0.001
N <sub>2</sub> O	0.0001	kg N <sub>2</sub> O / MMBtu	40 CFR 98 Subpart C	0.013	1,088	8,760	<0.001	<0.001
Total HAPs							<0.001	<0.001
Total CO <sub>2</sub> e							1.52	6.67

- Notes:**
- Emission rates displayed above represent the max. hourly and max. annual emissions for one TEG. Cumulative emission rates for both TEGs are displayed in the Total Site Emissions Table.
  - Greenhouse Gas Emissions are calculated using 40 CFR 98 Subpart C Table C-1 and C-2 emission factors.
  - AP-42, Chapter 1.4 references are from the July 1998 revision.
  - Max. Annual Emissions based upon Max. Hourly Emissions @ 8760 hr/yr.
  - CO<sub>2</sub> equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1 (Updated January 2014). GWP CO<sub>2</sub>=1, GWP CH<sub>4</sub>=25, GWP N<sub>2</sub>O=298

**Example Equations:**  
Max. Hourly Emission Rate (lb/hr) = Emission Factor (lb/10<sup>6</sup> scf) ÷ Heating Value of Natural Gas (Btu/scf) x Boiler Rating (MMBtu/hr)

Produced Fluids S008 - S015

Pollutant	Max. Hourly Emissions using ProMax (lb/hr)	Max. Yearly Emissions using ProMax (tons/yr)
VOCs	158.97	696.27
HAPs	7.65	33.52
CO <sub>2</sub>	0.80	3.50
CH <sub>4</sub>	32.76	143.49
Total CO <sub>2</sub> e	819.80	3,590.71

- Notes:**
- Emission rates for Produced Fluid Tanks S008 - S015 were calculated using ProMax software. ProMax output sheets for the WEU-49 Pad are attached.
  - The emission rates displayed above are pre-control device emissions.
  - CO<sub>2</sub> equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1 (Updated January 2014). GWP CO<sub>2</sub>=1, GWP CH<sub>4</sub>=25, GWP N<sub>2</sub>O=298
  - CO<sub>2</sub> and CH<sub>4</sub> emissions solved for using emissions rates (lb/hr) of "4" from the ProMax output sheets.
  - For emission calculation purposes, the total throughput for tanks S008 - S015 is modeled as being received through a single tank. The throughput value represents the total throughput for all eight (8) 400-barrel tanks. Therefore, emission rates represent a total from all produced fluids tanks located on the well pad. Actual throughput for each tank will vary based on operations.

## Sand Trap Blowdown Tank S021

Pollutant	Max. Hourly Emissions using ProMax (lb/hr)	Max. Yearly Emissions using ProMax (tons/yr)
VOCs	6.62	28.98
HAPs	0.32	1.40
CO <sub>2</sub>	0.03	0.15
CH <sub>4</sub>	1.36	5.98
Total CO <sub>2</sub> e	34.15	149.56

**Notes:**

-Blowdown operations are conducted on the WEU-49 pad daily to allow for the removal of fluids from the sand traps. Based on available operational information, blowdowns are assumed to occur for one hour per day.

-Emissions from the Sand Trap Blowdown Tank are routed to an enclosed combustion device. The values displayed above are pre-control emission rates.

-Emission rates for the Sand Trap Blowdown Tank were calculated using ProMax software. ProMax output sheets for the WEU-49 Pad are attached.

-CO<sub>2</sub> equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1. GWP CO<sub>2</sub>=1, GWP CH<sub>4</sub>=25, GWP N<sub>2</sub>O=298

-CO<sub>2</sub> and CH<sub>4</sub> emissions solved for using emissions rates (lb/hr) of Stream "4" from the ProMax output sheets.

Tank Truck Loading Rack S016

Total Emissions from Tank Unloading Operations										
Pollutant	Max. Uncontrolled Hourly Emissions (lb/hr)	Max. Uncontrolled Annual Emissions (tons/yr)	Loading Rack Collection Efficiency	Enclosed Combustion Device Combusion Efficiency	Post-Control Max. Annual Emissions (lb/hr)	Post-Control Max. Annual Emissions (tons/yr)	Max. Hourly Emissions Not Collected by Loading Rack (lb/hr)	Max. Hourly Emissions Not Collected by Loading Rack (tons/yr)	Total Max. Hourly Emissions (lb/hr)	Total Max. Annual Emissions (tons/yr)
VOCs	0.12	0.54	70%	98%	0.002	0.008	0.04	0.16	0.04	0.17
HAPs	<0.001	0.002	70%	98%	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
CO <sub>2</sub>	0.001	0.005	70%	98%	0.43	1.87	<0.001	0.002	0.43	1.87
CH <sub>4</sub>	0.01	0.04	70%	98%	<0.001	<0.001	0.003	0.01	0.003	0.01
Total CO <sub>2</sub> e	0.25	1.09	--	--	0.43	1.89	0.075	0.33	0.51	2.22

-CO<sub>2</sub> and CH<sub>4</sub> emissions solved for using emissions rates (lb/hr) of load out fluids from ProMax summary sheets.

- Notes:**
- Emission rates for liquid unloading operations were calculated using ProMax software. ProMax summary sheets are attached
  - The emission rates displayed above a pre-control emission rates.

Gas Composition of Vent Gas

Gas Stream	Mole Fraction
Methane	0.32
Ethane	0.23
Propane	0.17
Butane	0.13
Pentanes	0.07
Carbon Dioxide	0.003

Vent Gas Properties

Mass Flowrate (lb/hr)	Density (lb/ft <sup>3</sup> )
0.24	0.10

Enclosed Combustion Device C017 - C018

Emissions from Tanks							Gas Composition of Vent Gas		
Input to Enclosed Combustion Device	Pollutant	Amount of Gas Sent to Enclosed Combustion Device (lbs/hr)	Amount of Gas Sent to Enclosed Combustion Device (tons/year)	Enclosed Combustion Device Combustion Efficiency	Max. Hourly Emissions (lb/hr)	Max. Yearly Emissions (tons/yr)	Gas Stream	Mole Fraction	
Produced Fluid Tanks S008 - S015	VOCs	79.48	348.14	98%	1.59	6.96	Methane	0.32	
	HAPs	3.83	16.76	98%	0.077	0.34	Ethane	0.23	
	CO <sub>2</sub>	0.40	1.75	98%	312.44	1,368.49	Propane	0.17	
	CH <sub>4</sub>	16.38	71.74	98%	0.33	1.43	Butane	0.13	
Sand Trap Blowdown Tank - S021	VOCs	3.31	14.49	98%	0.07	0.29	Pentanes	0.07	
	HAPs	0.16	0.70	98%	0.003	0.01	Carbon Dioxide	0.003	
	CO <sub>2</sub>	0.02	0.07	98%	12.65	55.43	Vent Gas Properties		
	CH <sub>4</sub>	0.68	2.99	98%	0.01	0.06	Vent Gas Properties	Mass Flow Rate (lb/hr)	Density (lb/ft <sup>3</sup> )
Tank Truck Loading Rack - S016	VOCs	0.06	0.27	98%	0.02	0.09			
	HAPs	<0.001	0.001	98%	<0.001	<0.001	Produced Fluids Tank	119.96	0.09
	CO <sub>2</sub>	<0.001	0.003	98%	0.21	0.94	Blowdown Tank	5.00	0.10
	CH <sub>4</sub>	0.005	0.02	98%	0.002	0.01			
Totals	VOCs	82.85	362.90	--	1.68	7.34			
	HAPs	3.99	17.46	--	0.08	0.35			
	CO <sub>2</sub>	0.42	1.82	--	325.31	1,424.85			
	CH <sub>4</sub>	17.07	74.75	--	0.34	1.50			
	CO2e	427.10	1,870.68	--	333.88	1,462.39			

Emissions from Pilot Operations											
Pollutant	Emission Factor (lb/10 <sup>6</sup> scf)	Emission Factors (kg XX/MMBtu)	Heat Value of Natural Gas (Btu/scf)	Enclosed Combustion Device Pilot Rating (Btu/hr)	Enclosed Combustion Device Burner Rating (Btu/hr)	Pilot Max. Hourly Emissions (lb/yr)	Pilot Max. Hourly Emissions (tons/yr)	Burner Max. Hourly Emissions (lb/hr)	Burner Max. Hourly Emissions (tons/hr)	Max. Hourly Emissions (lb/hr)	Max. Yearly Emissions (tons/yr)
VOCs	5.5	--	1,088	30,000	11,660,000	<0.001	<0.001	--	--	<0.001	<0.001
Hexane	1.8	--	1,088	30,000	11,660,000	<0.001	<0.001	--	--	<0.001	<0.001
Formaldehyde	0.075	--	1,088	30,000	11,660,000	<0.001	<0.001	<0.001	0.004	<0.001	<0.001
CO	84	--	1,088	30,000	11,660,000	0.002	0.01	0.90	3.94	0.90	3.95
NO <sub>x</sub>	100	--	1,088	30,000	11,660,000	0.003	0.01	1.07	4.69	1.07	4.71
PM	7.6	--	1,088	30,000	11,660,000	<0.001	<0.001	0.08	0.36	0.08	0.36
SO <sub>2</sub>	0.6	--	1,088	30,000	11,660,000	<0.001	<0.001	0.006	0.03	0.006	0.03
CO <sub>2</sub>	--	53.06	1,088	30,000	11,660,000	3.51	15.37	1,363.95	5,974.12	1,367.46	5,989.49
CH <sub>4</sub>	--	0.001	1,088	30,000	11,660,000	<0.001	<0.001	0.03	0.11	0.03	0.11
N <sub>2</sub> O	--	<0.001	1,088	30,000	11,660,000	<0.001	<0.001	0.00	0.01	0.00	0.01
Total HAPs						<0.001	<0.001	--	--	<0.001	<0.001
CO <sub>2</sub> e						3.51	15.39	1,365.36	5,980.29	1,368.88	5,995.67



Total Enclosed Combustion Device Emissions		
Pollutant	Max. Hourly Emissions (lb/hr)	Max. Yearly Emissions (tons/yr)
VOCs	1.68	7.34
HAPs	0.08	0.35
CO	0.90	3.95
NOx	1.07	4.71
PM	0.08	0.36
SO <sub>2</sub>	0.01	0.03
CO <sub>2</sub>	1,692.77	7,414.34
CH <sub>4</sub>	0.37	1.61
N <sub>2</sub> O	0.003	0.01
CO <sub>2</sub> e	1,702.75	7,458.06

Notes:

- Emissions from Enclosed Combustion Device Operations from AP-42, Chapter 1.4 references are from the July 1998 revision.
- Greenhouse Gas Emissions from the Enclosed Combustion Device Pilot and Burner calculated using 40 CFR 98 Subpart C Table C-1 and C-2 emission factors.
- Max. Annual Emissions based upon Max. Hourly Emissions @ 8760 hr/yr.
- CO<sub>2</sub> equivalency solved for using Global Warming Potentials found in 40CFR98 Table A-1 (Updated January 2014). GWP CO<sub>2</sub>=1, GWP CH<sub>4</sub>=25, GWP N<sub>2</sub>O=298

Example Calculations:

Emissions from Tanks VOCs (lb/hr) = Amount of Gas sent to Enclosed Combustion Device (lb/hr) x 0.02 = Max. Hourly Emissions (lb/hr)

Emissions from Enclosed Combustion Device Operations (lb/hr) = Emission factor (lb/106 Btu) x Heat Value of Natural Gas (Btu/scf) ÷ 1,000,000 x Enclosed Combustion Device Pilot Gas Usage (mcf/d) x 1,000 ÷ 24

Emissions from Enclosed Combustion Device Vapor Destruction CO2 Methodologies shown below sample equation

Emissions from Enclosed Combustion Device Operations CO2 (tons/yr) = ((Enclosed Combustion Device Pilot Gas Usage (mcf/d) x 1,000 x 365 x Fraction of Gas Combusted by Enclosed Combustion Device x Mole Fraction of Methane x Number of Carbon Atoms in Methane) + ... + (Enclosed Combustion Device Pilot Gas Usage (mcf/d) x 1,000 x 365 x Fraction of Gas Combusted by Enclosed Combustion Device x Mole Fraction of Pentanes-plus x Number of Carbon Atoms in Pentanes-plus)) x .0526 (kg/ft3) CO2 x .001 x 1.102 tons/tonnes

$$E_{a,CH_4}(un-combusted) = V_a * (1-\eta) * X_{CH_4}$$

(Eq. W-19)

$$E_{a,CO_2}(un-combusted) = V_a * X_{CO_2}$$

(Eq. W-20)

$$E_{a,CO_2}(combusted) = \sum_{j=1}^5 (\eta * V_a * Y_j * R_j)$$

(Eq. W-21)

- Where:
- Ea,CH4(un-combusted) = Contribution of annual un-combusted CH4 emissions from Enclosed Combustion Device stack in cubic feet, under actual conditions.
- Ea,CO2(un-combusted) = Contribution of annual un-combusted CO2 emissions from Enclosed Combustion Device stack in cubic feet, under actual conditions.
- Ea,CO2(combusted) = Contribution of annual combusted CO2 emissions from Enclosed Combustion Device stack in cubic feet, under actual conditions.
- Va = Volume of gas sent to Enclosed Combustion Device in cubic feet, during the year.
- η = Fraction of gas combusted by a burning Enclosed Combustion Device (default is 0.98). For gas sent to an unlit Enclosed Combustion Device, η is zero.
- XCH4 = Mole fraction of CH4 in gas to the Enclosed Combustion Device.
- XCO2 = Mole fraction of CO2 in gas to the Enclosed Combustion Device.
- Yj = Mole fraction of gas hydrocarbon constituents j (such as methane, ethane, propane, butane, and pentanes-plus).
- Rj = Number of carbon atoms in the gas hydrocarbon constituent j: 1 for methane, 2 for ethane, 3 for propane, 4 for butane, and 5 for pentanes plus).

Fugitive Emissions from Unpaved Haul Roads

Constant	Industrial Roads		
	PM	PM-10	PM-2.5
k (lb/VMT)	4.9	1.5	0.15
a	0.7	0.9	0.9
b	0.45	0.45	0.45

where

k		Particle size multiplier <sup>1</sup>
s	4.8	Silt content of road surface material (%)
p	150	Number of days per year with

Item Number	Description	Number of Wheels	W	Miles per Trip	Maximum Trips per Year	Control Efficiency (%)	PM Emissions (lbs/hr)	PM Emissions (tons/yr)	PM-10 Emissions (lbs/hr)	PM-10 Emissions (tons/yr)	PM-2.5 Emissions (lbs/hr)	PM-2.5 Emissions (tons/yr)
			Mean Vehicle Weight (tons)									
1	Liquids Hauling	14	30	1.72	1,826	NA	7.37	6.73	1.88	1.71	0.19	0.17
2	Employee Vehicles	4	3	1.72	200	NA	2.61	0.26	0.67	0.07	0.07	0.007
Totals:							9.98	6.99	2.54	1.78	0.25	0.18

Notes:

- <sup>1</sup> - Particle Size Multiplier used from AP-42 13.2.2 - Final Version 11/2006
- <sup>2</sup> - Silt Content of Road Surface uses Sand and Gravel Processing Plant Road from AP-42 13.2.2 - Final Version 11/2006
- <sup>3</sup> - Number of days per year with precipitation >0.01 in3 found using AP-42 13.2.2 Figure 13.2.2-1 - Final Version 11/2006

Example Calculations:

Emissions (lb/Vehicle Mile Traveled) -  $E = k \times (s/12)^a \times (W/3)^b$

Equation 1a from AP-42 13.2.2 - Final Version 11/2006

Size Specific Emissions (lb/VMT) -  $E_{ext} = E[(365-p)/365]$

Equation 2 from AP-42 13.2.2 - Final Version 11/2006

Fugitive Leaks

Default Average Component Counts for Major Onshore Natural Gas Production Equipment <sup>1</sup>				
Facility Equipment Type	Valves	Connectors	Open-ended Lines	Pressure Relief Valves
Wellheads	8	38	0.5	0
Separators	1	6	0	0
Meters/Piping	12	45	0	0
Compressors	12	57	0	0
In-line Heaters	14	65	2	1
Dehydrators	24	90	2	2

<sup>1</sup>- Table W-1B to 40CFR98 Subpart W

Well Specific Equipment Counts	
Facility Equipment Type	Count on Site
Wellheads	7
Separators	7
Meters/Piping	8
Compressors	0
In-line Heaters	7
Dehydrators	0

Gas Composition														
Emissions from Flaring Operations	Propane	Butane	Pentanes	Heptane	Octanes	Nonanes	Decanes	Hexane	Benzene	Toluene	Ethylbenzene	Xylene	CO <sub>2</sub>	CH <sub>4</sub>
Mole %	4.16	1.71	0.71	0.22	0.14	0.03	0.009	0.41	0.01	0.014	<0.001	0.007	0.19	78.57
MW	44	58	72	100	114	128	142	86.00	78.00	92.00	106.00	106.00	44.00	16.00

Fugitive Emissions													
Facility Equipment Type	Total Count	Emission Rate (scf/hr/component) <sup>2</sup>	Hours of Operation	VOCs (lbs/hr)	VOCs (tons/yr)	HAPs (lbs/hr)	HAPs (tons/yr)	CO <sub>2</sub> (lbs/hr)	CO <sub>2</sub> (tons/yr)	CH <sub>4</sub> (lbs/hr)	CH <sub>4</sub> (tons/yr)	Total CO <sub>2</sub> e (lbs/hr)	Total CO <sub>2</sub> e (tons/yr)
Valves	257	0.027	8760	0.07	0.33	0.007	0.03	0.001	0.007	0.23	0.99	5.66	24.78
Connectors	1123	0.003	8760	0.04	0.16	0.003	0.01	<0.001	0.003	0.11	0.48	2.75	12.03
Open-ended Lines	18	0.06	8760	0.01	0.05	0.001	0.005	<0.001	0.001	0.03	0.15	0.87	3.81
Pressure Relief Valves	7	0.04	8760	0.003	0.01	<0.001	0.00	<0.001	<0.001	0.01	0.04	0.23	1.00
Total Emissions:				0.12	0.55	0.01	0.05	0.003	0.01	0.38	1.66	9.50	41.63

<sup>2</sup>- Table W-1A to 40CFR98 Subpart W

Notes:

-Gas Composition data for WEU-49 site was unavailable. Gas composition was used to determine fugitive emissions based upon a nearby similar natural gas production site operated by EQT.

Example Equations:

Fugitive Emissions (lb/hr) = Count x Emission Rate x Hours of Operation ÷ 385.5 scf/lbmol x mol VOC's

Total WEU 49 Site Emission Levels

	VOCs		HAPs		CO		NO <sub>x</sub>		PM		SO <sub>2</sub>		CO <sub>2</sub>		CH <sub>4</sub>		N <sub>2</sub> O		CO <sub>2</sub> e	
Emission Sources	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr	lb/hr	tons/yr
Line Heater (S001)	0.005	0.02	0.002	0.008	0.08	0.34	0.09	0.40	0.007	0.03	<0.001	0.002	116.98	512.36	0.002	0.01	<0.001	<0.001	117.10	512.89
Line Heater (S002)	0.005	0.02	0.002	0.008	0.08	0.34	0.09	0.40	0.007	0.03	<0.001	0.002	116.98	512.36	0.002	0.01	<0.001	<0.001	117.10	512.89
Line Heater (S003)	0.005	0.02	0.002	0.008	0.08	0.34	0.09	0.40	0.007	0.03	<0.001	0.002	116.98	512.36	0.002	0.01	<0.001	<0.001	117.10	512.89
Line Heater (S004)	0.005	0.02	0.002	0.008	0.08	0.34	0.09	0.40	0.007	0.03	<0.001	0.002	116.98	512.36	0.002	0.01	<0.001	<0.001	117.10	512.89
Line Heater (S005)	0.005	0.02	0.002	0.008	0.08	0.34	0.09	0.40	0.007	0.03	<0.001	0.002	116.98	512.36	0.002	0.01	<0.001	<0.001	117.10	512.89
Line Heater (S006)	0.005	0.02	0.002	0.008	0.08	0.34	0.09	0.40	0.007	0.03	<0.001	0.002	116.98	512.36	0.002	0.01	<0.001	<0.001	117.10	512.89
Line Heater (S007)	0.005	0.02	0.002	0.008	0.08	0.34	0.09	0.40	0.007	0.03	<0.001	0.002	116.98	512.36	0.002	0.01	<0.001	<0.001	117.10	512.89
TEG (S019)	<0.001	<0.001	<0.001	<0.001	0.001	0.004	0.001	0.005	<0.001	<0.001	<0.001	<0.001	1.52	6.66	<0.001	<0.001	<0.001	<0.001	1.52	6.67
TEG (S020)	<0.001	<0.001	<0.001	<0.001	0.001	0.004	0.001	0.005	<0.001	<0.001	<0.001	<0.001	1.52	6.66	<0.001	<0.001	<0.001	<0.001	1.52	6.67
Enclosed Combustion Unit (C017)	1.68	7.34	0.08	0.35	0.90	3.95	1.07	4.71	0.08	0.36	0.006	0.03	1,692.77	7,414.34	0.37	1.61	0.003	0.01	1,702.75	7,458.06
Enclosed Combustion Unit (C018)	1.68	7.34	0.08	0.35	0.90	3.95	1.07	4.71	0.08	0.36	0.006	0.03	1,692.77	7,414.34	0.37	1.61	0.003	0.01	1,702.75	7,458.06
Haul Roads	--	--	--	--	--	--	--	--	9.98	6.99	--	--	--	--	--	--	--	--	--	--
Fugitives Leaks	0.12	0.55	0.01	0.05	--	--	--	--	--	--	--	--	0.003	0.01	0.38	1.66	--	--	9.50	41.63
Totals	3.51	15.38	0.18	0.80	2.35	10.28	2.79	12.24	10.20	7.92	0.02	0.07	4,207.43	18,428.53	1.13	4.96	0.01	0.03	4,237.74	18,561.32


-Two enclosed combustion devices are being included in this application. Emissions from the produced fluids tanks, sand trap blowdown tanks, and truck loading are routed to either C017 or C018. For the permitting of these sources, it is assumed that vapors are being evenly distributed between the two enclosed combustion devices. For this reason, the emissions from the combustion of vent gases between C017 and C018 are additive.

Flowsheet1

Plant Schematic

Client Name:	EQT	Job:
Location:	WEU 49 200% Contingency	
Flowsheet:	Flowsheet1	

EQT WEU 49 Well Pad  
200% Contingency

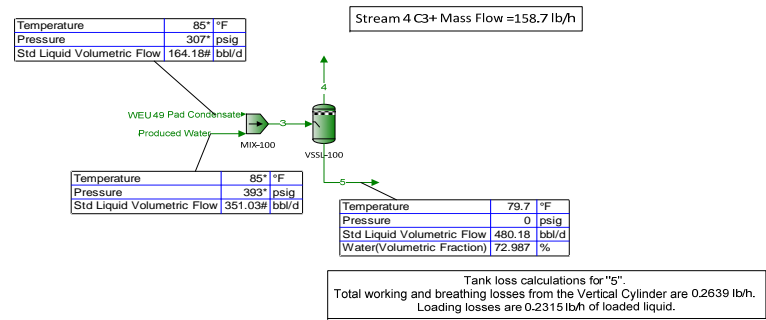

**Note**  
Working, Breathing and Loading losses include non-VOC components

## Process Streams Report

### All Streams

Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	WEU 49 200% Contingency	
Flowsheet:	Flowsheet1	

### Connections

	Produced Water	WEU 49 Pad Condensate	3	4	5
From Block	--	--	MIX-100	VSSL-100	VSSL-100
To Block	MIX-100	MIX-100	VSSL-100	--	--

### Stream Composition

Mole Fraction	Produced Water %	WEU 49 Pad Condensate %	3 %	4 %	5 %
Nitrogen	0 *	0 *	0	0	0
Methane	0 *	11.09 *	0.681192	31.7665	0.00738627
Carbon Dioxide	0 *	0.102 *	0.00626524	0.281957	0.00028934
Ethane	0 *	8.288 *	0.509082	22.623	0.029741
Propane	0 *	7.164 *	0.440041	17.0913	0.0791085
i-Butane	0 *	2.232 *	0.137098	4.20264	0.0489735
n-Butane	0 *	5.433 *	0.333716	8.92652	0.147459
i-Pentane	0 *	3.677 *	0.225856	3.56227	0.153536
n-Pentane	0 *	3.866 *	0.237465	3.0488	0.176526
Isohexane	0 *	4.668 *	0.286727	1.80815	0.253749
n-Hexane	0 *	4.11 *	0.252453	1.19369	0.23205
2,2,4-Trimethylpentane	0 *	0.031 *	0.00190414	0.00344008	0.00187085
Benzene	0 *	0.234 *	0.0143732	0.0659844	0.0132545
Heptane	0 *	12.522 *	0.769151	1.28232	0.758028
Toluene	0 *	0.939 *	0.0576771	0.0829814	0.0571286
Octane	0 *	14.608 *	0.897281	0.487976	0.906153
Ethylbenzene	0 *	0.127 *	0.00780084	0.00362186	0.00789143
o-Xylene	0 *	1.159 *	0.0711904	0.0249806	0.072192
Nonane	0 *	7.352 *	0.451589	0.0812802	0.459616
Decane	0 *	12.398 *	0.761534	0.0451695	0.777062
Water	100 *	0 *	93.8576	3.41746	95.818

Mass Fraction	Produced Water %	WEU 49 Pad Condensate %	3 %	4 %	5 %
Nitrogen	0 *	0 *	0	0	0
Methane	0 *	2.12587 *	0.495619	13.6495	0.00545606
Carbon Dioxide	0 *	0.0536389 *	0.0125052	0.332358	0.000586324
Ethane	0 *	2.97785 *	0.694247	18.2199	0.0411774
Propane	0 *	3.77472 *	0.880027	20.1858	0.160621
i-Butane	0 *	1.55013 *	0.361394	6.54246	0.131065
n-Butane	0 *	3.77324 *	0.879684	13.8963	0.394635
i-Pentane	0 *	3.16997 *	0.739039	6.88386	0.51006
n-Pentane	0 *	3.33291 *	0.777027	5.89162	0.586438
Isohexane	0 *	4.8067 *	1.12062	4.17343	1.00686
n-Hexane	0 *	4.23212 *	0.986665	2.75519	0.920764
2,2,4-Trimethylpentane	0 *	0.0423126 *	0.00986464	0.0105249	0.00984003
Benzene	0 *	0.218407 *	0.0509187	0.138049	0.0476719
Heptane	0 *	14.9928 *	3.49538	3.4415	3.49739
Toluene	0 *	1.03381 *	0.241019	0.204785	0.242369
Octane	0 *	19.9388 *	4.64847	1.49296	4.76606
Ethylbenzene	0 *	0.161108 *	0.0375604	0.0102989	0.0385763
o-Xylene	0 *	1.47027 *	0.342776	0.071033	0.352902
Nonane	0 *	11.2671 *	2.62679	0.279213	2.71427
Decane	0 *	21.0782 *	4.91412	0.172136	5.09082
Water	100 *	0 *	76.6863	1.649	79.4824

Mass Flow	Produced Water lb/h	WEU 49 Pad Condensate lb/h	3 lb/h	4 lb/h	5 lb/h
Nitrogen	0 *	0 *	0	0	0
Methane	0 *	33.1004 *	33.1004	32.7491	0.351298

\* User Specified Values

? Extrapolated or Approximate Values

ProMax 3.2.13330.0  
Copyright © 2002-2012 BRE Group, Ltd.

Licensed to The ERM Group, Inc. and Affiliates

## Process Streams Report

### All Streams

Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	WEU 49 200% Contingency	
Flowsheet:	Flowsheet1	

	Produced Water lb/h	WEU 49 Pad Condensate lb/h	3 lb/h	4 lb/h	5 lb/h
<b>Mass Flow</b>					
Carbon Dioxide	0 *	0.835174 *	0.835174	0.797422	0.0377515
Ethane	0 *	46.366 *	46.366	43.7147	2.65127
Propane	0 *	58.7735 *	58.7735	48.4316	10.3418
i-Butane	0 *	24.1361 *	24.1361	15.6972	8.43883
n-Butane	0 *	58.7506 *	58.7506	33.3413	25.4092
i-Pentane	0 *	49.3575 *	49.3575	16.5164	32.8411
n-Pentane	0 *	51.8945 *	51.8945	14.1357	37.7588
Isohexane	0 *	74.8418 *	74.8418	10.0133	64.8285
n-Hexane	0 *	65.8954 *	65.8954	6.61049	59.2849
2,2,4-Trimethylpentane	0 *	0.65882 *	0.65882	0.0252524	0.633567
Benzene	0 *	3.40066 *	3.40066	0.33122	3.06944
Heptane	0 *	233.443 *	233.443	8.25716	225.185
Toluene	0 *	16.0967 *	16.0967	0.491338	15.6054
Octane	0 *	310.453 *	310.453	3.58205	306.871
Ethylbenzene	0 *	2.50851 *	2.50851	0.02471	2.4838
o-Xylene	0 *	22.8926 *	22.8926	0.170429	22.7222
Nonane	0 *	175.433 *	175.433	0.669912	174.763
Decane	0 *	328.194 *	328.194	0.413003	327.781
Water	5121.57 *	0 *	5121.57	3.95643	5117.61

### Stream Properties

Property	Units	Produced Water	WEU 49 Pad Condensate	3	4	5
Temperature	°F	85 *	85 *	85.2654	79.6854	79.6854
Pressure	psia	407.696 *	321.696 *	321.696	14.6959 *	14.6959
Mole Fraction Vapor	%	0	4.04224	0.206281	100	0
Mole Fraction Light Liquid	%	100	95.9578	5.89426	0	4.18135
Mole Fraction Heavy Liquid	%	0	0	93.8995	0	95.8186
Molecular Weight	lb/lbmol	18.0153	83.6887	22.0492	37.3356	21.7179
Mass Density	lb/ft^3	62.1455	31.188	51.2532	0.0958949	57.1012
Molar Flow	lbmol/h	284.29	18.605	302.895	6.42626	296.469
Mass Flow	lb/h	5121.57	1557.03	6678.6	239.929	6438.67
Vapor Volumetric Flow	ft^3/h	82.4124	49.9241	130.306	2502	112.759
Liquid Volumetric Flow	gpm	10.2748	6.2243	16.2459	311.937	14.0582
Std Vapor Volumetric Flow	MMSCFD	2.58921	0.169448	2.75866	0.058528	2.70013
Std Liquid Volumetric Flow	sgpm	10.2384 *	4.7885 *	15.0269	1.02163	14.0052
Compressibility		0.0202195	0.147682	0.0236651	0.988522	0.000965673
Specific Gravity		0.996417			1.2891	0.915538
API Gravity		9.96415				22.2693
Enthalpy	Btu/h	-3.48913E+07	-1.50963E+06	-3.6401E+07	-291597	-3.61094E+07
Mass Enthalpy	Btu/lb	-6812.63	-969.559	-5450.39	-1215.35	-5608.2
Mass Cp	Btu/(lb*°F)	0.981529	0.522577	0.87516	0.423509	0.884264
Ideal Gas CpCv Ratio		1.32512	1.0633	1.25922	1.14462	1.26452
Dynamic Viscosity	cP	0.833816			0.00903325	0.765718
Kinematic Viscosity	cSt	0.837605			5.88068	0.821429
Thermal Conductivity	Btu/(h*ft*°F)	0.353848			0.0126736	0.275947
Surface Tension	lbf/ft	0.00492858				0.00399844 ?
Net Ideal Gas Heating Value	Btu/ft^3	0	4265.11	261.98	1932.24	225.775
Net Liquid Heating Value	Btu/lb	-1059.76	19184.8	3660	19489.1	3070.15
Gross Ideal Gas Heating Value	Btu/ft^3	50.31	4603.87	330.007	2106.31	291.504
Gross Liquid Heating Value	Btu/lb	0	20720.9	4830.81	21258.4	4218.65

#### Remarks

**Blocks**  
**MIX-100**  
Mixer/Splitter Report

Client Name:	EQT	Job:
Location:	WEU 49 200% Contingency	Modified: 2:14 PM, 7/24/2014
Flowsheet:	Flowsheet1	Status: Solved 11:53 AM, 2/18/2015

**Connections**

Stream	Connection Type	Other Block	Stream	Connection Type	Other Block
Produced Water	Inlet		WEU 49 Pad Condensate	Inlet	
3	Outlet	VSSL-100			

**Block Parameters**

Pressure Drop	0 psi	Fraction to PStream 3	100 %
---------------	-------	-----------------------	-------

**Remarks**



**Blocks**  
**VSSL-100**  
Separator Report

Client Name:	EQT	Job:
Location:	WEU 49 200% Contingency	Modified: 1:11 PM, 7/17/2014
Flowsheet:	Flowsheet1	Status: Solved 11:53 AM, 2/18/2015

**Connections**

Stream	Connection Type	Other Block	Stream	Connection Type	Other Block
3	Inlet	MIX-100	4	Vapor Outlet	
5	Light Liquid Outlet				

**Block Parameters**

Pressure Drop	307 psi	Main Liquid Phase	Light Liquid
Mole Fraction Vapor	2.12161 %	Heat Duty	0 Btu/h
Mole Fraction Light Liquid	4.09264 %	Heat Release Curve Type	Plug Flow
Mole Fraction Heavy Liquid	93.7857 %	Heat Release Curve Increments	5

**Remarks**

		<b>Flowsheet Environment Environment1</b>			
Client Name:	EQT			Job:	
Location:	WEU 49 200% Contingency				
Flowsheet:	Flowsheet1				
<b>Environment Settings</b>					
Number of Poynting Intervals		0		Freeze Out Temperature	10 °F
Gibbs Excess Model		77 °F		Threshold Difference	
Evaluation Temperature				Phase Tolerance	1 %
<b>Components</b>					
<b>Component Name</b>	<b>Henry's Law Component</b>	<b>Phase Initiator</b>	<b>Component Name</b>	<b>Henry's Law Component</b>	<b>Phase Initiator</b>
Nitrogen	False	False	2,2,4-Trimethylpentane	False	False
Methane	False	False	Benzene	False	False
Carbon Dioxide	False	False	Heptane	False	False
Ethane	False	False	Toluene	False	False
Propane	False	False	Octane	False	False
i-Butane	False	False	Ethylbenzene	False	False
n-Butane	False	False	o-Xylene	False	False
i-Pentane	False	False	Nonane	False	False
n-Pentane	False	False	Decane	False	False
Isohexane	False	False	Water	False	True
n-Hexane	False	False			
<b>Physical Property Method Sets</b>					
Liquid Molar Volume	COSTALD		Overall Package	Peng-Robinson	
Stability Calculation	Peng-Robinson		Vapor Package	Peng-Robinson	
Light Liquid Package	Peng-Robinson		Heavy Liquid Package	Peng-Robinson	
<b>Remarks</b>					

## Calculator Report

Client Name:	EQT	Job:
Location:	WEU 49 200% Contingency	

### Simple Solver 1

#### Source Code

Residual Error (for CV1) = TP / 175265 - 1

#### Calculated Variable [CV1]

SourceMoniker	ProMax:ProMax!Project!Flowsheets!Flowsheet1!PStreams!WEU 49 Pad Condensate!Phases!Total!Properties!Std Liquid Volumetric Flow
Value	164.177
Unit	bbl/d

#### Measured Variable [TP]

SourceMoniker	ProMax:ProMax!Project!Flowsheets!Flowsheet1!PStreams!5!Phases!Total!Properties!Std Liquid Volumetric Flow
Value	175266
Unit	bbl/yr

#### Solver Properties

Status: Solved

Error	3.71484E-06	Iterations	8
Calculated Value	4.7885 sgpm	Max Iterations	20
Lower Bound	sgpm	Weighting	1
Upper Bound	sgpm	Priority	0
Step Size	sgpm	Solver Active	Active
Is Minimizer	False	Group	
Algorithm	Default	Skip Dependency Check	False

#### Remarks

### Simple Solver 2

#### Source Code

Residual Error (for CV1) = LF / 73 - 1

#### Calculated Variable [CV1]

SourceMoniker	ProMax:ProMax!Project!Flowsheets!Flowsheet1!PStreams!Produced Water!Phases!Total!Properties!Std Liquid Volumetric Flow
Value	351.03
Unit	bbl/d

#### Measured Variable [LF]

SourceMoniker	ProMax:ProMax!Project!Flowsheets!Flowsheet1!PStreams!5!Phases!Total!Composition!Std. Liquid Volumetric Fraction!Water
Value	73.0474
Unit	%

#### Solver Properties

Status: Solved

Error	0.000649805	Iterations	8
Calculated Value	10.2384 sgpm	Max Iterations	20
Lower Bound	sgpm	Weighting	1
Upper Bound	sgpm	Priority	0
Step Size	sgpm	Solver Active	Active
Is Minimizer	False	Group	
Algorithm	Default	Skip Dependency Check	False

#### Remarks

## User Value Sets Report

Client Name:	EQT	Job:
Location:	WEU 49 200% Contingency	

### Cn+ Flow/Frac.

#### User Value [CnPlusSum]

* Parameter	158.711 lb/h	Upper Bound
Lower Bound	lb/h	* Enforce Bounds False

#### Remarks

This User Value Set was programmatically generated. GUID={E867C485-3D3C-49CB-BC24-EA16096DB2B1}

### Tank Losses

#### User Value [ShellLength]

* Parameter	20 ft	Upper Bound
* Lower Bound	0 ft	* Enforce Bounds False

#### User Value [ShellDiam]

* Parameter	12 ft	Upper Bound
* Lower Bound	0 ft	* Enforce Bounds False

#### User Value [BreatherVP]

* Parameter	0.03 psig	Upper Bound
Lower Bound		* Enforce Bounds False

#### User Value [BreatherVacP]

* Parameter	-0.03 psig	Upper Bound
Lower Bound		* Enforce Bounds False

#### User Value [DomeRadius]

Parameter	ft	Upper Bound	ft
Lower Bound	ft	* Enforce Bounds	False

#### User Value [OpPress]

* Parameter	0 psig	Upper Bound
Lower Bound		* Enforce Bounds False

#### User Value [AvgPercentLiq]

* Parameter	50 %	Upper Bound
Lower Bound	%	* Enforce Bounds False

#### User Value [MaxPercentLiq]

* Parameter	90 %	Upper Bound
Lower Bound	%	* Enforce Bounds False

#### User Value [AnnNetTP]

* Parameter	478.95 bbl/day	Upper Bound
* Lower Bound	0 bbl/day	* Enforce Bounds False

#### User Value [OREff]

* Parameter	0 %	Upper Bound
Lower Bound	%	* Enforce Bounds False

#### User Value [AtmPressure]

* Parameter	14.1085 psia	Upper Bound
Lower Bound		* Enforce Bounds False

## User Value Sets Report

Client Name:	EQT	Job:
Location:	WEU 49 200% Contingency	

### User Value [TVP]

* Parameter	0.596694 psia	Upper Bound
Lower Bound		* Enforce Bounds False

### User Value [AvgLiqSurfaceT]

* Parameter	57.7675 °F	Upper Bound
Lower Bound		* Enforce Bounds False

### User Value [MaxLiqSurfaceT]

* Parameter	66.3119 °F	Upper Bound
Lower Bound		* Enforce Bounds False

### User Value [TotalLosses]

* Parameter	0.263894 lb/h	Upper Bound
Lower Bound	lb/h	* Enforce Bounds False

### User Value [WorkingLosses]

* Parameter	0.150369 ton/yr	Upper Bound
Lower Bound	ton/yr	* Enforce Bounds False

### User Value [StandingLosses]

* Parameter	0.0422738 ton/yr	Upper Bound
Lower Bound	ton/yr	* Enforce Bounds False

### User Value [RimSealLosses]

* Parameter	0 ton/yr	Upper Bound
Lower Bound		* Enforce Bounds False

### User Value [WithdrawalLoss]

* Parameter	0 ton/yr	Upper Bound
Lower Bound		* Enforce Bounds False

### User Value [LoadingLosses]

* Parameter	0.231457 lb/h	Upper Bound
Lower Bound	lb/h	* Enforce Bounds False

### User Value [DeckFittingLosses]

* Parameter	0 ton/yr	Upper Bound
Lower Bound		* Enforce Bounds False

### User Value [DeckSeamLosses]

* Parameter	0 ton/yr	Upper Bound
Lower Bound		* Enforce Bounds False

### User Value [FlashingLosses]

* Parameter	0 ton/yr	Upper Bound
Lower Bound		* Enforce Bounds False

### User Value [GasMoleWeight]

* Parameter	0.0320317 kg/mol	Upper Bound
Lower Bound		* Enforce Bounds False

#### Remarks


This User Value Set was programmatically generated. GUID={B57AFC7E-AAE8-4873-921B-7B4031991004}

Flowsheet1

Plant Schematic

Client Name:	EQT	Job:
Location:	WEU 49 Blowdown Tank	
Flowsheet:	Flowsheet1	

EQT WEU 49 Well Pad  
Blowdown Tank

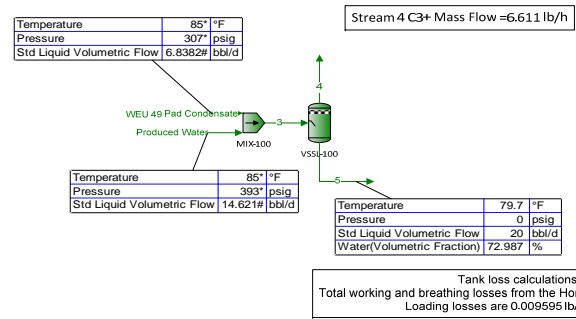

**Note**  
Working, Breathing and Loading losses include non-VOC components

## Process Streams Report

### All Streams

Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	WEU 49 Blowdown Tank	
Flowsheet:	Flowsheet1	

### Connections

	Produced Water	WEU 49 Pad Condensate	3	4	5
From Block	--	--	MIX-100	VSSL-100	VSSL-100
To Block	MIX-100	MIX-100	VSSL-100	--	--

### Stream Composition

Mole Fraction	Produced Water %	WEU 49 Pad Condensate %	3 %	4 %	5 %
Nitrogen	0 *	0 *	0	0	0
Methane	0 *	11.09 *	0.681199	31.7665	0.00738634
Carbon Dioxide	0 *	0.102 *	0.00626531	0.281957	0.000289342
Ethane	0 *	8.288 *	0.509087	22.623	0.0297413
Propane	0 *	7.164 *	0.440046	17.0913	0.0791094
i-Butane	0 *	2.232 *	0.1371	4.20264	0.048974
n-Butane	0 *	5.433 *	0.33372	8.92652	0.14746
i-Pentane	0 *	3.677 *	0.225858	3.56227	0.153537
n-Pentane	0 *	3.866 *	0.237467	3.0488	0.176528
Isohexane	0 *	4.668 *	0.28673	1.80814	0.253751
n-Hexane	0 *	4.11 *	0.252455	1.19369	0.232053
2,2,4-Trimethylpentane	0 *	0.031 *	0.00190416	0.00344008	0.00187087
Benzene	0 *	0.234 *	0.0143734	0.0659843	0.0132546
Heptane	0 *	12.522 *	0.769159	1.28232	0.758035
Toluene	0 *	0.939 *	0.0576777	0.0829813	0.0571292
Octane	0 *	14.608 *	0.89729	0.487975	0.906163
Ethylbenzene	0 *	0.127 *	0.00780092	0.00362186	0.00789151
o-Xylene	0 *	1.159 *	0.0711911	0.0249805	0.0721928
Nonane	0 *	7.352 *	0.451594	0.08128	0.459621
Decane	0 *	12.398 *	0.761542	0.0451694	0.77707
Water	100 *	0 *	93.8575	3.41746	95.8179

Mass Fraction	Produced Water %	WEU 49 Pad Condensate %	3 %	4 %	5 %
Nitrogen	0 *	0 *	0	0	0
Methane	0 *	2.12587 *	0.495623	13.6495	0.00545611
Carbon Dioxide	0 *	0.0536389 *	0.0125053	0.332358	0.000586327
Ethane	0 *	2.97785 *	0.694253	18.2199	0.0411777
Propane	0 *	3.77472 *	0.880034	20.1858	0.160622
i-Butane	0 *	1.55013 *	0.361397	6.54246	0.131066
n-Butane	0 *	3.77324 *	0.879691	13.8963	0.394639
i-Pentane	0 *	3.16997 *	0.739045	6.88386	0.510065
n-Pentane	0 *	3.33291 *	0.777033	5.89162	0.586443
Isohexane	0 *	4.8067 *	1.12063	4.17343	1.00687
n-Hexane	0 *	4.23212 *	0.986674	2.75519	0.920772
2,2,4-Trimethylpentane	0 *	0.0423126 *	0.00986472	0.0105249	0.00984012
Benzene	0 *	0.218407 *	0.0509192	0.138049	0.0476723
Heptane	0 *	14.9928 *	3.49541	3.4415	3.49742
Toluene	0 *	1.03381 *	0.241021	0.204785	0.242371
Octane	0 *	19.9388 *	4.64851	1.49296	4.7661
Ethylbenzene	0 *	0.161108 *	0.0375607	0.0102989	0.0385766
o-Xylene	0 *	1.47027 *	0.342778	0.0710329	0.352905
Nonane	0 *	11.2671 *	2.62681	0.279213	2.71429
Decane	0 *	21.0782 *	4.91416	0.172135	5.09087
Water	100 *	0 *	76.6861	1.649	79.4823

Mass Flow	Produced Water lb/h	WEU 49 Pad Condensate lb/h	3 lb/h	4 lb/h	5 lb/h
Nitrogen	0 *	0 *	0	0	0
Methane	0 *	1.37868 *	1.37868	1.36405	0.0146321

\* User Specified Values

? Extrapolated or Approximate Values

ProMax 3.2.13330.0  
Copyright © 2002-2012 BRE Group, Ltd.

Licensed to The ERM Group, Inc. and Affiliates

## Process Streams Report

### All Streams

Tabulated by Total Phase

Client Name:	EQT	Job:
Location:	WEU 49 Blowdown Tank	
Flowsheet:	Flowsheet1	

	Produced Water lb/h	WEU 49 Pad Condensate lb/h	3 lb/h	4 lb/h	5 lb/h
<b>Mass Flow</b>					
Carbon Dioxide	0 *	0.0347863 *	0.0347863	0.0332139	0.0015724
Ethane	0 *	1.93121 *	1.93121	1.82078	0.11043
Propane	0 *	2.448 *	2.448	2.01725	0.430754
i-Butane	0 *	1.0053 *	1.0053	0.653813	0.351491
n-Butane	0 *	2.44705 *	2.44705	1.38872	1.05833
i-Pentane	0 *	2.05581 *	2.05581	0.687931	1.36788
n-Pentane	0 *	2.16148 *	2.16148	0.588772	1.57271
Isohexane	0 *	3.11728 *	3.11728	0.417067	2.70021
n-Hexane	0 *	2.74464 *	2.74464	0.275337	2.46931
2,2,4-Trimethylpentane	0 *	0.0274408 *	0.0274408	0.0010518	0.026389
Benzene	0 *	0.141643 *	0.141643	0.0137958	0.127847
Heptane	0 *	9.72324 *	9.72324	0.343923	9.37932
Toluene	0 *	0.670452 *	0.670452	0.0204649	0.649987
Octane	0 *	12.9308 *	12.9308	0.149198	12.7816
Ethylbenzene	0 *	0.104483 *	0.104483	0.00102921	0.103454
o-Xylene	0 *	0.953512 *	0.953512	0.00709859	0.946413
Nonane	0 *	7.30704 *	7.30704	0.0279028	7.27913
Decane	0 *	13.6698 *	13.6698	0.0172021	13.6526
Water	213.319 *	0 *	213.319	0.164791	213.154

### Stream Properties

Property	Units	Produced Water	WEU 49 Pad Condensate	3	4	5
Temperature	°F	85 *	85 *	85.2654	79.6854	79.6854
Pressure	psia	407.696 *	321.696 *	321.696	14.6959 *	14.6959
Mole Fraction Vapor	%	0	4.04224	0.206284	100	0
Mole Fraction Light Liquid	%	100	95.9578	5.89431	0	4.1814
Mole Fraction Heavy Liquid	%	0	0	93.8994	0	95.8186
Molecular Weight	lb/lbmol	18.0153	83.6887	22.0492	37.3356	21.7179
Mass Density	lb/ft^3	62.1455	31.188	51.2531	0.0958949	57.1012
Molar Flow	lbmol/h	11.841	0.774928	12.6159	0.267664	12.3483
Mass Flow	lb/h	213.319	64.8527	278.172	9.99339	268.178
Vapor Volumetric Flow	ft^3/h	3.43257	2.07941	5.4274	104.212	4.69654
Liquid Volumetric Flow	gpm	0.427957	0.259252	0.676663	12.9927	0.585543
Std Vapor Volumetric Flow	MMSCFD	0.107843	0.00705775	0.114901	0.00243778	0.112463
Std Liquid Volumetric Flow	sgpm	0.42644 *	0.199448 *	0.625888	0.0425526	0.583335
Compressibility		0.0202195	0.147682	0.0236652	0.988522	0.000965675
Specific Gravity		0.996417			1.2891	0.915538
API Gravity		9.96415				22.2694
Enthalpy	Btu/h	-1.45326E+06	-62878.5	-1.51614E+06	-12145.5	-1.50399E+06
Mass Enthalpy	Btu/lb	-6812.63	-969.559	-5450.38	-1215.35	-5608.19
Mass Cp	Btu/(lb*°F)	0.981529	0.522577	0.875159	0.423509	0.884263
Ideal Gas CpCv Ratio		1.32512	1.0633	1.25922	1.14462	1.26452
Dynamic Viscosity	cP	0.833816			0.00903325	0.765717
Kinematic Viscosity	cSt	0.837605			5.88068	0.821429
Thermal Conductivity	Btu/(h*ft*°F)	0.353848			0.0126736	0.275946
Surface Tension	lbf/ft	0.00492858				0.00399843 ?
Net Ideal Gas Heating Value	Btu/ft^3	0	4265.11	261.983	1932.24	225.778
Net Liquid Heating Value	Btu/lb	-1059.76	19184.8	3660.04	19489.1	3070.18
Gross Ideal Gas Heating Value	Btu/ft^3	50.31	4603.87	330.01	2106.31	291.507
Gross Liquid Heating Value	Btu/lb	0	20720.9	4830.84	21258.4	4218.69

#### Remarks



**Blocks**  
**MIX-100**  
Mixer/Splitter Report

Client Name:	EQT	Job:
Location:	WEU 49 Blowdown Tank	Modified: 2:14 PM, 7/24/2014
Flowsheet:	Flowsheet1	Status: Solved 12:02 PM, 2/18/2015

**Connections**

Stream	Connection Type	Other Block	Stream	Connection Type	Other Block
Produced Water	Inlet		WEU 49 Pad Condensate	Inlet	
3	Outlet	VSSL-100			

**Block Parameters**

Pressure Drop	0 psi	Fraction to PStream 3	100 %
---------------	-------	-----------------------	-------

**Remarks**

**Blocks**  
**VSSL-100**  
Separator Report

Client Name:	EQT	Job:
Location:	WEU 49 Blowdown Tank	Modified: 1:11 PM, 7/17/2014
Flowsheet:	Flowsheet1	Status: Solved 12:02 PM, 2/18/2015

**Connections**

Stream	Connection Type	Other Block	Stream	Connection Type	Other Block
3	Inlet	MIX-100	4	Vapor Outlet	
5	Light Liquid Outlet				

**Block Parameters**

Pressure Drop	307 psi	Main Liquid Phase	Light Liquid
Mole Fraction Vapor	2.12163 %	Heat Duty	0 Btu/h
Mole Fraction Light Liquid	4.09268 %	Heat Release Curve Type	Plug Flow
Mole Fraction Heavy Liquid	93.7857 %	Heat Release Curve Increments	5

**Remarks**

		<b>Flowsheet Environment Environment1</b>			
Client Name:	EQT			Job:	
Location:	WEU 49 Blowdown Tank				
Flowsheet:	Flowsheet1				
<b>Environment Settings</b>					
Number of Poynting Intervals		0		Freeze Out Temperature	10 °F
Gibbs Excess Model		77 °F		Threshold Difference	
Evaluation Temperature				Phase Tolerance	1 %
<b>Components</b>					
<b>Component Name</b>	<b>Henry's Law Component</b>	<b>Phase Initiator</b>	<b>Component Name</b>	<b>Henry's Law Component</b>	<b>Phase Initiator</b>
Nitrogen	False	False	2,2,4-Trimethylpentane	False	False
Methane	False	False	Benzene	False	False
Carbon Dioxide	False	False	Heptane	False	False
Ethane	False	False	Toluene	False	False
Propane	False	False	Octane	False	False
i-Butane	False	False	Ethylbenzene	False	False
n-Butane	False	False	o-Xylene	False	False
i-Pentane	False	False	Nonane	False	False
n-Pentane	False	False	Decane	False	False
Isohexane	False	False	Water	False	True
n-Hexane	False	False			
<b>Physical Property Method Sets</b>					
Liquid Molar Volume	COSTALD		Overall Package	Peng-Robinson	
Stability Calculation	Peng-Robinson		Vapor Package	Peng-Robinson	
Light Liquid Package	Peng-Robinson		Heavy Liquid Package	Peng-Robinson	
<b>Remarks</b>					

## Calculator Report

Client Name:	EQT	Job:
Location:	WEU 49 Blowdown Tank	

### Simple Solver 1

#### Source Code

Residual Error (for CV1) = TP / 20 - 1

#### Calculated Variable [CV1]

SourceMoniker	ProMax:ProMax!Project!Flowsheets!Flowsheet1!PStreams!WEU 49 Pad Condensate!Phases!Total!Properties!Std Liquid Volumetric Flow
Value	6.83823
Unit	bbl/d

#### Measured Variable [TP]

SourceMoniker	ProMax:ProMax!Project!Flowsheets!Flowsheet1!PStreams!5!Phases!Total!Properties!Std Liquid Volumetric Flow
Value	20.0001
Unit	bbl/d

#### Solver Properties

Status: Solved

Error	3.66029E-06	Iterations	8
Calculated Value	0.199448 sgpm	Max Iterations	20
Lower Bound	sgpm	Weighting	1
Upper Bound	sgpm	Priority	0
Step Size	sgpm	Solver Active	Active
Is Minimizer	False	Group	
Algorithm	Default	Skip Dependency Check	False

#### Remarks

### Simple Solver 2

#### Source Code

Residual Error (for CV1) = LF / 73 - 1

#### Calculated Variable [CV1]

SourceMoniker	ProMax:ProMax!Project!Flowsheets!Flowsheet1!PStreams!Produced Water!Phases!Total!Properties!Std Liquid Volumetric Flow
Value	14.6208
Unit	bbl/d

#### Measured Variable [LF]

SourceMoniker	ProMax:ProMax!Project!Flowsheets!Flowsheet1!PStreams!5!Phases!Total!Composition!Std. Liquid Volumetric Fraction!Water
Value	73.0472
Unit	%

#### Solver Properties

Status: Solved

Error	0.000646915	Iterations	8
Calculated Value	0.42644 sgpm	Max Iterations	20
Lower Bound	sgpm	Weighting	1
Upper Bound	sgpm	Priority	0
Step Size	sgpm	Solver Active	Active
Is Minimizer	False	Group	
Algorithm	Default	Skip Dependency Check	False

#### Remarks

## User Value Sets Report

Client Name:	EQT	Job:
Location:	WEU 49 Blowdown Tank	

### Cn+ Flow/Frac.

#### User Value [CnPlusSum]

* Parameter	6.61055 lb/h	Upper Bound
Lower Bound	lb/h	* Enforce Bounds False

#### Remarks

This User Value Set was programmatically generated. GUID={E867C485-3D3C-49CB-BC24-EA16096DB2B1}

### Tank Losses

#### User Value [ShellLength]

* Parameter	10 ft	Upper Bound
* Lower Bound	0 ft	* Enforce Bounds False

#### User Value [ShellDiam]

* Parameter	10 ft	Upper Bound
* Lower Bound	0 ft	* Enforce Bounds False

#### User Value [BreatherVP]

* Parameter	0.03 psig	Upper Bound
Lower Bound		* Enforce Bounds False

#### User Value [BreatherVacP]

* Parameter	-0.03 psig	Upper Bound
Lower Bound		* Enforce Bounds False

#### User Value [DomeRadius]

Parameter	ft	Upper Bound	ft
Lower Bound	ft	* Enforce Bounds	False

#### User Value [OpPress]

* Parameter	0 psig	Upper Bound
Lower Bound		* Enforce Bounds False

#### User Value [AvgPercentLiq]

* Parameter	50 %	Upper Bound
Lower Bound	%	* Enforce Bounds False

#### User Value [MaxPercentLiq]

* Parameter	90 %	Upper Bound
Lower Bound	%	* Enforce Bounds False

#### User Value [AnnNetTP]

* Parameter	19.8551 bbl/day	Upper Bound
* Lower Bound	0 bbl/day	* Enforce Bounds False

#### User Value [OREff]

* Parameter	0 %	Upper Bound
Lower Bound	%	* Enforce Bounds False

#### User Value [AtmPressure]

* Parameter	14.1085 psia	Upper Bound
Lower Bound		* Enforce Bounds False

## User Value Sets Report

Client Name:	EQT	Job:
Location:	WEU 49 Blowdown Tank	

### User Value [TVP]

* Parameter	0.596697 psia	Upper Bound	
Lower Bound		* Enforce Bounds	False

### User Value [AvgLiqSurfaceT]

* Parameter	57.7675 °F	Upper Bound	
Lower Bound		* Enforce Bounds	False

### User Value [MaxLiqSurfaceT]

* Parameter	66.3119 °F	Upper Bound	
Lower Bound		* Enforce Bounds	False

### User Value [TotalLosses]

* Parameter	0.010877 lb/h	Upper Bound	
Lower Bound	lb/h	* Enforce Bounds	False

### User Value [WorkingLosses]

* Parameter	0.0476412 ton/yr	Upper Bound	
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [StandingLosses]

* Parameter	0 ton/yr	Upper Bound	
Lower Bound	ton/yr	* Enforce Bounds	False

### User Value [RimSealLosses]

* Parameter	0 ton/yr	Upper Bound	
Lower Bound		* Enforce Bounds	False

### User Value [WithdrawalLoss]

* Parameter	0 ton/yr	Upper Bound	
Lower Bound		* Enforce Bounds	False

### User Value [LoadingLosses]

* Parameter	0.00959524 lb/h	Upper Bound	
Lower Bound	lb/h	* Enforce Bounds	False

### User Value [DeckFittingLosses]

* Parameter	0 ton/yr	Upper Bound	
Lower Bound		* Enforce Bounds	False

### User Value [DeckSeamLosses]

* Parameter	0 ton/yr	Upper Bound	
Lower Bound		* Enforce Bounds	False

### User Value [FlashingLosses]

* Parameter	0 ton/yr	Upper Bound	
Lower Bound		* Enforce Bounds	False

### User Value [GasMoleWeight]

* Parameter	0.0320318 kg/mol	Upper Bound	
Lower Bound		* Enforce Bounds	False

#### Remarks

This User Value Set was programmatically generated. GUID={B57AFC7E-AAE8-4873-921B-7B4031991004}

**LAFAYETTE AREA LABORATORY**

4790 N.E. EVANGELINE THRUWAY  
CARENCRO, LA 70520  
PHONE (337) 896-3055  
FAX (337) 896-3077

**Certificate of Analysis : 13110138-001A**

**Company:** Gas Analytical Services      **For:** Gas Analytical Services  
**Well:** 512512      **Alan Ball**  
**Field:** EQT      **PO Box 1028**  
**Sample of:** Liquid-Spot  
**Conditions:** 307 psi @ N.G. ° F      **Bridgeport, WV, 26330**  
**Sampled by:** RM-GAS  
**Sample date:** 11/6/2013      **Report Date:** 11/25/2013  
**Remarks:** Cylinder No.: GAS  
**Remarks:**

<b>Analysis: ( GPA 2186M )</b>	<b>Mol. %</b>	<b>MW</b>	<b>Wt. %</b>	<b>Sp. Gravity</b>	<b>L.V. %</b>
Nitrogen	0.000	28.013	0.000	0.8094	0.000
Methane	11.090	16.043	2.078	0.3000	4.638
Carbon Dioxide	0.102	44.010	0.052	0.8180	0.043
Ethane	8.288	30.070	2.910	0.3562	5.466
Propane	7.164	44.097	3.689	0.5070	4.867
Iso-butane	2.232	58.123	1.515	0.5629	1.801
N-butane	5.433	58.123	3.687	0.5840	4.226
Iso-pentane	3.677	72.150	3.098	0.6244	3.320
N-pentane	3.866	72.150	3.257	0.6311	3.455
i-Hexanes	4.668	86.177	4.639	0.6795	4.680
n-Hexane	4.110	85.609	4.136	0.6640	4.145
2,2,4 trimethylpentane	0.031	114.231	0.042	0.6967	0.041
Benzene	0.234	78.114	0.141	0.8846	0.163
Heptanes	12.522	97.647	14.397	0.7040	13.659
Toluene	0.939	92.141	0.668	0.8719	0.779
Octanes	14.608	108.355	19.003	0.7412	16.985
E-benzene	0.127	106.167	0.073	0.8718	0.122
M-,O-,P-xylene	1.159	106.167	1.437	0.8731	1.112
Nonanes	7.352	123.434	10.940	0.7551	9.804
Decanes Plus	12.398	167.407	24.238	0.7840	20.694
	100.000		100.000		100.000

<b>Calculated Values</b>	<b>Total Sample</b>	<b>Decanes Plus</b>
Specific Gravity at 60 °F	0.6693	0.7840
Api Gravity at 60 °F	79.899	48.993
Molecular Weight	85.637	167.407
Pounds per Gallon (in Vacuum)	5.581	6.536
Pounds per Gallon (in Air)	5.575	6.529
Cu. Ft. Vapor per Gallon @ 14.73 psia	24.787	14.782

**Southern Petroleum Laboratories, Inc.**



Certificate of Analysis  
Number: 2030-13070164-001A

Carencro Laboratory  
4790 NE Evangeline Thruway  
Carencro, LA 70520

Alan Ball  
Gas Analytical Services  
PO Box 1028  
Bridgeport, WV 26330

July 17, 2013

Station Name: 512496  
Station Location: EQT Midstream  
Sample Point: Wellhead  
Cylinder No: GAS  
Analyzed: 07/16/2013 11:11:35 by CC

Sampled By: RM-GAS  
Sample Of: Gas Spot  
Sample Date: 07/08/2013 15:30  
Sample Conditions: 402 psig  
Method: GPA 2286

Analytical Data

Components	Mol. %	Wt. %	GPM at 14.73 psia	
Nitrogen	0.516	0.689		
Carbon Dioxide	0.188	0.395		
Methane	78.571	60.101		
Ethane	13.320	19.097	3.574	
Propane	4.159	8.744	1.150	
Iso-Butane	0.569	1.577	0.186	
n-Butane	1.137	3.151	0.360	
Iso-Pentane	0.353	1.214	0.129	
n-Pentane	0.352	1.211	0.128	
i-Hexanes	0.223	0.913	0.092	
n-Hexane	0.157	0.647	0.065	
Benzene	0.006	0.024	0.002	
Cyclohexane	0.027	0.108	0.009	
i-Heptanes	0.152	0.702	0.068	
n-Heptane	0.066	0.320	0.031	
Toluene	0.014	0.060	0.005	
i-Octanes	0.119	0.618	0.053	
n-Octane	0.021	0.113	0.011	
Ethylbenzene	0.001	0.004	NIL	
Xylenes	0.007	0.037	0.003	
i-Nonanes	0.028	0.161	0.013	
n-Nonane	0.005	0.028	0.003	
Decane Plus	0.009	0.086	0.005	
	100.000	100.000	5.887	

GPM TOTAL C2+ 5.887



## **Attachment J**

# **AIR QUALITY PERMIT NOTICE**

## **Notice of Application**

Notice is given that EQT Production Company has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a General Permit for the WEU-49 natural gas production operation located near West Union in Doddridge County, West Virginia. The latitude and longitude coordinates are: 39.25473 and -80.78660. Startup of operations is scheduled to begin on June 1, 2015.

The applicant estimates the maximum potential to discharge the following regulated air pollutants on a facility-wide basis will be:

Particulate Matter (PM) = 7.92 tpy  
Sulfur Dioxide (SO<sub>2</sub>) = 0.07 tpy  
Volatile Organic Compounds (VOC) = 15.38 tpy  
Carbon Monoxide (CO) = 10.28 tpy  
Nitrogen Oxides (NO<sub>x</sub>) = 12.24 tpy  
Hazardous Air Pollutants (HAPs) = 0.80 tpy  
Carbon Dioxide Equivalents (CO<sub>2</sub>e) = 18,561.32 tpy

Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57<sup>th</sup> Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1227, during normal business hours.

Dated this the 5<sup>th</sup> day of March, 2015.

By: EQT Production Company  
Kenneth Kirk  
Executive Vice President  
625 Liberty Avenue, Suite 1700  
Pittsburgh, PA 15222

## **Attachment L**

# **Attachment O**

**Attachment O**  
**G70-A EMISSION SUMMARY SHEET**

Emission Point ID No. (Must match Emission Units Table & Plot Plan)	Emission Point Type <sup>1</sup>	Emission Unit Vented Through This Point (Must match Emission Units Table & Plot Plan)		Air Pollution Control Device (Must match Emission Units Table & Plot Plan)		All Regulated Pollutants - Chemical Name/CAS <sup>3</sup>  (Speciate VOCs & HAPS)	Maximum Potential Uncontrolled Emissions <sup>4</sup>		Maximum Potential Controlled Emissions <sup>5</sup>		Emission Form or Phase  (At exit conditions, Solid, Liquid or Gas/Vapor)	Est. Method Used <sup>6</sup>
		ID No.	Source	ID No.	Device Type		lb/hr	ton/yr	lb/hr	ton/yr		
E001	Upward Vertical Stack	S001	NA	NA	NA	Total VOCs	0.005	0.02	0.005	0.02	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.09	0.40	0.09	0.40		
						CO	0.08	0.34	0.08	0.34		
						PM	0.007	0.03	0.007	0.03		
						SO <sub>2</sub>	<0.001	0.002	<0.001	0.002		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	0.002	0.008	0.002	0.008		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	0.002	0.007	0.002	0.007		
						CO <sub>2</sub>	116.98	512.36	116.98	512.36		
						CH <sub>4</sub>	0.002	0.01	0.002	0.01		
						N <sub>2</sub> O	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub> e	117.10	512.89	117.10	512.89		
E002	Upward Vertical Stack	S002	NA	NA	NA	Total VOCs	0.005	0.02	0.005	0.02	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.09	0.40	0.09	0.40		
						CO	0.08	0.34	0.08	0.34		
						PM	0.007	0.03	0.007	0.03		
						SO <sub>2</sub>	<0.001	0.002	<0.001	0.002		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	0.002	0.008	0.002	0.008		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	0.002	0.007	0.002	0.007		
						CO <sub>2</sub>	116.98	512.36	116.98	512.36		
						CH <sub>4</sub>	0.002	0.01	0.002	0.01		
						N <sub>2</sub> O	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub> e	117.10	512.89	117.10	512.89		

E003	Upward Vertical Stack	S003	NA	NA	NA	Total VOCs	0.005	0.02	0.005	0.02	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.09	0.40	0.09	0.40		
						CO	0.08	0.34	0.08	0.34		
						PM	0.007	0.03	0.007	0.03		
						SO <sub>2</sub>	<0.001	0.002	<0.001	0.002		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	0.002	0.008	0.002	0.008		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	0.002	0.007	0.002	0.007		
						CO <sub>2</sub>	116.98	512.36	116.98	512.36		
						CH <sub>4</sub>	0.002	0.01	0.002	0.01		
						N <sub>2</sub> O	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub> e	117.10	512.89	117.10	512.89		
E004	Upward Vertical Stack	S004	NA	NA	NA	Total VOCs	0.005	0.02	0.005	0.02	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.09	0.40	0.09	0.40		
						CO	0.08	0.34	0.08	0.34		
						PM	0.007	0.03	0.007	0.03		
						SO <sub>2</sub>	<0.001	0.002	<0.001	0.002		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	0.002	0.008	0.002	0.008		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	0.002	0.007	0.002	0.007		
						CO <sub>2</sub>	116.98	512.36	116.98	512.36		
						CH <sub>4</sub>	0.002	0.01	0.002	0.01		
						N <sub>2</sub> O	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub> e	117.10	512.89	117.10	512.89		
E005	Upward Vertical Stack	S005	NA	NA	NA	Total VOCs	0.005	0.02	0.005	0.02	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.09	0.40	0.09	0.40		
						CO	0.08	0.34	0.08	0.34		
						PM	0.007	0.03	0.007	0.03		
						SO <sub>2</sub>	<0.001	0.002	<0.001	0.002		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	0.002	0.008	0.002	0.008		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	0.002	0.007	0.002	0.007		
						CO <sub>2</sub>	116.98	512.36	116.98	512.36		
						CH <sub>4</sub>	0.002	0.01	0.002	0.01		
						N <sub>2</sub> O	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub> e	117.10	512.89	117.10	512.89		

E006	Upward Vertical Stack	S006	NA	NA	NA	Total VOCs	0.005	0.02	0.005	0.02	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.09	0.40	0.09	0.40		
						CO	0.08	0.34	0.08	0.34		
						PM	0.007	0.03	0.007	0.03		
						SO <sub>2</sub>	<0.001	0.002	<0.001	0.002		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	0.002	0.008	0.002	0.008		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	0.002	0.007	0.002	0.007		
						CO <sub>2</sub>	116.98	512.36	116.98	512.36		
						CH <sub>4</sub>	0.002	0.01	0.002	0.01		
E007	Upward Vertical Stack	S007	NA	NA	NA	Total VOCs	0.005	0.02	0.005	0.02	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.09	0.40	0.09	0.40		
						CO	0.08	0.34	0.08	0.34		
						PM	0.007	0.03	0.007	0.03		
						SO <sub>2</sub>	<0.001	0.002	<0.001	0.002		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	0.002	0.008	0.002	0.008		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	0.002	0.007	0.002	0.007		
						CO <sub>2</sub>	116.98	512.36	116.98	512.36		
						CH <sub>4</sub>	0.002	0.01	0.002	0.01		
E017	Upward Vertical Stack	S008 – S015, S016	Produced Fluid Tanks, Sand Trap Blowdown Tank, Tank Truck Loading Rack	C021	Enclosed Combustion Device	Total VOCs	82.85	362.90	1.68	7.34	Gas	ProMax, AP-42, 40 CFR 63 Subpart C
						Total HAPs	3.99	17.46	0.08	0.35		
						CO	<0.001	<0.001	0.90	3.95		
						NO <sub>x</sub>	<0.001	<0.001	1.07	4.71		
						PM	<0.001	<0.001	0.08	0.63		
						SO <sub>2</sub>	<0.001	<0.001	0.006	0.03		
						CO <sub>2</sub>	0.42	1.82	1,692.77	7,414.34		
						CH <sub>4</sub>	17.07	74.45	0.37	1.61		
						N <sub>2</sub> O	<0.001	<0.001	0.003	0.01		
						CO <sub>2</sub> e	427.10	1,870.68	1,702.75	7,458.06		
E018	Upward Vertical Stack	S008 – S015, S016	Produced Fluid Tanks, Sand Trap Blowdown Tank, Tank Truck Loading Rack	C022	Enclosed Combustion Device	Total VOCs	82.85	362.90	1.68	7.34	Gas	ProMax, AP-42, 40 CFR 63 Subpart C
						Total HAPs	3.99	17.46	0.08	0.35		
						CO	<0.001	<0.001	0.90	3.95		
						NO <sub>x</sub>	<0.001	<0.001	1.07	4.71		
						PM	<0.001	<0.001	0.08	0.63		
						SO <sub>2</sub>	<0.001	<0.001	0.006	0.03		
						CO <sub>2</sub>	0.42	1.82	1,692.77	7,414.34		
						CH <sub>4</sub>	17.07	74.45	0.37	1.61		
						N <sub>2</sub> O	<0.001	<0.001	0.003	0.01		
						CO <sub>2</sub> e	427.10	1,870.68	1,702.75	7,458.06		

E019	Upward Vertical Stack	S019	TEG	NA	NA	Total VOCs	<0.001	<0.001	<0.001	<0.001	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.001	0.005	0.001	0.005		
						CO	0.001	0.004	0.001	0.004		
						PM	<0.001	<0.001	<0.001	<0.001		
						SO <sub>2</sub>	<0.001	<0.001	<0.001	<0.001		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	<0.001	<0.001	<0.001	<0.001		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub>	1.52	6.66	1.52	6.66		
						CH <sub>4</sub>	<0.001	<0.001	<0.001	<0.001		
						N <sub>2</sub> O	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub> e	1.52	6.67	1.52	6.67		
E020	Upward Vertical Stack	S020	TEG	NA	NA	Total VOCs	<0.001	<0.001	<0.001	<0.001	Gas	AP-42, 40 CFR 63 Subpart C
						NO <sub>x</sub>	0.001	0.005	0.001	0.005		
						CO	0.001	0.004	0.001	0.004		
						PM	<0.001	<0.001	<0.001	<0.001		
						SO <sub>2</sub>	<0.001	<0.001	<0.001	<0.001		
						Pb	<0.001	<0.001	<0.001	<0.001		
						Total HAPs	<0.001	<0.001	<0.001	<0.001		
						Benzene	<0.001	<0.001	<0.001	<0.001		
						Toluene	<0.001	<0.001	<0.001	<0.001		
						Formaldehyde	<0.001	<0.001	<0.001	<0.001		
						Hexane	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub>	1.52	6.66	1.52	6.66		
						CH <sub>4</sub>	<0.001	<0.001	<0.001	<0.001		
						N <sub>2</sub> O	<0.001	<0.001	<0.001	<0.001		
						CO <sub>2</sub> e	1.52	6.67	1.52	6.67		

\*Two enclosed combustion devices are being included in this application. Emissions from the produced fluids tanks, sand trap blowdown tanks, and tank truck loading are routed to either C021 or C022. For the permitting of these sources, it is assumed that vapors are being evenly distributed between the two enclosed combustion devices. For this reason, the emissions from the combustion of vent gases between C021 and C022 are additive.

The EMISSION SUMMARY SHEET provides a summation of emissions by emission unit. Note that uncaptured process emission unit emissions are not typically considered to be fugitive and must be accounted for on the appropriate EMISSIONS UNIT DATA SHEET and on the EMISSIONS SUMMARY SHEET. Please note that total emissions from the source are equal to all vented emissions, all fugitive emissions, plus all other emissions (e.g. uncaptured emissions). Please complete the FUGITIVE EMISSIONS DATA SUMMARY SHEET for fugitive emission activities.

<sup>1</sup> Please add descriptors such as upward vertical stack, downward vertical stack, horizontal stack, relief vent, rain cap, etc.

<sup>2</sup> List all regulated air pollutants. Speciate VOCs, including all HAPs. Follow chemical name with Chemical Abstracts Service (CAS) number. **LIST** Acids, CO, CS<sub>2</sub>, VOCs, H<sub>2</sub>S, Inorganics, Lead, Organics, O<sub>3</sub>, NO, NO<sub>2</sub>, SO<sub>2</sub>, SO<sub>3</sub>, all applicable Greenhouse Gases (including CO<sub>2</sub> and methane), etc. **DO NOT LIST** H<sub>2</sub>, H<sub>2</sub>O, N<sub>2</sub>, O<sub>2</sub>, and Noble Gases

<sup>3</sup> Give maximum potential emission rate with no control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>4</sup> Give maximum potential emission rate with proposed control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>5</sup> Indicate method used to determine emission rate as follows: MB = material balance; ST = stack test (give date of test); EE = engineering estimate; M = modeling; O = other (specify).



## G70-A FUGITIVE EMISSIONS SUMMARY SHEET

FUGITIVE EMISSIONS SUMMARY	All Regulated Pollutants Chemical Name/CAS <sup>1</sup>	Maximum Potential Uncontrolled Emissions <sup>2</sup>		Maximum Potential Controlled Emissions <sup>3</sup>		Est. Method Used <sup>4</sup>
		lb/hr	ton/yr	lb/hr	ton/yr	
Haul Road/Road Dust Emissions Paved Haul Roads	NA	--	--	--	--	--
Unpaved Haul Roads	PM PM-10 PM-2.5	9.98 2.54 0.25	6.99 1.78 0.18	9.98 2.54 0.25	6.99 1.78 0.18	AP-42
Loading/Unloading Operations	Total VOC Total HAPs CO <sub>2</sub> CH <sub>4</sub> CO <sub>2</sub> e	0.12 <0.001 0.001 0.01 0.25	0.54 0.002 0.01 0.04 1.09	0.04 <0.001 0.43 0.003 0.51	0.17 <0.001 1.87 0.01 2.22	ProMax, AP-42
Equipment Leaks	Total VOC Total HAPs CO <sub>2</sub> CH <sub>4</sub> CO <sub>2</sub> e	0.12 0.01 0.003 0.38 9.50	0.55 0.05 0.01 1.66 41.63	0.12 0.01 0.003 0.38 9.50	0.55 0.05 0.01 1.66 41.63	40CFR98 Subpart W
Other	NA	NA	NA	NA	NA	NA

<sup>1</sup> List all regulated air pollutants. Speciate VOCs, including all HAPs. Follow chemical name with Chemical Abstracts Service (CAS) number. LIST Acids, CO, CS<sub>2</sub>, VOCs, H<sub>2</sub>S, Inorganics, Lead, Organics, O<sub>3</sub>, NO, NO<sub>2</sub>, SO<sub>2</sub>, SO<sub>3</sub>, all applicable Greenhouse Gases (including CO<sub>2</sub> and methane), etc. DO NOT LIST H<sub>2</sub>, H<sub>2</sub>O, N<sub>2</sub>, O<sub>2</sub>, and Noble Gases.

<sup>2</sup> Give rate with no control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>3</sup> Give rate with proposed control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>4</sup> Indicate method used to determine emission rate as follows: MB = material balance; ST = stack test (give date of test); EE = engineering estimate; M = modeling; O = other (specify).