



625 Liberty Ave, Suite 1700  
Pittsburgh PA 15222  
[www.eqt.com](http://www.eqt.com)

TEL: (412) 395-3699  
FAX: (412) 395-2156

Alex Bosiljevac  
Environmental Coordinator

May 12, 2015

**CERTIFIED MAIL # 7014 0150 0000 0208 7661**

Mr. William F. Durham, Director  
West Virginia Department of Environmental Protection  
Division of Air Quality  
601 57<sup>th</sup> Street, SE  
Charleston, West Virginia, 25304

**RE: General Permit Application  
EQT Production Company  
OXF-44 Natural Gas Production Site**

Dear Mr. Durham,

Enclosed are two electronic copies and one original hard copy of a G70-A General Air Permit Application for OXF-44 Natural Gas Production Well Site that is currently operating under permit number R13-3000. A legal advertisement will be published in the next few days and proof of publication will be forwarded as soon as it is received. Please contact me for payment of the application fee by credit card.

If you have any questions concerning this permit application, please contact me at (412) 395-3699 or by email at [abosiljevac@eqt.com](mailto:abosiljevac@eqt.com).

Sincerely,

A handwritten signature in blue ink, appearing to read 'RAB' followed by a large, stylized flourish.

Alex Bosiljevac  
EQT Corporation

Enclosures



## PROJECT REPORT

**EQT Production  
OXF-44 Pad**

### G70-A Permit Application



**Where energy meets innovation.**

TRINITY CONSULTANTS  
4500 Brooktree Drive  
Suite 103  
Wexford, PA 15090  
(724) 935-2611

May 2015



*Environmental solutions delivered uncommonly well*

## TABLE OF CONTENTS

---

<b>1. INTRODUCTION</b>	<b>4</b>
<b>1.1. FACILITY AND PROJECT DESCRIPTION</b>	<b>4</b>
<b>1.2. SOURCE STATUS</b>	<b>4</b>
<b>1.3. G70-A APPLICATION ORGANIZATION</b>	<b>5</b>
<b>2. SAMPLE EMISSION SOURCE CALCULATIONS</b>	<b>6</b>
<b>3. REGULATORY DISCUSSION</b>	<b>7</b>
<b>3.1. Prevention of Significant Deterioration (PSD) Source Classification</b>	<b>7</b>
<b>3.2. Title V Operating Permit Program</b>	<b>7</b>
<b>3.3. New Source Performance Standards</b>	<b>7</b>
3.3.1. NSPS Subparts D, Da, Db, and Dc	8
3.3.2. NSPS Subparts K, Ka, and Kb	8
3.3.3. NSPS Subpart OOOO—Crude Oil and Natural Gas Production, Transmission, and Distribution	8
3.3.4. Non-Applicability of All Other NSPS	9
<b>3.4. National Emission Standards for Hazardous Air Pollutants (NESHAP)</b>	<b>9</b>
3.4.1. 40 CFR 63 Subpart HH – Oil and Natural Gas Production Facilities	9
3.4.2. 40 CFR 63 Subpart JJJJJ – Industrial, Commercial, and Institutional Boilers	9
<b>3.5. West Virginia SIP Regulations</b>	<b>9</b>
3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers	10
3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor	10
3.5.3. 45 CSR 6: Control of Air Pollution from the Combustion of Refuse	10
3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources	10
3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter	10
3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks	10
3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants	11
3.5.8. Non-Applicability of Other SIP Rules	11
<b>4. G70-A APPLICATION FORMS</b>	<b>12</b>
<b>ATTACHMENT A: CURRENT BUSINESS CERTIFICATE</b>	
<b>ATTACHMENT B: PROCESS DESCRIPTION</b>	
<b>ATTACHMENT C: DESCRIPTION OF FUGITIVE EMISSIONS</b>	
<b>ATTACHMENT D: PROCESS FLOW DIAGRAM</b>	
<b>ATTACHMENT E: PLOT PLAN</b>	
<b>ATTACHMENT F: AREA MAP</b>	
<b>ATTACHMENT G: EMISSION UNIT DATA SHEETS AND G70-A SECTION APPLICABILITY FORM</b>	
<b>ATTACHMENT H: AIR POLLUTION CONTROL DEVICE DATA SHEET</b>	

ATTACHMENT I: EMISSION CALCULATIONS  
ATTACHMENT J: CLASS I LEGAL ADVERTISEMENT  
ATTACHMENT K: ELECTRONIC SUBMITTAL  
ATTACHMENT L: GENERAL PERMIT REGISTRATION APPLICATION FEE  
ATTACHMENT M: SITING CRITERIA WAIVER (*NOT APPLICABLE*)  
ATTACHMENT N: MATERIAL SAFETY DATA SHEET (*NOT APPLICABLE*)  
ATTACHMENT O: EMISSION SUMMARY SHEET

# 1. INTRODUCTION

---

EQT Production Company (EQT) is submitting this Class II General Permit (G70-A) application to the West Virginia Department of Environmental Protection (WVDEP) for the OXF-44 Wellpad, an existing natural gas production well pad, located in Doddridge County, West Virginia. The OXF-44 pad is currently operating under R13 permit number R13-3000. The proposed general permit application will consolidate all authorized and proposed equipment under a single permit.

## 1.1. FACILITY AND PROJECT DESCRIPTION

The OXF-44 pad is a natural gas production facility that currently consists of five (5) natural gas wells. Natural gas and liquids (including water and condensate) are extracted from deposits underneath the surface. Natural gas is transported from the well to a gas line for additional processing and compression, as necessary. The liquids produced are stored in storage vessels.

This application seeks to permit the following equipment at the OXF-44 pad:

- > Three (3) 400 barrel (bbl) storage tanks for condensate/water (produced fluids) controlled by one (1) existing combustor rated at 11.66 MMBtu/hr;
- > One (1) 140 bbl storage tank for sand and produced fluids from the sand separator (Vapors from this tank may be controlled by the aforementioned combustor);
- > Two (2) line heaters, each rated at 1.54 MMBtu/hr (heat input); and
- > One (1) thermoelectric generator (TEG) rated at 0.013 MMBtu/hr (heat input).

This application also seeks to remove five (5) 210-bbl storage tanks for produced fluids.

The OXF-44 pad consists of the following equipment:

- > Five (5) 400 barrel (bbl) storage tanks for condensate/water (produced fluids) controlled by the aforementioned combustor;
- > Four (4) line heaters, each rated at 1.54 MMBtu/hr (heat input);
- > One (1) TEG rated at 0.013 MMBtu/hr.

A process flow diagram is included as Attachment D.

## 1.2. SOURCE STATUS

WVDEP must make stationary source determinations on a case-by-case basis using the guidance under the Clean Air Act (CAA) and EPA's and WVDEP's implementing regulations. The definition of stationary source in 40 CFR 51.166(b) includes the following:

*"(6) Building, structure, facility, or installation means all of the pollutant emitting activities which belong to the same industrial grouping, are located on or more contiguous or adjacent properties, and are under control of the same person (or persons under common control)."*

Other additional pollutant emitting facilities should be aggregated with the proposed OXF-44 Pad for air permitting purposes if, and only if, all three elements of the "stationary source" definition above are fulfilled.

WVDEP determined that the OXF-44 pad is a separate stationary source when the current R-13 permit was issued. There are no Marcellus facilities within a quarter-mile radius of the OXF-44 Pad. The nearest wellpad, OXF-115, is located approximately 2,250 feet East of OXF-44. Therefore, the OXF-44 pad should continue to be considered a separate stationary source with respect to permitting programs, including Title V and Prevention of Significant

Deterioration (PSD). As discussed in this application, the facility is a minor source of air emissions with respect to New Source Review (NSR) and Title V permitting.

### 1.3. G70-A APPLICATION ORGANIZATION

This West Virginia Code of State Regulations, Title 45 (CSR) Series 13 (45 CSR 13) G70-A permit application is organized as follows:

- > Section 2: Sample Emission Source Calculations;
- > Section 3: Regulatory Discussion;
- > Section 4: G70-A Application Forms;
- > Attachment A: Current Business Certificate;
- > Attachment B: Process Description;
- > Attachment C: Description of Fugitive Emissions;
- > Attachment D: Process Flow Diagram;
- > Attachment E: Plot Plan;
- > Attachment F: Area Map;
- > Attachment G: Emission Unit Data Sheets and G70-A Section Applicability Form;
- > Attachment H: Air Pollution Control Device Sheets;
- > Attachment I: Emission Calculations;
- > Attachment J: Class I Legal Advertisement;
- > Attachment K: Electronic Submittal;
- > Attachment L: General Permit Registration Application Fee;
- > Attachment M: Siting Criteria Waiver (*not applicable*);
- > Attachment N: Material Safety Data Sheet (*not applicable*); and
- > Attachment O: Emissions Summary Sheet.

## 2. SAMPLE EMISSION SOURCE CALCULATIONS

---

The characteristics of air emissions from the existing natural gas production operations, along with the methodology for calculating emissions, are briefly described in this section of the application. Detailed emission calculations are presented in Attachment I of this application.

Emissions from this project will result from natural gas combustion in the line heaters and TEGs, as well as storage of organic liquids in storage tanks and loading of organic liquids into tank trucks. In addition, fugitive emissions will result from component leaks from the operation of the station. The methods by which emissions from each of these source types, as well as the existing source types, are calculated are summarized below.

- > **Line Heaters and TEGs:** Potential emissions of criteria pollutants and HAPs are calculated using U.S. EPA's AP-42 factors for natural gas external combustion.<sup>1</sup> These calculations assume a site-specific heat content of natural gas. Greenhouse gas emissions are calculated according to 40 CFR 98 Subpart C.<sup>2</sup> Please note that potential emissions of NO<sub>x</sub>, CO, PM, SO<sub>2</sub> and GHGs from the combustor are also calculated according to the aforementioned methodologies.
- > **Fugitive Equipment Leaks:** Emissions of VOC and HAPs from leaking equipment components have been estimated using facility estimated component counts and types along with *Table 2-4: Oil & Gas Production Operations Average Emission Factors, Protocol for Equipment Leak Emission Estimates, EPA 453/R-95-017, November 1995*. Emission factors used are based on average measured TOC from component types indicated in gas service at O&G Production Operations. Greenhouse gas emissions from component leaks are calculated according to the procedures in 40 CFR 98 Subpart W.<sup>3</sup>
- > **Storage Tanks:** Working, breathing and flashing emissions of VOC and HAPs from the condensate/water stored in the tanks at the facility are calculated using API E&P TANK v2.0.
- > **Tank Truck Loading:** Emissions of VOC and HAPs from the loading of organic liquids from storage tanks to tank truck are calculated using U.S. EPA's AP-42 Chapter 5 Section 2 factors.<sup>4</sup>
- > **Haul Roads:** Fugitive dust emitted from facility roadways has been estimated using projected vehicle miles traveled along with U.S. EPA's AP-42 factors for unpaved haul roads.<sup>5</sup>

---

<sup>1</sup> U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 1.4, Natural Gas Combustion, Supplement D, July 1998.

<sup>2</sup> 40 CFR 98 Subpart C, *General Stationary Fuel Combustion Sources*, Tables C-1 and C-2.

<sup>3</sup> 40 CFR 98 Subpart W, *Petroleum and Natural Gas Systems*, Section 98.233(r), *Population Count and Emission Factors*.

<sup>4</sup> U.S. EPA, AP 42, Fifth Edition, Volume I, Chapter 5.2, Transportation And Marketing Of Petroleum Liquids, June 2008.

<sup>5</sup> U.S. EPA, AP 42, Fifth Edition, Volume I, Section 13.2.2, Unpaved Roads, November 2006.

### 3. REGULATORY DISCUSSION

---

This section documents the applicability determinations made for Federal and State air quality regulations. In this section, applicability or non-applicability of the following regulatory programs is addressed:

- > Prevention of Significant Deterioration (PSD) permitting;
- > Title V of the 1990 Clean Air Act Amendments;
- > New Source Performance Standards (NSPS);
- > National Emission Standards for Hazardous Air Pollutants (NESHAP); and
- > West Virginia State Implementation Plan (SIP) regulations.

This review is presented to supplement and/or add clarification to the information provided in the WVDEP G70-A permit application forms.

In addition to providing a summary of applicable requirements, this section of the application also provides non-applicability determinations for certain regulations, allowing the WVDEP to confirm that identified regulations are not applicable to the wellpad. Note that explanations of non-applicability are limited to those regulations for which there may be some question of applicability specific to the operations at the wellpad. Regulations that are categorically non-applicable are not discussed (e.g., NSPS Subpart J, Standards of Performance for Petroleum Refineries).

#### 3.1. PREVENTION OF SIGNIFICANT DETERIORATION (PSD) SOURCE CLASSIFICATION

Federal construction permitting programs regulate new and modified sources of attainment pollutants under Prevention of Significant Deterioration (PSD). PSD regulations apply when a major source makes a change, such as installing new equipment or modifying existing equipment, and a significant increase in emissions results from the change. The wellpad is not a major source with respect to the PSD program since its potential emissions are below all the PSD thresholds. As such, PSD permitting is not triggered by this construction activity. EQT will monitor future construction activities at the site closely and will compare any future increase in emissions with the PSD thresholds to ensure these activities will not trigger this program.

#### 3.2. TITLE V OPERATING PERMIT PROGRAM

Title 40 of the Code of Federal Regulations Part 70 (40 CFR 70) establishes the federal Title V operating permit program. West Virginia has incorporated the provisions of this federal program in its Title V operating permit program in West Virginia Code of State Regulations (CSR) 45-30. The major source thresholds with respect to the West Virginia Title V operating permit program regulations are 10 tons per year (tpy) of a single HAP, 25 tpy of any combination of HAP and 100 tpy of all other regulated pollutants.<sup>6</sup> The potential emissions of all regulated pollutants are below the corresponding threshold(s) at this facility after the proposed project. Therefore, the wellpad is not a major source for Title V purposes.

#### 3.3. NEW SOURCE PERFORMANCE STANDARDS

New Source Performance Standards (NSPS), located in 40 CFR 60, require new, modified, or reconstructed sources to control emissions to the level achievable by the best demonstrated technology as specified in the applicable

---

<sup>6</sup> On June 23, 2014, the U.S Supreme Court decision in the case of *Utility Air Regulatory Group v. EPA* effectively changed the permitting procedures for GHGs under the PSD and Title V programs.



provisions. Moreover, any source subject to an NSPS is also subject to the general provisions of NSPS Subpart A, except where expressly noted. The following is a summary of applicability and non-applicability determinations for NSPS regulations of relevance to the wellpad.

### 3.3.1. NSPS Subparts D, Da, Db, and Dc

These subparts apply to steam generating units of various sizes, all greater than 10 MMBtu/hr. The proposed project does not include any steam generating units, therefore the requirements of these subparts do not apply.

### 3.3.2. NSPS Subparts K, Ka, and Kb

These subparts apply to storage tanks of certain sizes constructed, reconstructed, or modified during various time periods. Subpart K applies to storage tanks constructed, reconstructed, or modified prior to 1978, and Subpart Ka applies to those constructed, reconstructed, or modified prior to 1984. Both Subparts K and Ka apply to storage tanks with a capacity greater than 40,000 gallons. Subpart Kb applies to volatile organic liquid (VOL) storage tanks constructed, reconstructed, or modified after July 23, 1984 with a capacity equal to or greater than 75 m<sup>3</sup> (~19,813 gallons). All of the tanks at the wellpad have a capacity of 19,813 gallons or less. As such, Subparts K, Ka, and Kb do not apply to the storage tanks at the wellpad.

### 3.3.3. NSPS Subpart OOOO—Crude Oil and Natural Gas Production, Transmission, and Distribution

Subpart OOOO – *Standards of Performance for Crude Oil and Natural Gas Production, Transmission, and Distribution*, applies to affected facilities that commenced construction, reconstruction, or modification after August 23, 2011. This NSPS was published in the Federal Register on August 16, 2012, and amended in the Federal Register on September 23, 2013<sup>7</sup>. The list of potentially affected facilities includes:

- > Gas wellheads
- > Centrifugal compressors located between the wellhead and the point of custody transfer to the natural gas transmission and storage segment
- > Reciprocating compressors located between the wellhead and the point of custody transfer to the natural gas transmission and storage segment
- > Continuous bleed natural gas-driven pneumatic controllers with a bleed rate of > 6 scfh located between the wellhead and the point of custody transfer to the natural gas transmission and storage segment (excluding natural gas processing plants)
- > Continuous bleed natural gas-driven pneumatic controllers located at natural gas processing plants
- > Storage vessels in the production, processing, or transmission and storage segments
- > Sweetening units located onshore that process natural gas produced from either onshore or offshore wells

There will be eight (8) produced fluid storage vessels and one (1) sand separator storage vessel at the wellpad. Emissions from the proposed storage vessels will be controlled by one (1) enclosed combustor with a destruction efficiency greater than 95 percent. The storage vessels at the facility will each have potential VOC emissions less than 6 tpy based on the permit application materials and enforceable limits to be included in the G70-A permit. As such, per 60.5365(e), the tanks are not storage vessel affected facilities under the rule.

---

<sup>7</sup> 78 FR 54816 (<http://www.gpo.gov/fdsys/pkg/FR-2013-09-23/pdf/2013-22010.pdf>)

The pneumatic controllers were ordered and installed after August 23, 2011 and are therefore potentially subject to NSPS 0000. Per 60.5365(d)(2), a pneumatic controller affected facility is a single continuous bleed natural gas driven pneumatic controller operating at a natural gas bleed rate greater than 6 scfh. No pneumatic controllers installed will meet the definition of a pneumatic controller affected facility. Therefore, these units are not subject to the requirements of Subpart 0000.

### **3.3.4. Non-Applicability of All Other NSPS**

NSPS are developed for particular industrial source categories. Other than NSPS developed for natural gas processing plants (Subparts 0000) and associated equipment (Subparts D-Dc and K-Kb), the applicability of a particular NSPS to the wellpad can be readily ascertained based on the industrial source category covered. All other NSPS are categorically not applicable to the proposed project.

## **3.4. NATIONAL EMISSION STANDARDS FOR HAZARDOUS AIR POLLUTANTS (NESHAP)**

Part 63 NESHAP allowable emission limits are established on the basis of a maximum achievable control technology (MACT) determination for a particular major source. A HAP major source is defined as having potential emissions in excess of 25 tpy for total HAP and/or potential emissions in excess of 10 tpy for any individual HAP. The wellpad is an Area (minor) source of HAP since its potential emissions of HAP are less than the 10/25 major source thresholds. NESHAP apply to sources in specifically regulated industrial source categories (Clean Air Act Section 112(d)) or on a case-by-case basis (Section 112(g)) for facilities not regulated as a specific industrial source type. Besides 40 CFR 63 Subpart A (NESHAP Subpart A), which is similar to 40 CFR 60 Subpart A (NSPS Subpart A), the following NESHAP could potentially apply to the wellpad:

- > 40 CFR Part 63 Subpart HH – Oil and Natural Gas Production Facilities
- > 40 CFR Part 63 Subpart JJJJJJ – Industrial, Commercial, and Institutional Boilers

The applicability of these NESHAP Subparts is discussed in the following sections.

### **3.4.1. 40 CFR 63 Subpart HH - Oil and Natural Gas Production Facilities**

This standard contains requirements for both major and area sources of HAP. At area sources, the only affected source is a triethylene glycol (TEG) dehydration unit (§63.760(b)(2)). The wellpad does not include a triethylene glycol dehydration unit; therefore the requirements of this subpart do not apply.

### **3.4.2. 40 CFR 63 Subpart JJJJJJ - Industrial, Commercial, and Institutional Boilers**

This MACT standard applies to industrial, commercial, and institutional boilers of various sizes and fuel types at area sources. The wellpad does not include any boilers, or gas fired heaters; therefore the requirements of this subpart do not apply.

## **3.5. WEST VIRGINIA SIP REGULATIONS**

The wellpad is potentially subject to regulations contained in the West Virginia Code of State Regulations, Chapter 45 (Code of State Regulations). The Code of State Regulations fall under two main categories, those regulations that are generally applicable (e.g., permitting requirements), and those that have specific applicability (e.g., PM standards for manufacturing equipment).

### **3.5.1. 45 CSR 2: To Prevent and Control Particulate Air Pollution from Combustion of Fuel in Indirect Heat Exchangers**

45 CSR 2 applies to fuel burning units, defined as equipment burning fuel “for the primary purpose of producing heat or power by indirect heat transfer”. The TEGs and line heaters are fuel burning units and therefore must comply with this regulation. Per 45 CSR 2-3, opacity of emissions from units shall not exceed 10 percent. Per 45 CSR 2-4, PM emissions from the unit will not exceed a level of 0.09 multiplied by the heat design input in MMBtu/hr of the unit.

### **3.5.2. 45 CSR 4: To Prevent and Control the Discharge of Air Pollutants into the Air Which Causes or Contributes to an Objectionable Odor**

According to 45 CSR 4-3:

*No person shall cause, suffer, allow or permit the discharge of air pollutants which cause or contribute to an objectionable odor at any location occupied by the public.*

The wellpad is generally subject to this requirement. However, due to the nature of the process at the wellpad, production of objectionable odor from the wellpad during normal operation is unlikely.

### **3.5.3. 45 CSR 6: Control of Air Pollution from the Combustion of Refuse**

45 CSR 6 applies to activities involving incineration of refuse, defined as “the destruction of combustible refuse by burning in a furnace designed for that purpose. For the purposes of this rule, the destruction of any combustible liquid or gaseous material by burning in a flare or flare stack, thermal oxidizer or thermal catalytic oxidizer stack shall be considered incineration.” The enclosed combustor is an incinerator and therefore must comply with this regulation. Per 45 CSR 6-4.3, opacity of emissions from this unit shall not exceed 20 percent, except as provided by 4.4. PM emissions from this unit will not exceed the levels calculated in accordance with 6-4.1

### **3.5.4. 45 CSR 16: Standards of Performance for New Stationary Sources**

45 CSR 16-1 incorporates the federal Clean Air Act (CAA) standards of performance for new stationary sources set forth in 40 CFR Part 60 by reference. As such, by complying with all applicable requirements of 40 CFR Part 60 at the wellpad, EQT will be complying with 45 CSR 16.

### **3.5.5. 45 CSR 17: To Prevent and Control Particulate Matter Air Pollution from Materials Handling, Preparation, Storage and Other Sources of Fugitive Particulate Matter**

According to 45 CSR 17-3.1:

*No person shall cause, suffer, allow or permit fugitive particulate matter to be discharged beyond the boundary lines of the property lines of the property on which the discharge originates or at any public or residential location, which causes or contributes to statutory air pollution.*

Due to the nature of the activities at the wellpad, it is unlikely that fugitive particulate matter emissions will be emitted under normal operating conditions. However, EQT will take measures to ensure any fugitive particulate matter emissions will not cross the property boundary should any such emissions occur.

### **3.5.6. 45 CSR 21-28: Petroleum Liquid Storage in Fixed Roof Tanks**

45 CSR 21-28 applies to any fixed roof petroleum liquid storage tank with a capacity greater than 40,000 gallons. The capacity of each storage tank proposed for the wellpad is less than 40,000 gallons; therefore, 45 CSR 21-28 will not apply to the petroleum liquid storage tanks at this wellpad.

### **3.5.7. 45 CSR 34: Emissions Standards for Hazardous Air Pollutants**

45 CSR 34-1 incorporates the federal Clean Air Act (CAA) national emissions standards for hazardous air pollutants (NESHAPs) as set forth in 40 CFR Parts 61 and 63 by reference. As such, by complying with all applicable requirements of 40 CFR Parts 61 and 63 at the wellpad, EQT will be complying with 45 CSR 34. Note that there are no applicable requirements under 40 CFR Parts 61 and 63 for the wellpad.

### **3.5.8. Non-Applicability of Other SIP Rules**

A thorough examination of the West Virginia SIP rules with respect to applicability at the wellpad reveals many SIP regulations that do not apply or impose additional requirements on operations. Such SIP rules include those specific to a particular type of industrial operation that is categorically not applicable to the wellpad.

## 4. G70-A APPLICATION FORMS

---

The WVDEP permit application forms contained in this application include all applicable G70-A application forms including the required attachments.



WEST VIRGINIA  
DEPARTMENT OF ENVIRONMENTAL PROTECTION  
DIVISION OF AIR QUALITY  
601 57<sup>th</sup> Street, SE  
Charleston, WV 25304  
Phone: (304) 926-0475 • [www.dep.wv.gov/daq](http://www.dep.wv.gov/daq)

**APPLICATION FOR GENERAL  
PERMIT REGISTRATION**  
*CONSTRUCT, MODIFY, RELOCATE OR  
ADMINISTRATIVELY UPDATE  
A STATIONARY SOURCE OF AIR POLLUTANTS*

☒ CONSTRUCTION    ☐ MODIFICATION    ☐ RELOCATION    ☐ CLASS I ADMINISTRATIVE UPDATE  
☐ CLASS II ADMINISTRATIVE UPDATE

**CHECK WHICH TYPE OF GENERAL PERMIT REGISTRATION YOU ARE APPLYING FOR:**

- |  |   |
|--|---|
| <input type="checkbox"/> <b>G10-D</b> – Coal Preparation and Handling<br><input type="checkbox"/> <b>G20-B</b> – Hot Mix Asphalt<br><input type="checkbox"/> <b>G30-D</b> – Natural Gas Compressor Stations<br><input type="checkbox"/> <b>G33-A</b> – Spark Ignition Internal Combustion Engines<br><input type="checkbox"/> <b>G35-A</b> – Natural Gas Compressor Stations (Flare/Glycol Dehydration Unit) | <input type="checkbox"/> <b>G40-C</b> – Nonmetallic Minerals Processing<br><input type="checkbox"/> <b>G50-B</b> – Concrete Batch<br><input type="checkbox"/> <b>G60-C</b> – Class II Emergency Generator<br><input type="checkbox"/> <b>G65-C</b> – Class I Emergency Generator<br><input checked="" type="checkbox"/> <b>G70-A</b> – Class II Oil and Natural Gas Production Facility |
|--|---|

**SECTION I. GENERAL INFORMATION**

1. Name of applicant (as registered with the WV Secretary of State's Office): EQT Production Company		2. Federal Employer ID No. (FEIN): 25-0724685
3. Applicant's mailing address:  625 Liberty Avenue, Suite 1700 Pittsburgh, PA 15222	4. Applicant's physical address:  Elklick Run Rd. Coxs Mills, WV 26342	
5. If applicant is a subsidiary corporation, please provide the name of parent corporation:		
6. <b>WV BUSINESS REGISTRATION.</b> Is the applicant a resident of the State of West Virginia? <input checked="" type="checkbox"/> <b>YES</b> <input type="checkbox"/> <b>NO</b> – IF <b>YES</b> , provide a copy of the Certificate of <b>Incorporation/ Organization / Limited Partnership</b> (one page) including any name change amendments or other Business Registration Certificate as <b>Attachment A</b> . – IF <b>NO</b> , provide a copy of the <b>Certificate of Authority / Authority of LLC / Registration</b> (one page) including any name change amendments or other Business Certificate as <b>Attachment A</b> .		

**SECTION II. FACILITY INFORMATION**

7. Type of plant or facility (stationary source) to be constructed, modified, relocated or administratively updated (e.g., coal preparation plant, primary crusher, etc.): Natural gas production wellsite	8a. Standard Industrial Classification Classification (SIC) code: 1311    AND    8b. North American Industry System (NAICS) code: 211111
9. DAQ Plant ID No. (for existing facilities only): 017-00037	10. List all current 45CSR13 and other General Permit numbers associated with this process (for existing facilities only):  __R13-3000_____ _____

**A: PRIMARY OPERATING SITE INFORMATION**

11A. Facility name of primary operating site:  OXF-44 Pad _____	12A. Address of primary operating site:  Mailing: 625 Liberty Avenue, Suite 1700, Pittsburgh, PA 15222  Physical: _____	
13A. Does the applicant own, lease, have an option to buy, or otherwise have control of the proposed site? <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO — IF YES, please explain: Property is leased and held under production rights _____ — IF NO, YOU ARE NOT ELIGIBLE FOR A PERMIT FOR THIS SOURCE.		
14A. — For <b>Modifications or Administrative Updates</b> at an existing facility, please provide directions to the present location of the facility from the nearest state road; — For Construction or Relocation permits, please provide directions to the proposed new site location from the nearest state road. Include a <b>MAP as Attachment F</b> . From New Milton, head NW on Meathouse Fork toward Co Rte 25/2 (1.2mi). Turn left on WV-18S (9.8 mi). Turn right onto Grove Summers Rd (5.9miles). Turn left onto Sugar Run (0.6mi). Continue onto Summers Rd Brushy Fork (0.7mi) Turn left onto Middle Fork and continue onto Ellick Run (~1.6mi). The pad entrance road will be on your left.		
15A. Nearest city or town:  New Milton	16A. County:  Doddridge	17A. UTM Coordinates:  Northing (KM): 4,332.905 Easting (KM): 516.041 Zone: 17
18A. Briefly describe the proposed new operation or change (s) to the facility:  Construction and operation of two (2) additional natural gas wellheads, three (3) 400-bbl produced fluid storage vessel and one (1) 140-bbl sand separator storage vessel controlled by an enclosed combustion device, two (2) in-line heaters, and one (1) thermoelectric generator. Removal of five (5) 210-bbl produced fluid storage vessels.		19A. Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits):  Latitude: <u>39.145190°</u> Longitude: <u>-80.814370°</u>

**B: 1<sup>ST</sup> ALTERNATE OPERATING SITE INFORMATION (only available for G20, G40, & G50 General Permits)**

11B. Name of 1 <sup>st</sup> alternate operating site:  _N/A_____ _____	12B. Address of 1 <sup>st</sup> alternate operating site:  Mailing: _____ Physical: _____ _____	
13B. Does the applicant own, lease, have an option to buy, or otherwise have control of the proposed site? <input type="checkbox"/> YES <input type="checkbox"/> NO — IF YES, please explain: _____ _____ — IF NO, YOU ARE NOT ELIGIBLE FOR A PERMIT FOR THIS SOURCE.		
14B. — For <b>Modifications or Administrative Updates</b> at an existing facility, please provide directions to the present location of the facility from the nearest state road; — For Construction or Relocation permits, please provide directions to the proposed new site location from the nearest state road. Include a <b>MAP as Attachment F</b> .  _____ _____ _____		

15B. Nearest city or town:	16B. County:	17B. UTM Coordinates: Northing (KM): _____ Easting (KM): _____ Zone: _____
18B. Briefly describe the proposed new operation or change (s) to the facility:		19B. Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits): Latitude: _____ Longitude: _____

**C: 2<sup>ND</sup> ALTERNATE OPERATING SITE INFORMATION (only available for G20, G40, & G50 General Permits):**

11C. Name of 2 <sup>nd</sup> alternate operating site:  _N/A_	12C. Address of 2 <sup>nd</sup> alternate operating site:  Mailing: _____ Physical: _____	
13C. Does the applicant own, lease, have an option to buy, or otherwise have control of the proposed site? <input type="checkbox"/> YES <input type="checkbox"/> NO – IF <b>YES</b> , please explain: _____ _____ – IF <b>NO</b> , YOU ARE NOT ELIGIBLE FOR A PERMIT FOR THIS SOURCE.		
14C. – For <b>Modifications or Administrative Updates</b> at an existing facility, please provide directions to the present location of the facility from the nearest state road; – For Construction or Relocation permits, please provide directions to the proposed new site location from the nearest state road. Include a <b>MAP as Attachment F</b> . _____ _____ _____		
15C. Nearest city or town:	16C. County:	17C. UTM Coordinates: Northing (KM): _____ Easting (KM): _____ Zone: _____
18C. Briefly describe the proposed new operation or change (s) to the facility:		19C. Latitude & Longitude Coordinates (NAD83, Decimal Degrees to 5 digits): Latitude: _____ Longitude: _____
20. Provide the date of anticipated installation or change: ____/____/____2015____  <input type="checkbox"/> If this is an <b>After-The-Fact</b> permit application, provide the date upon which the proposed change did happen: : ____/____/____		21. Date of anticipated Start-up if registration is granted: ____/____/____2015____
22. Provide maximum projected <b>Operating Schedule</b> of activity/activities outlined in this application if other than 8760 hours/year. (Note: anything other than 24/7/52 may result in a restriction to the facility's operation).  Hours per day <u>24</u> Days per week <u>7</u> Weeks per year <u>52</u> Percentage of operation <u>100</u>		



### SECTION III. ATTACHMENTS AND SUPPORTING DOCUMENTS

23. Include a check payable to WVDEP – Division of Air Quality with the appropriate **application fee** (per 45CSR22 and 45CSR13).

24. Include a **Table of Contents** as the first page of your application package.

All of the required forms and additional information can be found under the Permitting Section (General Permits) of DAQ's website, or requested by phone.

25. Please check all attachments included with this permit application. Please refer to the appropriate reference document for an explanation of the attachments listed below.

- ☒ ATTACHMENT A : CURRENT BUSINESS CERTIFICATE
- ☒ ATTACHMENT B: PROCESS DESCRIPTION
- ☒ ATTACHMENT C: DESCRIPTION OF FUGITIVE EMISSIONS
- ☒ ATTACHMENT D: PROCESS FLOW DIAGRAM
- ☒ ATTACHMENT E: PLOT PLAN
- ☒ ATTACHMENT F: AREA MAP
- ☒ ATTACHMENT G: EQUIPMENT DATA SHEETS AND REGISTRATION SECTION APPLICABILITY FORM
- ☒ ATTACHMENT H: AIR POLLUTION CONTROL DEVICE SHEETS
- ☒ ATTACHMENT I: EMISSIONS CALCULATIONS
- ☒ ATTACHMENT J: CLASS I LEGAL ADVERTISEMENT
- ☒ ATTACHMENT K: ELECTRONIC SUBMITTAL
- ☒ ATTACHMENT L: GENERAL PERMIT REGISTRATION APPLICATION FEE
- ☐ ATTACHMENT M: SITING CRITERIA WAIVER (*Not Applicable*)
- ☐ ATTACHMENT N: MATERIAL SAFETY DATA SHEETS (MSDS) (*Not Applicable*)
- ☒ ATTACHMENT O: EMISSIONS SUMMARY SHEETS
- ☐ OTHER SUPPORTING DOCUMENTATION NOT DESCRIBED ABOVE (Equipment Drawings, Aggregation Discussion, etc.) (*Not Applicable*)

Please mail an original and two copies of the complete General Permit Registration Application with the signature(s) to the DAQ Permitting Section, at the address shown on the front page of this application. Please DO NOT fax permit applications. For questions regarding applications or West Virginia Air Pollution Rules and Regulations, please refer to the website shown on the front page of the application or call the phone number also provided on the front page of the application.

#### SECTION IV. CERTIFICATION OF INFORMATION

This General Permit Registration Application shall be signed below by a Responsible Official. A Responsible Official is a President, Vice President, Secretary, Treasurer, General Partner, General Manager, a member of a Board of Directors, or Owner, depending on business structure. A business may certify an Authorized Representative who shall have authority to bind the Corporation, Partnership, Limited Liability Company, Association, Joint Venture or Sole Proprietorship. Required records of daily throughput, hours of operation and maintenance, general correspondence, Emission Inventory, Certified Emission Statement, compliance certifications and all required notifications must be signed by a Responsible Official or an Authorized Representative. If a business wishes to certify an Authorized Representative, the official agreement below shall be checked off and the appropriate names and signatures entered. Any administratively incomplete or improperly signed or unsigned Registration Application will be returned to the applicant.

FOR A CORPORATION (domestic or foreign)

☒ I certify that I am a President, Vice President, Secretary, Treasurer or in charge of a principal business function of the corporation

FOR A PARTNERSHIP

☐ I certify that I am a General Partner

FOR A LIMITED LIABILITY COMPANY

☐ I certify that I am a General Partner or General Manager

FOR AN ASSOCIATION

☐ I certify that I am the President or a member of the Board of Directors

FOR A JOINT VENTURE

☐ I certify that I am the President, General Partner or General Manager

FOR A SOLE PROPRIETORSHIP

☐ I certify that I am the Owner and Proprietor

☒ I hereby certify that (please print or type) Kenneth Kirk is an Authorized Representative and in that capacity shall represent the interest of the business (e.g., Corporation, Partnership, Limited Liability Company, Association Joint Venture or Sole Proprietorship) and may obligate and legally bind the business. If the business changes its Authorized Representative, a Responsible Official shall notify the Director of the Office of Air Quality immediately, and/or,

I hereby certify that all information contained in this General Permit Registration Application and any supporting documents appended hereto is, to the best of my knowledge, true, accurate and complete, and that all reasonable efforts have been made to provide the most comprehensive information possible

Signature \_\_\_\_\_

(please use blue ink)

Responsible Official

Date

05/12/15

Name & Title \_\_\_\_\_

(please print or type)

Kenneth Kirk, Executive Vice President

Signature \_\_\_\_\_

(please use blue ink)

Authorized Representative (if applicable)

Date

Applicant's Name \_\_\_\_\_

Alex Bosiljevac – Environmental Coordinator

Phone & Fax \_\_\_\_\_

412-395-3699

Phone

412-395-7027

Fax

Email \_\_\_\_\_

abosiljevac@eqt.com

ATTACHMENT A

**Current Business Certificate**

**WEST VIRGINIA  
STATE TAX DEPARTMENT  
BUSINESS REGISTRATION  
CERTIFICATE**

ISSUED TO:  
**EQT PRODUCTION COMPANY  
625 LIBERTY AVE 1700  
PITTSBURGH, PA 15222-3114**

**BUSINESS REGISTRATION ACCOUNT NUMBER: 1022-8081**

This certificate is issued on: 08/4/2010

*This certificate is issued by  
the West Virginia State Tax Commissioner  
in accordance with Chapter 11, Article 12, of the West Virginia Code*

*The person or organization identified on this certificate is registered  
to conduct business in the State of West Virginia at the location above.*

This certificate is not transferrable and must be displayed at the location for which issued.  
This certificate shall be permanent until cessation of the business for which the certificate of registration  
was granted or until it is suspended, revoked or cancelled by the Tax Commissioner.

Change in name or change of location shall be considered a cessation of the business and a new  
certificate shall be required.

TRAVELING/STREET VENDORS: Must carry a copy of this certificate in every vehicle operated by them.  
CONTRACTORS, DRILLING OPERATORS, TIMBER/LOGGING OPERATIONS: Must have a copy of  
this certificate displayed at every job site within West Virginia.

## ATTACHMENT B

### Process Description

## **ATTACHMENT B: PROCESS DESCRIPTION**

This project involves the construction and operation of three (3) produced fluid storage tanks, one (1) sand separator storage tank, three (3) line heaters, and one (1) thermoelectric generator (TEG) at an existing natural gas production wellpad operation (OXF-44).

The OXF-44 wellpad currently consists of five (5) wells, each with the same basic operation. Two (2) additional wells will be added with this project. The incoming gas stream from the underground wells passes through a sand separator, where sand, water, and residual solids are displaced and transferred to the sand separator tank. The gas then flows into a three-phase separator which separates produced water and condensate from the gas stream. The produced water and condensate are transferred to the storage tanks, where vapors are controlled by a combustor. Vapors from the sand separator tank will also be controlled by the combustor. Once the tanks are filled, the contents are loaded into trucks for transport using vapor-balanced loading. At the wellpad, heat is provided by line heaters and electricity is provided by thermoelectric generators.

A process flow diagram is included as Attachment D.

## ATTACHMENT C

### Description of Fugitive Emissions

## G70-A FUGITIVE EMISSIONS SUMMARY SHEET

FUGITIVE EMISSIONS SUMMARY	All Regulated Pollutants Chemical Name/CAS <sup>1</sup>	Maximum Potential Uncontrolled Emissions <sup>2</sup>		Maximum Potential Controlled Emissions <sup>3</sup>		Est. Method Used <sup>4</sup>
		lb/hr	ton/yr	lb/hr	ton/yr	
Haul Road/Road Dust Emissions Paved Haul Roads	N/A	---	---	---	---	---
Unpaved Haul Roads	PM PM <sub>10</sub> PM <sub>2.5</sub>	1.43 0.36 0.04	6.24 1.59 0.16	1.43 0.36 0.04	6.24 1.59 0.16	O <sup>A</sup>
Loading/Unloading Operations	VOC HAP	0.44 0.01	1.93 0.04	0.15 <0.01	0.65 0.01	O <sup>B</sup>
Equipment Leaks	VOC CO <sub>2</sub> e HAP	Does not apply	13.65 838 0.37	Does not apply	13.65 838 0.37	O <sup>C</sup>
Blowdown Emissions	N/A	---	---	---	---	---
Other	N/A	---	---	---	---	---

<sup>A</sup> AP-42, Section 13.2.2.

<sup>B</sup> AP-42 Section 5.2.

<sup>C</sup> Protocol for Equipment Leak Estimates (EPA-453/R-95-017), Table 2-1, Nov. 1995.

<sup>1</sup> List all regulated air pollutants. Speciate VOCs, including all HAPs. Follow chemical name with Chemical Abstracts Service (CAS) number. LIST Acids, CO, CS<sub>2</sub>, VOCs, H<sub>2</sub>S, Inorganics, Lead, Organics, O<sub>3</sub>, NO, NO<sub>2</sub>, SO<sub>2</sub>, SO<sub>3</sub>, all applicable Greenhouse Gases (including CO<sub>2</sub> and methane), etc. DO NOT LIST H<sub>2</sub>, H<sub>2</sub>O, N<sub>2</sub>, O<sub>2</sub>, and Noble Gases.

<sup>2</sup> Give rate with no control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>3</sup> Give rate with proposed control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>4</sup> Indicate method used to determine emission rate as follows: MB = material balance; ST = stack test (give date of test); EE = engineering estimate; M = modeling; O = other (specify).




## LEAK SOURCE DATA SHEET

Source Category	Pollutant	Number of Source Components	Number of Components Monitored by Frequency	Average Time to Repair (days)	Estimated Annual Emission Rate (lb/yr) <sup>1</sup>
Pumps	light liquid VOC	1	TBD	TBD	384
	heavy liquid VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---
Valves	Gas VOC	341	TBD	TBD	7,863
	Light Liquid VOC	---	TBD	TBD	---
	Heavy Liquid VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---
Safety Relief Valves	Gas VOC	22	TBD	TBD	8,837
	Non VOC	---	TBD	TBD	---
Open-ended Lines	VOC	16	TBD	TBD	105
	Non-VOC	---	TBD	TBD	---
Sampling Connections	VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---
Compressors	VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---
Flanges	VOC	1,430	TBD	TBD	10,108
	Non-VOC	---	TBD	TBD	---
Other	VOC	---	TBD	TBD	---
	Non-VOC	---	TBD	TBD	---

<sup>1</sup> U.S. EPA. Office of Air Quality Planning and Standards. Protocol for Equipment Leak Emission Estimates. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCMI factors were used as it was representative of natural gas liquids extraction

## ATTACHMENT D


### Process Flow Diagram

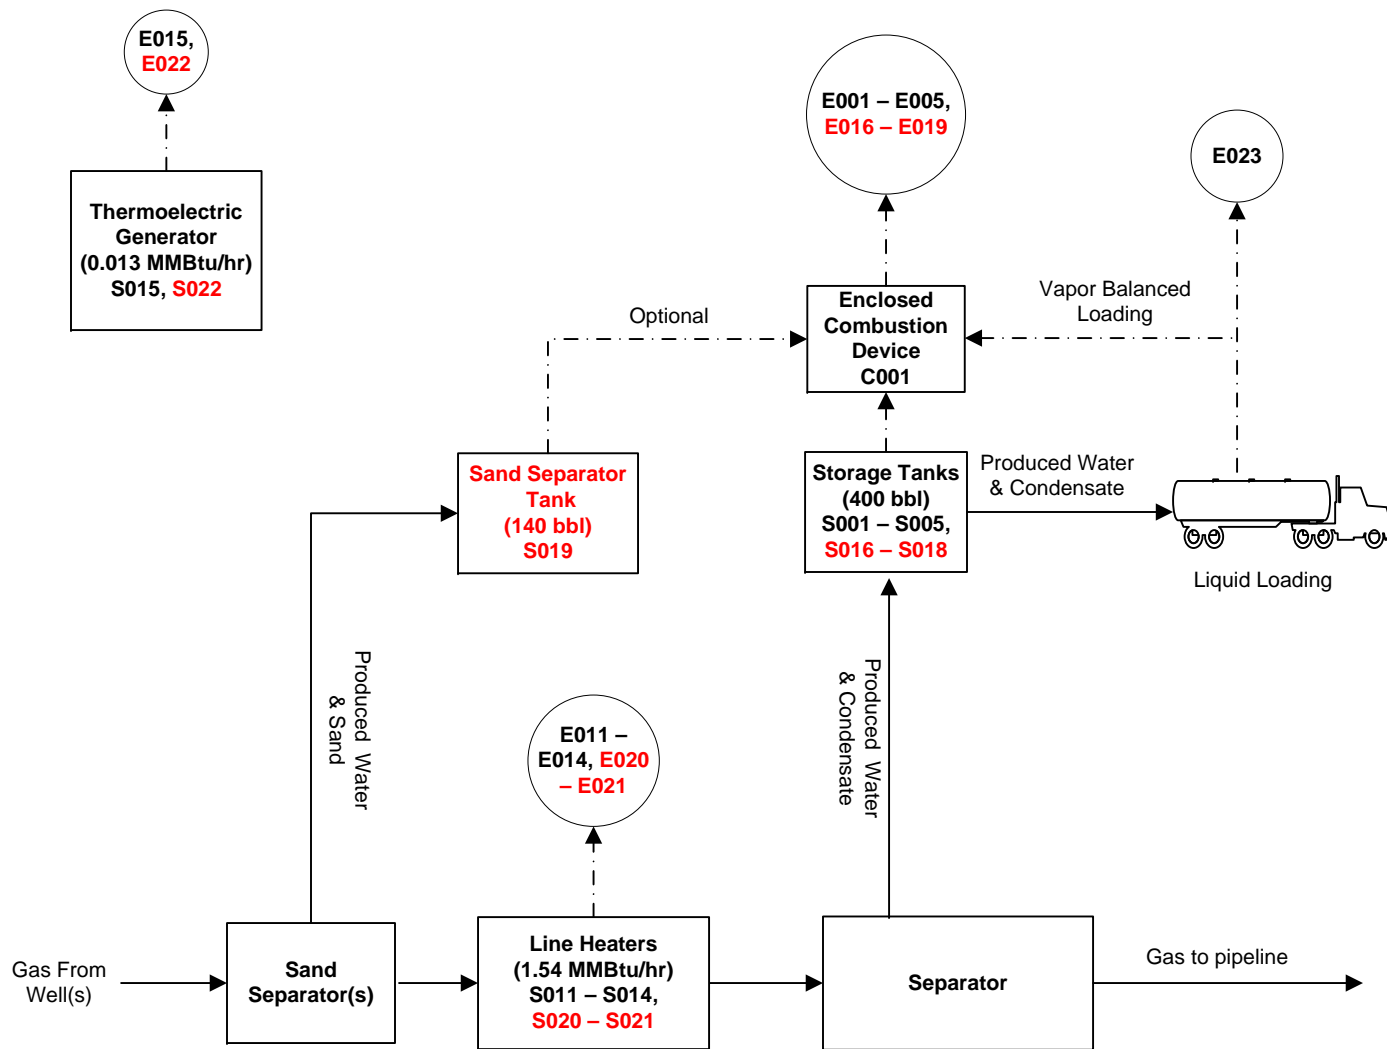

**EQT** Where energy meets innovation.  
EQT Production

## Process Flow Diagram OXF-44 Wellpad

### Flow Legend

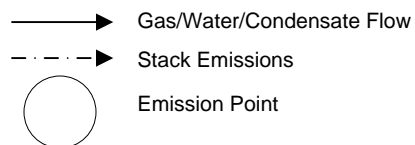


Trinity  
Consultants

May 2015

## ATTACHMENT E


### Plot Plan

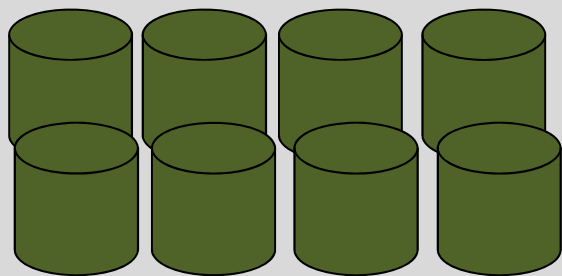

Tanks  
400 bbl  
(8)



Sand Separator  
Tank  
140 bbl





Thermoelectric  
Generators  
(2)



Combustor  
11.66  
MMBTU/hr

Line Heaters  
(6)

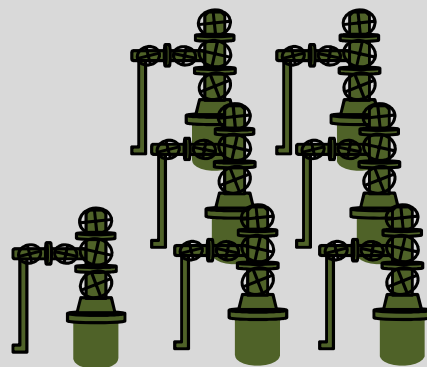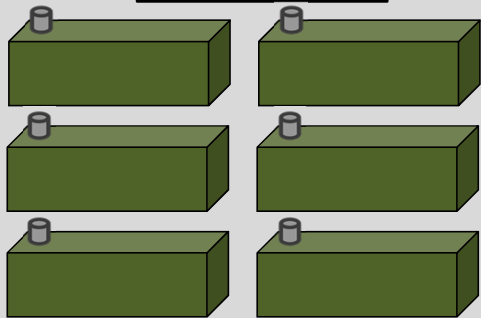

Wellheads  
(7)

NOTE: This diagram is not to scale.  
Locations and distances between surface  
equipment are not known at this time.

Entrance to OXF-44 pad

## ATTACHMENT F

### Area Map

## ATTACHMENT F: AREA MAP

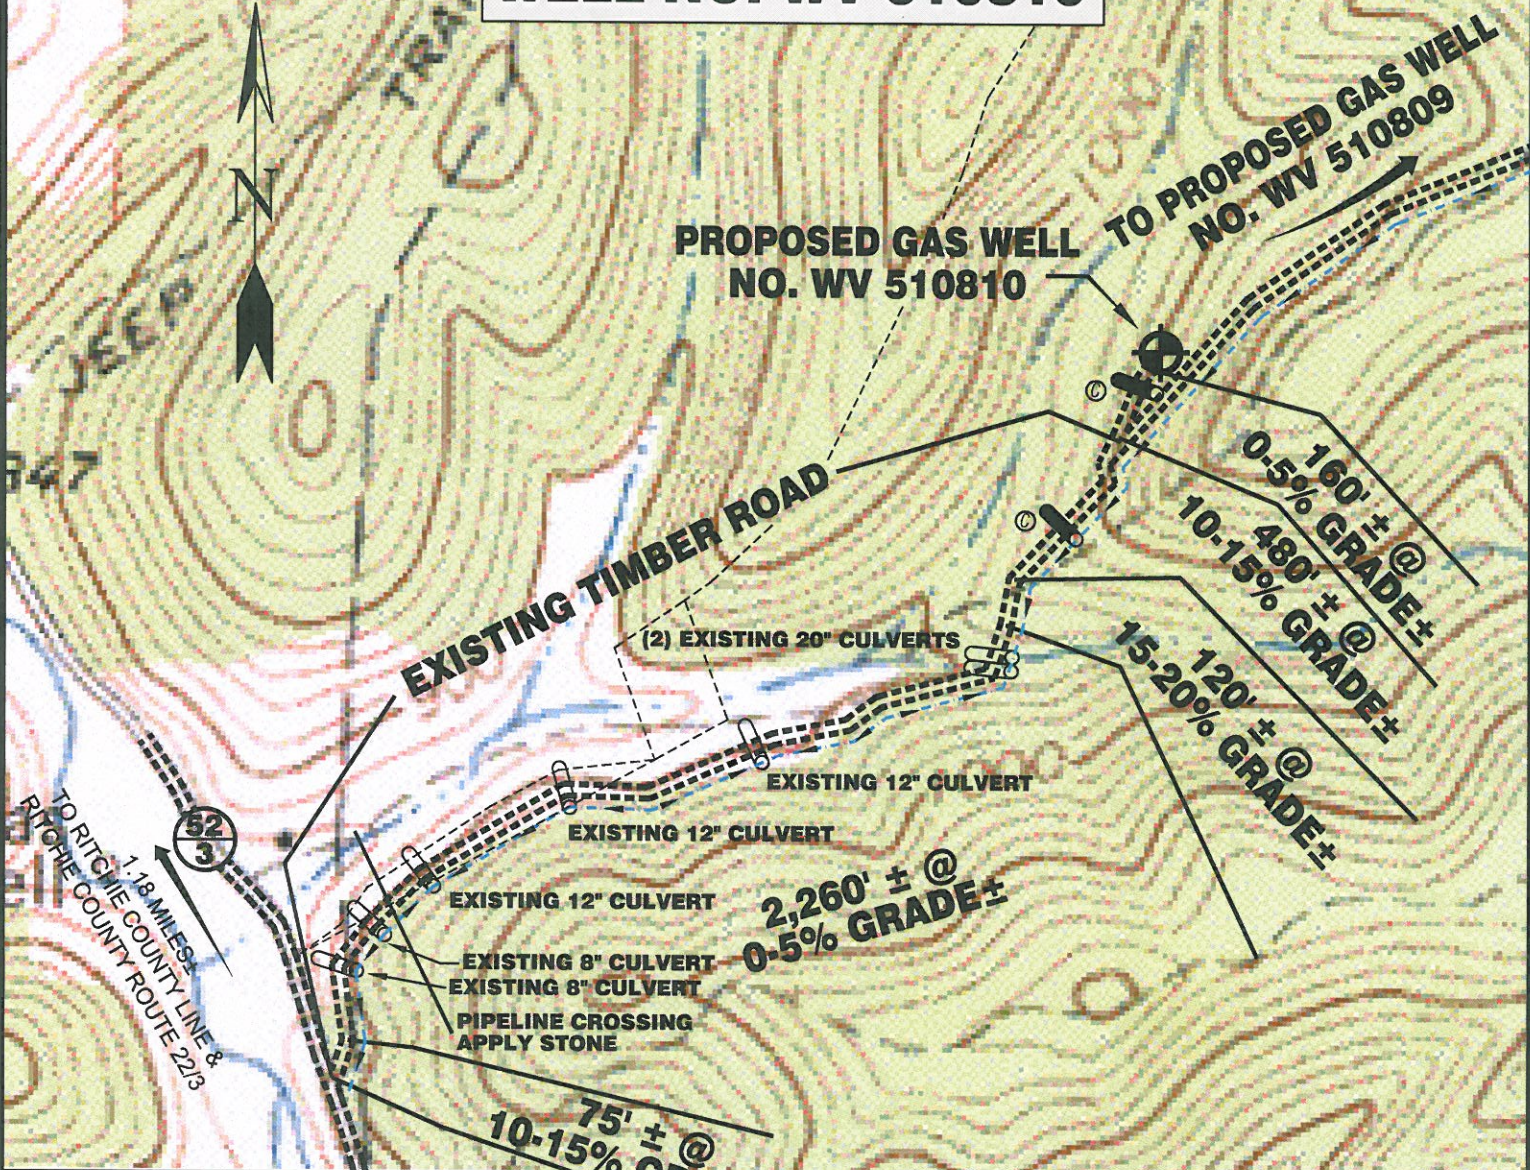


**Figure 1 - Map of OXF-44 Location**

UTM Northing (KM): 4,332.905  
UTM Easting (KM): 516.041  
Elevation: ~1,170 ft




J. LEESON LEASE  
WELL NO. WV 510810



Detail Sketch for Proposed Well WV 510810

NOT TO SCALE

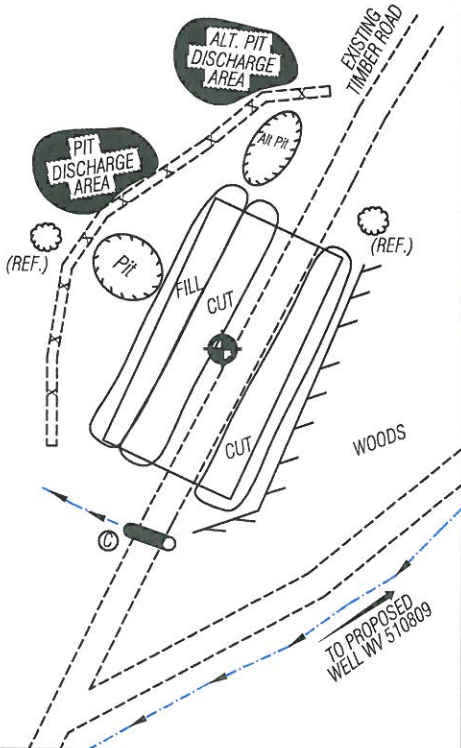

NOTE: THIS COPY IS PART OF A PREVIOUS  
REC. PLAN BEING USED FOR THE:  
WV 512418

SCALE: 1"=500'



TOPO SECTION OF  
USGS OXFORD 7.5' QUADRANGLE

PROPOSED CULVERT INVENTORY  
(FOR BID PURPOSES ONLY)

12" (MINIMUM) CULVERTS 2 CUL.

ADDITIONAL CULVERTS AND/OR OTHER DRAINAGE STRUCTURES & SEDIMENT CONTROL DEVICES MAY BE REQUIRED BY THE WV D.E.P. OIL & GAS INSPECTOR. OPERATOR IS RESPONSIBLE FOR COORDINATION WITH CONTRACTOR AND SLS REGARDING ANY CHANGES OR ADDITIONS THE STATE MAY REQUIRE.

Projected Earthen Disturbance Area

Well Location Site	1.00 ac. +/-
Access Road	2.18 ac. +/-
Approximate Total Disturbance	3.18 ac. +/-

ALL ROADS SHOWN HEREON ARE EXISTING UNLESS OTHERWISE NOTED AND SHALL BE MAINTAINED IN ACCORDANCE WITH WV D.E.P. OIL AND GAS BMP MANUAL ENTRANCES AT COUNTY/STATE ROADS SHALL BE MAINTAINED IN ACCORDANCE WITH WV D.O.T. REGULATION. SEPARATE PERMITS MAY BE REQUIRED BY THE D.O.T.

SEDIMENT BASINS (TRAPS) AND APPROPRIATE EROSION CONTROL BARRIERS ARE TO BE CONSTRUCTED AT ALL CULVERT AND CROSS DRAIN INLETS AND OUTLETS AS REQUIRED IN THE WV D.E.P. OIL AND GAS BMP MANUAL. FIELD CONDITIONS (ROCK OUTCROPS AND BEDROCK) MAY PROHIBIT INLET TRAPS BEING INSTALLED. WHEN THESE CONDITIONS EXIST ADDITIONAL EROSION CONTROL MEASURES SHALL BE EVALUATED AND UTILIZED AS NEEDED.

EARTHWORK CONTRACTORS ARE RESPONSIBLE FOR NOTIFICATION TO THE OPERATOR AND INSPECTOR PRIOR TO ANY DEVIATION FROM THIS PLAN.

TEMPORARY SEED & MULCH ALL SLOPES AFTER CONSTRUCTION OF LOCATION.

CUT & STACK ALL MARKETABLE TIMBER.

STACKED BRUSH MAY BE USED FOR SEDIMENT CONTROL.

APPLICATIONS FOR SEPARATE PLC PERMITS ON THE ACCESS ROAD STREAM CROSSINGS HAVE BEEN PREPARED (IF APPLIES).

= EXISTING CULVERT = PROPOSED CULVERT 12" MIN. UNLESS OTHERWISE NOTED  
 = PROPOSED STREAM CROSSING (IF APPLIES)  
\*SEE TABLE FOR CULVERT DETAIL



SMITH LAND SURVEYING, INC.  
P.O. BOX 150 GLENVILLE, WV. 26351  
PH: (304) 462-5634 FAX: (304) 462-5656 E-MAIL: [sls@slssurveys.com](mailto:sls@slssurveys.com)  
DRAWN BY D.L.P. FILE NO. 6113 DATE 07/25/06 CADD FILE: 6113RECWW510810.DWG



J. LEESON LEASE  
WELL NO. WV 510809

PROPOSED GAS WELL  
NO. WV 510809

RYAN  
(SURFACE)

BEGINNING  
NEW CONSTRUCTION

PROPOSED ROAD  
RUNS ON RIDGE

EXISTING TIMBER ROAD

PROPOSED GAS WELL  
NO. WV 510810

COASTAL  
(SURFACE)

570' ± @  
10-15% GRADE±

850' ± @  
5-10% GRADE±

125' ± @  
0-5% GRADE±

310' ± @  
15-20% GRADE±

170' ± @  
10-15% GRADE±

705' ± @  
0-5% GRADE±

270' ± @  
5-10% GRADE±

NOTE: SEE REC PLAN FOR WV 510810  
FOR INFO. FROM COUNTY ROUTE 52/3  
TO HERE.

NOTE: THIS COPY IS PART OF A PREVIOUS  
REC. PLAN BEING USED FOR THE:  
WV 512418

SCALE: 1"=500'



ALL ROADS SHOWN HEREON ARE EXISTING UNLESS OTHERWISE  
NOTED AND SHALL BE MAINTAINED IN ACCORDANCE WITH WV  
D.E.P. OIL AND GAS BMP MANUAL ENTRANCES AT COUNTY/STATE  
ROADS SHALL BE MAINTAINED IN ACCORDANCE WITH WV D.O.T.  
REGULATION. SEPARATE PERMITS MAY BE REQUIRED BY THE  
D.O.T.

SEDIMENT BASINS (TRAPS) AND APPROPRIATE EROSION CONTROL  
BARRIERS ARE TO BE CONSTRUCTED AT ALL CULVERT AND CROSS  
DRAIN INLETS AND OUTLETS AS REQUIRED IN THE WV D.E.P. OIL  
AND GAS BMP MANUAL. FIELD CONDITIONS (ROCK OUTCROPS  
AND BEDROCK) MAY PROHIBIT INLET TRAPS BEING INSTALLED.  
WHEN THESE CONDITIONS EXIST ADDITIONAL EROSION CONTROL  
MEASURES SHALL BE EVALUATED AND UTILIZED AS NEEDED.

EARTHWORK CONTRACTORS ARE RESPONSIBLE FOR  
NOTIFICATION TO THE OPERATOR AND INSPECTOR PRIOR TO ANY  
DEVIATION FROM THIS PLAN.

TEMPORARY SEED & MULCH ALL SLOPES AFTER CONSTRUCTION  
OF LOCATION.

CUT & STACK ALL MARKETABLE TIMBER.


STACKED BRUSH MAY BE USED FOR SEDIMENT CONTROL.

APPLICATIONS FOR SEPARATE PLC PERMITS ON THE ACCESS  
ROAD STREAM CROSSINGS HAVE BEEN PREPARED (IF APPLIES).

⊗ = EXISTING CULVERT    ⊙ = PROPOSED CULVERT  
12" MIN. UNLESS OTHERWISE NOTED  
⊗ = PROPOSED STREAM CROSSING (IF APPLIES)  
\*SEE TABLE FOR CULVERT DETAIL

Detail Sketch for Proposed Well WV 510809

NOT TO SCALE

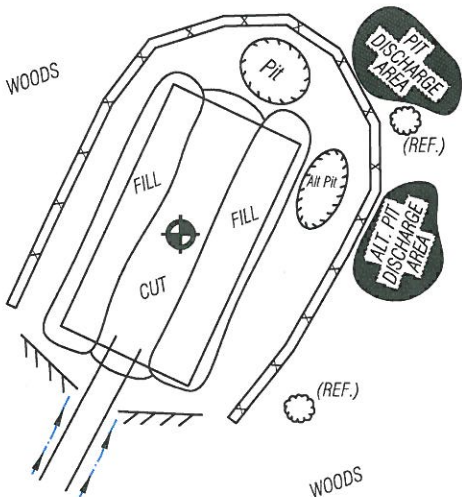

TOPO SECTION OF  
USGS OXFORD 7.5' QUADRANGLE

PROPOSED CULVERT INVENTORY  
(FOR BID PURPOSES ONLY)

12" (MINIMUM) CULVERTS    6 CUL.

ADDITIONAL CULVERTS AND/OR OTHER DRAINAGE STRUCTURES &  
SEDIMENT CONTROL DEVICES MAY BE REQUIRED BY THE WV D.E.P.  
OIL & GAS INSPECTOR.  
OPERATOR IS RESPONSIBLE FOR COORDINATION WITH CONTRACTOR  
AND SLS REGARDING ANY CHANGES OR ADDITIONS THE STATE MAY  
REQUIRE.

Projected Earthen Disturbance Area

Well Location Site	1.00 ac. +/-
Access Road	2.06 ac. +/-
Approximate Total Disturbance	3.06 ac. +/-



SMITH LAND SURVEYING, INC.  
P.O. BOX 150 GLENVILLE, WV. 26351  
PH: (304) 462-5634 FAX: (304) 462-5656 E-MAIL: [sls@slssurveys.com](mailto:sls@slssurveys.com)

DRAWN BY: D.L.P.    FILE NO.: 6113    DATE: 07/24/06    CADD FILE: 6113RECWW510809.DWG



EQT PRODUCTION COMPANY  
WELL NO. WV 512418

NOTE: SEE ATTACHED REC PLAN FOR  
WELL NO. WV 512428 FOR SHARED PITS.

PROPOSED GAS WELL  
NO. WV 512418

017-5289 GAS WELL  
NO. WV 510809

240' ± @  
5-10% GRADE±

1,160' ± @  
0-5% GRADE±

380' ± @  
5-10% GRADE±

210' ± @  
0-5% GRADE±


EXISTING  
ACCESS ROAD

017-5290 GAS WELL  
NO. WV 510810

NOTE: SEE REC PLAN FOR WV 510810 &  
WV 510809 FOR INFO. FROM COUNTY  
ROUTE 52/3 TO HERE.

Detail Sketch for Proposed Well WV 512418

NOT TO SCALE

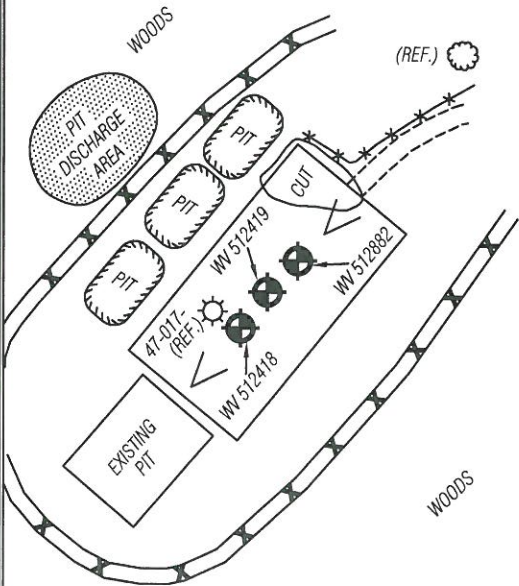

SCALE: 1"=500'

TOPO SECTION OF  
USGS OXFORD 7.5' QUADRANGLE

PROPOSED CULVERT INVENTORY  
(FOR BID PURPOSES ONLY)

12" (MINIMUM) CULVERTS 0 CUL.

ADDITIONAL CULVERTS AND/OR OTHER DRAINAGE STRUCTURES &  
SEDIMENT CONTROL DEVICES MAY BE REQUIRED BY THE WV D.E.P.  
OIL & GAS INSPECTOR.  
OPERATOR IS RESPONSIBLE FOR COORDINATION WITH CONTRACTOR  
AND SLS REGARDING ANY CHANGES OR ADDITIONS THE STATE MAY  
REQUIRE.

Projected Earthen Disturbance Area

Well Location Site	2.90 ac. +/-
Access Road	0.00 ac. +/-
Approximate Total Disturbance	2.90 ac. +/-

ALL ROADS SHOWN HEREON ARE EXISTING UNLESS OTHERWISE  
NOTED AND SHALL BE MAINTAINED IN ACCORDANCE WITH WV D.E.P.  
OIL AND GAS BMP MANUAL ENTRANCES AT COUNTY/STATE ROADS  
SHALL BE MAINTAINED IN ACCORDANCE WITH WV D.O.T.  
REGULATION. SEPARATE PERMITS MAY BE REQUIRED BY THE D.O.T.

SEDIMENT BASINS (TRAPS) AND APPROPRIATE EROSION CONTROL  
BARRIERS ARE TO BE CONSTRUCTED AT ALL CULVERT AND CROSS  
DRAIN INLETS AND OUTLETS AS REQUIRED IN THE WV D.E.P. OIL AND  
GAS BMP MANUAL. FIELD CONDITIONS (ROCK OUTCROPS AND  
BEDROCK) MAY PROHIBIT INLET TRAPS BEING INSTALLED. WHEN  
THESE CONDITIONS EXIST ADDITIONAL EROSION CONTROL  
MEASURES SHALL BE EVALUATED AND UTILIZED AS NEEDED.

EARTHWORK CONTRACTORS ARE RESPONSIBLE FOR NOTIFICATION TO  
THE OPERATOR AND INSPECTOR PRIOR TO ANY DEVIATION FROM  
THIS PLAN.

TEMPORARY SEED & MULCH ALL SLOPES AFTER CONSTRUCTION OF  
LOCATION.

CUT & STACK ALL MARKETABLE TIMBER.

STACKED BRUSH MAY BE USED FOR SEDIMENT CONTROL.

APPLICATIONS FOR SEPARATE PLC PERMITS ON THE ACCESS ROAD  
STREAM CROSSINGS HAVE BEEN PREPARED (IF APPLIES).

EXISTING CULVERT PROPOSED CULVERT  
12" MIN. UNLESS  
OTHERWISE NOTED

PROPOSED STREAM  
CROSSING (IF APPLIES)  
\*SEE TABLE FOR  
CULVERT DETAIL

APPLY ROCK/STONE  
TO EXISTING DIP  
(AS NEEDED)




SMITH LAND SURVEYING, INC.  
P.O. BOX 150 GLENVILLE, WV. 26351  
PH: (304) 462-5634 FAX: (304) 462-5656 E-MAIL: sls@slssurveys.com

DRAWN BY C.J.P. FILE NO. 6113 DATE 12/30/09 CADD FILE: 6113RECWW512418R2.DWG



EQT PRODUCTION COMPANY  
WELL NO. WV 512428

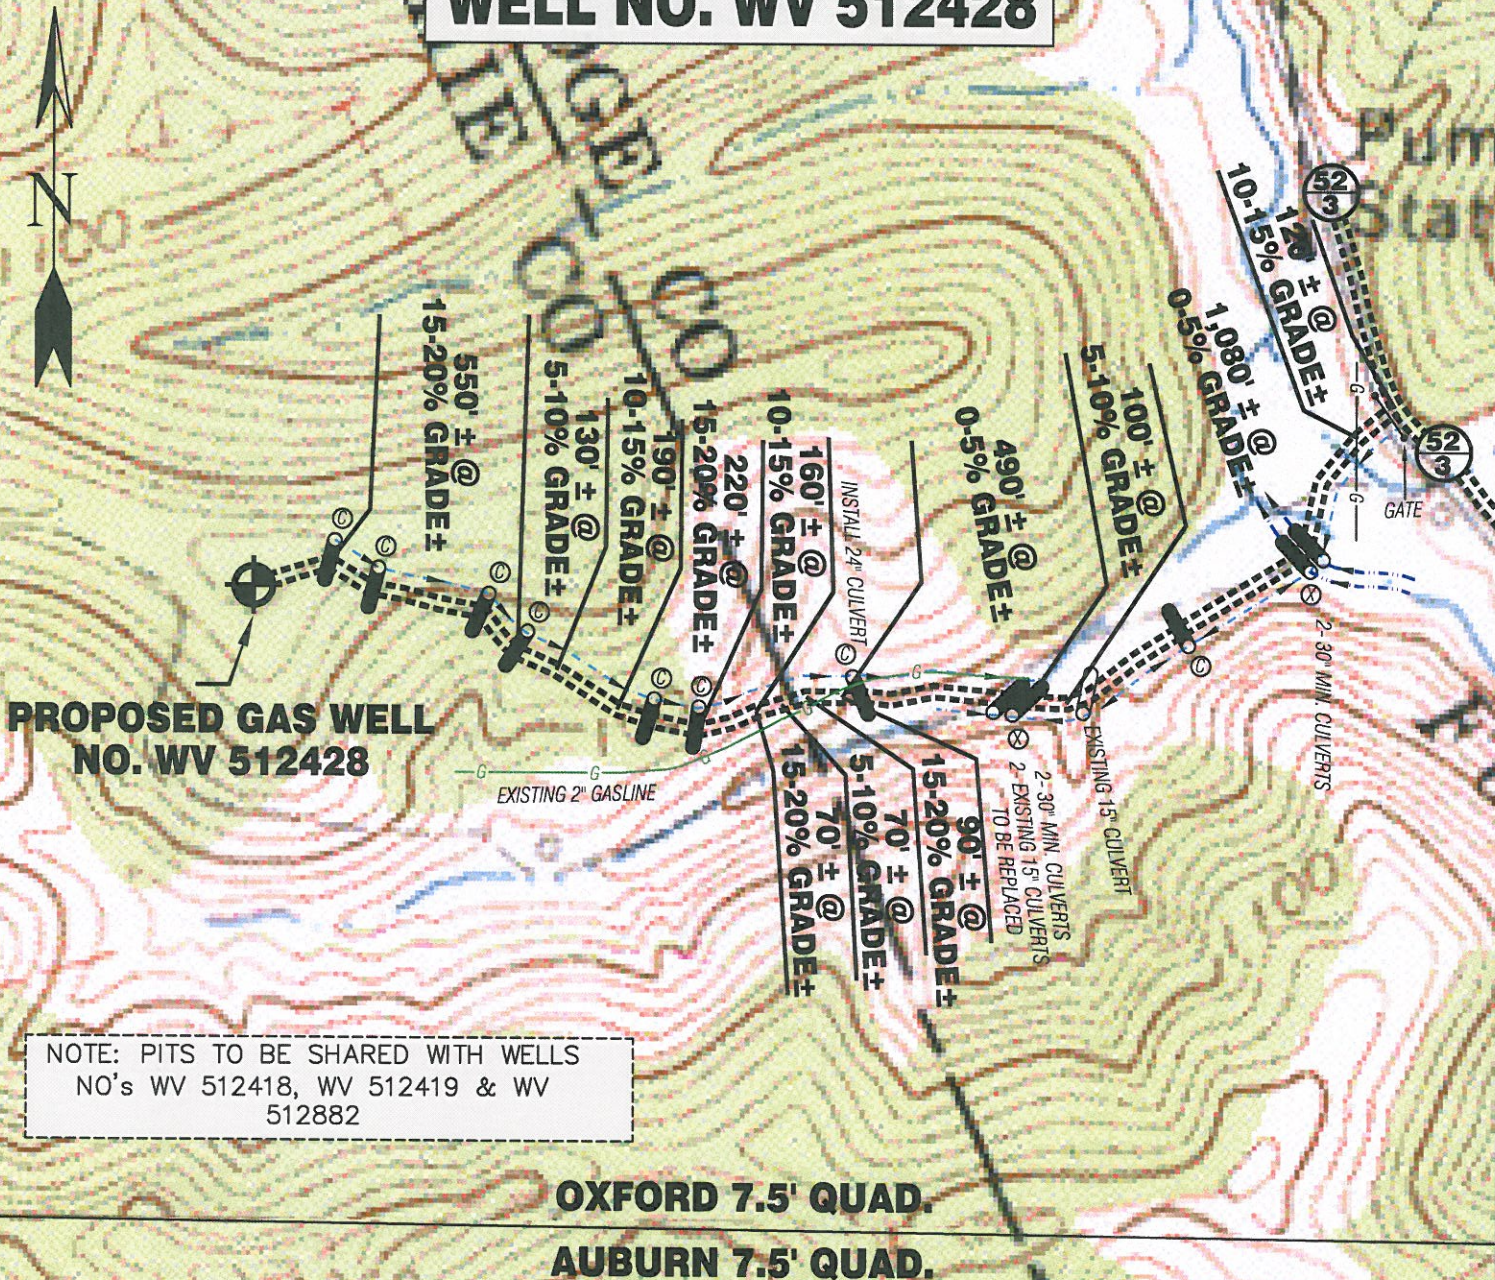


NOTE: PITS TO BE SHARED WITH WELLS  
NO's WV 512418, WV 512419 & WV  
512882

OXFORD 7.5' QUAD.  
AUBURN 7.5' QUAD.

Detail Sketch for Proposed Well WV 512428

NOT TO SCALE

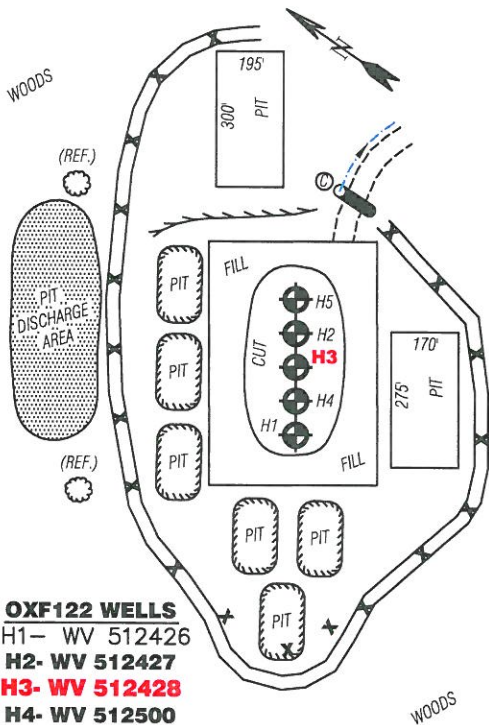

**OXF122 WELLS**  
H1- WV 512426  
H2- WV 512427  
**H3- WV 512428**  
H4- WV 512500  
H5- WV 512501

SCALE: 1"=500'



TOPO SECTION OF  
USGS OXFORD 7.5' QUADRANGLE

PROPOSED CULVERT INVENTORY  
(FOR BID PURPOSES ONLY)

12" (MINIMUM) CULVERTS	7 CUL.
30" (MINIMUM) CULVERTS	4 CUL.
24" (MINIMUM) CULVERTS	1 CUL.

ADDITIONAL CULVERTS AND/OR OTHER DRAINAGE STRUCTURES & SEDIMENT CONTROL DEVICES MAY BE REQUIRED BY THE WV D.E.P. OIL & GAS INSPECTOR. OPERATOR IS RESPONSIBLE FOR COORDINATION WITH CONTRACTOR AND SLS REGARDING ANY CHANGES OR ADDITIONS THE STATE MAY REQUIRE.

Projected Earthen Disturbance Area

Well Location Site	5.00 ac. +/-
Access Road	1.84 ac. +/-
Approximate Total Disturbance	6.84 ac. +/-

ALL ROADS SHOWN HEREON ARE EXISTING UNLESS OTHERWISE NOTED AND SHALL BE MAINTAINED IN ACCORDANCE WITH WV D.E.P. OIL AND GAS BMP MANUAL ENTRANCES AT COUNTY/STATE ROADS SHALL BE MAINTAINED IN ACCORDANCE WITH WV D.O.T. REGULATION. SEPARATE PERMITS MAY BE REQUIRED BY THE D.O.T.

SEDIMENT BASINS (TRAPS) AND APPROPRIATE EROSION CONTROL BARRIERS ARE TO BE CONSTRUCTED AT ALL CULVERT AND CROSS DRAIN INLETS AND OUTLETS AS REQUIRED IN THE WV D.E.P. OIL AND GAS BMP MANUAL. FIELD CONDITIONS (ROCK OUTCROPS AND BEDROCK) MAY PROHIBIT INLET TRAPS BEING INSTALLED. WHEN THESE CONDITIONS EXIST ADDITIONAL EROSION CONTROL MEASURES SHALL BE EVALUATED AND UTILIZED AS NEEDED.

EARTHWORK CONTRACTORS ARE RESPONSIBLE FOR NOTIFICATION TO THE OPERATOR AND INSPECTOR PRIOR TO ANY DEVIATION FROM THIS PLAN.

TEMPORARY SEED & MULCH ALL SLOPES AFTER CONSTRUCTION OF LOCATION.

CUT & STACK ALL MARKETABLE TIMBER.

STACKED BRUSH MAY BE USED FOR SEDIMENT CONTROL.

APPLICATIONS FOR SEPARATE PLC PERMITS ON THE ACCESS ROAD STREAM CROSSINGS HAVE BEEN PREPARED (IF APPLIES).

= EXISTING CULVERT = PROPOSED CULVERT 12" MIN. UNLESS OTHERWISE NOTED  
 = PROPOSED STREAM CROSSING (IF APPLIES)  
\*SEE TABLE FOR CULVERT DETAIL



## ATTACHMENT G

### Emission Unit Data Sheets and G70-A Section Applicability Form

## General Permit G70-A Registration Section Applicability Form

General Permit G70-A was developed to allow qualified applicants to seek registration for a variety of sources. These sources include natural gas well affected facilities, storage tanks, natural gas-fired compressor engines (RICE), natural gas producing units, natural gas-fired in-line heaters, pneumatic controllers, heater treaters, tank truck loading, glycol dehydration units, completion combustion devices, flares, enclosed combustion devices, and vapor recovery systems. All registered facilities will be subject to Sections 1.0, 2.0, 3.0, and 4.0.

General Permit G70-A allows the registrant to choose which sections of the permit they are seeking registration under. Therefore, please mark which additional sections that you are applying for registration under. If the applicant is seeking registration under multiple sections, please select all that apply. Please keep in mind, that if this registration is approved, the issued registration will state which sections will apply to your affected facility.

Section 5	Natural Gas Well Affected Facility	<input checked="" type="checkbox"/>
Section 6	Storage Vessels*	<input checked="" type="checkbox"/>
Section 7	Gas Producing Units, In-Line Heaters, Heater Treaters, and Glycol Dehydration Reboilers	<input checked="" type="checkbox"/>
Section 8	Pneumatic Controllers Affected Facility (NSPS, Subpart OOOO)	<input type="checkbox"/>
Section 9	<i>Reserved</i>	<input type="checkbox"/>
Section 10	Natural gas-fired Compressor Engine(s) (RICE) **	<input type="checkbox"/>
Section 11	Tank Truck Loading Facility ***	<input checked="" type="checkbox"/>
Section 12	Standards of Performance for Storage Vessel Affected Facilities (NSPS, Subpart OOOO)	<input type="checkbox"/>
Section 13	Standards of Performance for Stationary Spark Ignition Internal Combustion Engines (NSPS, Subpart JJJJ)	<input type="checkbox"/>
Section 14	Control Devices not subject to NSPS, Subpart OOOO	<input checked="" type="checkbox"/>
Section 15	National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines (40CFR63, Subpart ZZZZ)	<input type="checkbox"/>
Section 16	Glycol Dehydration Units	<input type="checkbox"/>
Section 17	Dehydration Units With Exemption from NESHAP Standard, Subpart HH § 63.764(d) (40CFR63, Subpart HH)	<input type="checkbox"/>
Section 18	Dehydration Units Subject to NESHAP Standard, Subpart HH and Not Located Within an UA/UC (40CFR63, Subpart HH)	<input type="checkbox"/>
Section 19	Dehydration Units Subject to NESHAP Standard, Subpart HH and Located Within an UA/UC (40CFR63, Subpart HH)	<input type="checkbox"/>

\* Applicants that are subject to Section 6 may also be subject to Section 12 if the applicant is subject to the NSPS, Subpart OOOO control requirements or the applicable control device requirements of Section 14.

\*\* Applicants that are subject to Section 10 may also be subject to the applicable RICE requirements of Section 13 and/or Section 15.

\*\*\* Applicants that are subject to Section 11 may also be subject to control device requirements of Section 14.

<b>Emission Units Table</b> <b>(includes all emission units and air pollution control devices</b> <b>that will be part of this permit application review, regardless of permitting status)</b>						
Emission Unit ID <sup>1</sup>	Emission Point ID <sup>2</sup>	Emission Unit Description	Year Installed/Modified	Design Capacity	Type <sup>3</sup> and Date of Change	Control Device <sup>4</sup>
S001	E001	Produced Fluid Storage Tank	2012	400 bbl	Existing; No change	C001
S002	E002	Produced Fluid Storage Tank	2012	400 bbl	Existing; No change	C001
S003	E003	Produced Fluid Storage Tank	2012	400 bbl	Existing; No change	C001
S004	E004	Produced Fluid Storage Tank	2012	400 bbl	Existing; No change	C001
S005	E005	Produced Fluid Storage Tank	2012	400 bbl	Existing; No change	C001
S006	E006	Produced Fluid Storage Tank	2012	210 bbl	Removed	NA
S007	E0007	Produced Fluid Storage Tank	2012	210 bbl	Removed	NA
S008	E008	Produced Fluid Storage Tank	2012	210 bbl	Removed	NA
S009	E009	Produced Fluid Storage Tank	2012	210 bbl	Removed	NA
S010	E010	Produced Fluid Storage Tank	2012	210 bbl	Removed	NA
S011	E011	Line Heater	2012	1.54 MMBtu/hr	Existing; No change	None
S012	E012	Line Heater	2012	1.54 MMBtu/hr	Existing; No change	None
S013	E013	Line Heater	2012	1.54 MMBtu/hr	Existing; No change	None
S014	E014	Line Heater	2012	1.54 MMBtu/hr	Existing; No change	None
S015	E015	Thermoelectric Generator	2012	0.013 MMBtu/hr	Existing; No change	None
S016	E016	Produced Fluid Storage Tank	TBD	400 bbl	New	C001
S017	E017	Produced Fluid Storage Tank	TBD	400 bbl	New	C001
S018	E018	Produced Fluid Storage Tank	TBD	400 bbl	New	C001
S019	E019	Sand Separator Storage Tank	TBD	140 bbl	New	C001 (Optional)
S020	E020	Line Heater	TBD	1.54 MMBtu/hr	New	None
S021	E021	Line Heater	TBD	1.54 MMBtu/hr	New	None

G70-A Oil and Natural Gas Production Facilities  
Instructions and Forms

---

S022	E022	Thermoelectric Generator	TBD	0.013 MMBtu/hr	New	None
S023	E023	Liquid Loading	2012	NA	Existing; No change	C001
C001	C001	Combustor	2012	11.66 MMBtu/hr	Existing; No change	NA

<sup>1</sup> For Emission Units (or Sources) use the following numbering system: 1S, 2S, 3S,... or other appropriate designation.

<sup>2</sup> For Emission Points use the following numbering system: 1E, 2E, 3E, ... or other appropriate designation.

<sup>3</sup> New, modification, removal

<sup>4</sup> For Control Devices use the following numbering system: 1C, 2C, 3C,... or other appropriate designation.

## NATURAL GAS WELL AFFECTED FACILITY DATA SHEET

*Complete this data sheet if you are the owner or operator of a gas well affected facility for which construction, modification, or reconstruction commenced after August 23, 2011. This form must be completed for natural gas well affected facilities regardless of when flowback operations occur (or have occurred).*

Please provide the API number(s) for each NG well at this facility:	
47-017-05640	
47-017-05986	
47-017-05987	
47-017-05988	
47-017-06025	
TBD	
TBD	

*Note: This is the same API well number(s) provided in the well completion notification and as provided to the WVDEP, Office of Oil and Gas for the well permit. The API number may be provided on the application without the state code (047).*

*Every oil and gas well permitted in West Virginia since 1929 has been issued an API (American Petroleum Institute) number. This API is used by agencies to identify and track oil and gas wells.*

*The API number has the following format: 047-001-00001*

*Where,*

*047 = State code. The state code for WV is 047.*

*001 = County Code. County codes are odd numbers, beginning with 001 (Barbour) and continuing to 109 (Wyoming).*

*00001= Well number. Each well will have a unique well number.*



## STORAGE VESSEL EMISSION UNIT DATA SHEET

Provide the following information for each new or modified bulk liquid storage tank.

### I. GENERAL INFORMATION (required)

1. Bulk Storage Area Name OXF-44 Wellpad	2. Tank Name Produced Fluid Tanks
3. Emission Unit ID number S001 – S005 (existing), <b>S016 – S018 (new)</b>	4. Emission Point ID number E001 – E005 (existing), <b>E016 – E018 (new)</b>
5. Date Installed or Modified ( <i>for existing tanks</i> ) S001 – S005 installed 2012; No change S016 – S018 installation TBD	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other
7A. Description of Tank Modification ( <i>if applicable</i> ) NA	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Provide any limitations on source operation affecting emissions. (production variation, etc.) None	

### II. TANK INFORMATION (required)

8. Design Capacity ( <i>specify barrels or gallons</i> ). Use the internal cross-sectional area multiplied by internal height. 400 bbl	
9A. Tank Internal Diameter (ft.) ~12	9B. Tank Internal Height (ft.) ~20
10A. Maximum Liquid Height (ft.) ~20	10B. Average Liquid Height (ft.) ~10
11A. Maximum Vapor Space Height (ft.) ~20	11B. Average Vapor Space Height (ft.) ~10
12. Nominal Capacity ( <i>specify barrels or gallons</i> ). This is also known as “working volume. 400 bbl	
13A. Maximum annual throughput (gal/yr) ~1,620,234 per tank	13B. Maximum daily throughput (gal/day) ~4,439 per tank
14. Number of tank turnovers per year ~97 per tank	15. Maximum tank fill rate (gal/min) TBD
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input checked="" type="checkbox"/> vertical <input type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input checked="" type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe)  <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical <input type="checkbox"/> Underground <input type="checkbox"/> Other (describe)	

### III. TANK CONSTRUCTION AND OPERATION INFORMATION (*check which one applies*)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 19 – 26 in section VII

**IV. SITE INFORMATION** (check which one applies)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 27 – 33 in section VII

**V. LIQUID INFORMATION** (check which one applies)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 34 – 39 in section VII

**VI. EMISSIONS AND CONTROL DEVICE DATA (required)**

40. Emission Control Devices (check as many as apply):									
<input type="checkbox"/> Does Not Apply					<input type="checkbox"/> Rupture Disc (psig)				
<input type="checkbox"/> Carbon Adsorption <sup>1</sup>					<input type="checkbox"/> Inert Gas Blanket of _____				
<input checked="" type="checkbox"/> Vent to Vapor Combustion Device <sup>1</sup> (vapor combustors, flares, thermal oxidizers)									
<input type="checkbox"/> Condenser <sup>1</sup>					<input checked="" type="checkbox"/> Conservation Vent (psig) – Enardo Valve				
<input type="checkbox"/> Other <sup>1</sup> (describe)					Vacuum Setting      Pressure Setting				
					<input checked="" type="checkbox"/> Emergency Relief Valve (psig)				
<sup>1</sup> Complete appropriate Air Pollution Control Device Sheet									
41. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).									
Material Name and CAS No.	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method <sup>1</sup>
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
See Attached Emission Calculations									

<sup>1</sup> EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)  
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

**SECTION VII (required if did not provide TANKS Summary Sheets)**

<b>TANK CONSTRUCTION AND OPERATION INFORMATION</b>		
19. Tank Shell Construction:		
<input type="checkbox"/> Riveted <input type="checkbox"/> Gunit lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded		
20A. Shell Color: Gray	20B. Roof Color: Gray	20C. Year Last Painted: New
21. Shell Condition (if metal and unlined):		
<input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable		
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?
23. Operating Pressure Range (psig): -0.03 to 0.70 psig		
24. Is the tank a <b>Vertical Fixed Roof Tank</b> ?	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft):
<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		0.06
25. Complete item 25 for <b>Floating Roof Tanks</b> <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>		
25A. Year Internal Floaters Installed:		

25A. Year Internal Floaters Installed:			
25B. Primary Seal Type ( <i>check one</i> ): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):			
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25D. If yes, how is the secondary seal mounted? ( <i>check one</i> ) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):			
25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for <b>Internal Floating Roof Tanks</b> <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft <sup>2</sup> ):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
<b>SITE INFORMATION:</b>			
27. Provide the city and state on which the data in this section are based: Elkins, WV			
28. Daily Avg. Ambient Temperature (°F): 49.06		29. Annual Avg. Maximum Temperature (°F): 61.15	
30. Annual Avg. Minimum Temperature (°F): 39.97		31. Avg. Wind Speed (mph): 6.17	
32. Annual Avg. Solar Insulation Factor (BTU/ft <sup>2</sup> -day): 1,193.87		33. Atmospheric Pressure (psia): 13.73	
<b>LIQUID INFORMATION:</b>			
34. Avg. daily temperature range of bulk liquid (°F): 51.30		34B. Maximum (°F):	
35. Avg. operating pressure range of tank (psig): -0.03 to 0.70		35B. Maximum (psig): 0.70	
36A. Minimum liquid surface temperature (°F): 46.54		36B. Corresponding vapor pressure (psia): 0.2441	
37A. Avg. liquid surface temperature (°F): 55.41		37B. Corresponding vapor pressure (psia): 0.3130	
38A. Maximum liquid surface temperature (°F): 64.27		38B. Corresponding vapor pressure (psia): 0.3992	
39. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
39A. Material name and composition:	Produced Fluid		
39B. CAS number:	TBD		
39C. Liquid density (lb/gal):	TBD		
39D. Liquid molecular weight (lb/lb-mole):	TBD		
39E. Vapor molecular weight (lb/lb-mole):	30.1928		
39F. Maximum true vapor pressure (psia):	TBD		
39G. Maxim Reid vapor pressure (psia):	TBD		
39H. Months Storage per year. From: To:	12 (All year)		

## STORAGE VESSEL EMISSION UNIT DATA SHEET

Provide the following information for each new or modified bulk liquid storage tank.

### I. GENERAL INFORMATION (required)

1. Bulk Storage Area Name OXF-44 Wellpad	2. Tank Name Sand Separator Tank
3. Emission Unit ID number S019	4. Emission Point ID number E019
5. Date Installed or Modified ( <i>for existing tanks</i> ) TBD	6. Type of change: <input checked="" type="checkbox"/> New construction <input type="checkbox"/> New stored material <input type="checkbox"/> Other
7A. Description of Tank Modification ( <i>if applicable</i> )	
7B. Will more than one material be stored in this tank? <i>If so, a separate form must be completed for each material.</i> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
7C. Provide any limitations on source operation affecting emissions. (production variation, etc.) None	

### II. TANK INFORMATION (required)

8. Design Capacity ( <i>specify barrels or gallons</i> ). Use the internal cross-sectional area multiplied by internal height. 140 bbl	
9A. Tank Internal Diameter (ft.) ~10	9B. Tank Internal Height (ft.) ~10
10A. Maximum Liquid Height (ft.) ~10	10B. Average Liquid Height (ft.) ~5
11A. Maximum Vapor Space Height (ft.) ~10	11B. Average Vapor Space Height (ft.) ~5
12. Nominal Capacity ( <i>specify barrels or gallons</i> ). This is also known as "working volume. 140 bbl	
13A. Maximum annual throughput (gal/yr) ~141,120	13B. Maximum daily throughput (gal/day) ~387
14. Number of tank turnovers per year ~24 per tank	15. Maximum tank fill rate (gal/min) TBD
16. Tank fill method <input type="checkbox"/> Submerged <input checked="" type="checkbox"/> Splash <input type="checkbox"/> Bottom Loading	
17. Is the tank system a variable vapor space system? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If yes, (A) What is the volume expansion capacity of the system (gal)? (B) What are the number of transfers into the system per year?	
18. Type of tank (check all that apply): <input checked="" type="checkbox"/> Fixed Roof <input type="checkbox"/> vertical <input checked="" type="checkbox"/> horizontal <input type="checkbox"/> flat roof <input type="checkbox"/> cone roof <input type="checkbox"/> dome roof <input type="checkbox"/> other (describe) <input type="checkbox"/> External Floating Roof <input type="checkbox"/> pontoon roof <input type="checkbox"/> double deck roof <input type="checkbox"/> Domed External (or Covered) Floating Roof <input type="checkbox"/> Internal Floating Roof <input type="checkbox"/> vertical column support <input type="checkbox"/> self-supporting <input type="checkbox"/> Variable Vapor Space <input type="checkbox"/> lifter roof <input type="checkbox"/> diaphragm <input type="checkbox"/> Pressurized <input type="checkbox"/> spherical <input type="checkbox"/> cylindrical <input type="checkbox"/> Underground <input type="checkbox"/> Other (describe)	

### III. TANK CONSTRUCTION AND OPERATION INFORMATION (*check which one applies*)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 19 – 26 in section VII

### IV. SITE INFORMATION (*check which one applies*)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 27 – 33 in section VII

**V. LIQUID INFORMATION** (check which one applies)

<input type="checkbox"/> Refer to enclosed TANKS Summary Sheets
<input checked="" type="checkbox"/> Refer to the responses to items 34 – 39 in section VII

**VI. EMISSIONS AND CONTROL DEVICE DATA (required)**

40. Emission Control Devices (check as many as apply):									
<input type="checkbox"/> Does Not Apply		<input type="checkbox"/> Rupture Disc (psig)							
<input type="checkbox"/> Carbon Adsorption <sup>1</sup>		<input type="checkbox"/> Inert Gas Blanket of _____							
<input checked="" type="checkbox"/> Vent to Vapor Combustion Device <sup>1</sup> (vapor combustors, flares, thermal oxidizers) (Optional)									
<input type="checkbox"/> Condenser <sup>1</sup>		<input type="checkbox"/> Conservation Vent (psig)							
<input type="checkbox"/> Other <sup>1</sup> (describe)		Vacuum Setting				Pressure Setting			
		<input type="checkbox"/> Emergency Relief Valve (psig)							
<sup>1</sup> Complete appropriate Air Pollution Control Device Sheet									
41. Expected Emission Rate (submit Test Data or Calculations here or elsewhere in the application).									
Material Name and CAS No.	Flashing Loss		Breathing Loss		Working Loss		Total Emissions Loss		Estimation Method <sup>1</sup>
	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	lb/hr	tpy	
See Attached Emission Calculations									

<sup>1</sup> EPA = EPA Emission Factor, MB = Material Balance, SS = Similar Source, ST = Similar Source Test, Throughput Data, O = Other (specify)  
Remember to attach emissions calculations, including TANKS Summary Sheets and other modeling summary sheets if applicable.

**SECTION VII (required if did not provide TANKS Summary Sheets)**

<b>TANK CONSTRUCTION AND OPERATION INFORMATION</b>		
19. Tank Shell Construction:		
<input type="checkbox"/> Riveted <input type="checkbox"/> Gunitite lined <input type="checkbox"/> Epoxy-coated rivets <input checked="" type="checkbox"/> Other (describe) Welded		
20A. Shell Color: Gray	20B. Roof Color: Gray	20C. Year Last Painted: New
21. Shell Condition (if metal and unlined):		
<input checked="" type="checkbox"/> No Rust <input type="checkbox"/> Light Rust <input type="checkbox"/> Dense Rust <input type="checkbox"/> Not applicable		
22A. Is the tank heated? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	22B. If yes, operating temperature:	22C. If yes, how is heat provided to tank?
23. Operating Pressure Range (psig): -0.03 to 0.70 psig		
24. Is the tank a <b>Vertical Fixed Roof Tank</b> ? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	24A. If yes, for dome roof provide radius (ft):	24B. If yes, for cone roof, provide slop (ft/ft):
25. Complete item 25 for <b>Floating Roof Tanks</b> <input type="checkbox"/> Does not apply <input checked="" type="checkbox"/>		
25A. Year Internal Floaters Installed:		
25B. Primary Seal Type (check one): <input type="checkbox"/> Metallic (mechanical) shoe seal <input type="checkbox"/> Liquid mounted resilient seal <input type="checkbox"/> Vapor mounted resilient seal <input type="checkbox"/> Other (describe):		
25C. Is the Floating Roof equipped with a secondary seal? <input type="checkbox"/> Yes <input type="checkbox"/> No		
25D. If yes, how is the secondary seal mounted? (check one) <input type="checkbox"/> Shoe <input type="checkbox"/> Rim <input type="checkbox"/> Other (describe):		

G70-A Oil and Natural Gas Production Facilities  
Instructions and Forms

25E. Is the floating roof equipped with a weather shield? <input type="checkbox"/> Yes <input type="checkbox"/> No			
25F. Describe deck fittings:			
26. Complete the following section for <b>Internal Floating Roof Tanks</b> <input checked="" type="checkbox"/> Does not apply			
26A. Deck Type: <input type="checkbox"/> Bolted <input type="checkbox"/> Welded		26B. For bolted decks, provide deck construction:	
26C. Deck seam. Continuous sheet construction: <input type="checkbox"/> 5 ft. wide <input type="checkbox"/> 6 ft. wide <input type="checkbox"/> 7 ft. wide <input type="checkbox"/> 5 x 7.5 ft. wide <input type="checkbox"/> 5 x 12 ft. wide <input type="checkbox"/> other (describe)			
26D. Deck seam length (ft.):	26E. Area of deck (ft <sup>2</sup> ):	26F. For column supported tanks, # of columns:	26G. For column supported tanks, diameter of column:
<b>SITE INFORMATION:</b>			
27. Provide the city and state on which the data in this section are based: Elkins, WV			
28. Daily Avg. Ambient Temperature (°F): 49.06		29. Annual Avg. Maximum Temperature (°F): 61.15	
30. Annual Avg. Minimum Temperature (°F): 39.97		31. Avg. Wind Speed (mph): 6.17	
32. Annual Avg. Solar Insulation Factor (BTU/ft <sup>2</sup> -day): 1,193.87		33. Atmospheric Pressure (psia): 13.73	
<b>LIQUID INFORMATION:</b>			
34. Avg. daily temperature range of bulk liquid (°F): 51.30	34A. Minimum (°F):	34B. Maximum (°F):	
35. Avg. operating pressure range of tank (psig): -0.03 to 0.70	35A. Minimum (psig): -0.03	35B. Maximum (psig): 0.70	
36A. Minimum liquid surface temperature (°F): 46.54		36B. Corresponding vapor pressure (psia): 0.2441	
37A. Avg. liquid surface temperature (°F): 55.41		37B. Corresponding vapor pressure (psia): 0.3130	
38A. Maximum liquid surface temperature (°F): 64.27		38B. Corresponding vapor pressure (psia): 0.3992	
39. Provide the following for each liquid or gas to be stored in the tank. Add additional pages if necessary.			
39A. Material name and composition:	Produced Fluid		
39B. CAS number:	TBD		
39C. Liquid density (lb/gal):	TBD		
39D. Liquid molecular weight (lb/lb-mole):	TBD		
39E. Vapor molecular weight (lb/lb-mole):	30.1928		
39F. Maximum true vapor pressure (psia):	TBD		
39G. Maxim Reid vapor pressure (psia):	TBD		
39H. Months Storage per year. From: To:	12 (All year)		

## NATURAL GAS FIRED FUEL BURNING UNITS EMISSION DATA SHEET

*Complete the information on this data for each Gas Producing Unit(s), Heater Treater(s), and in-line heater(s) at the production pad. Reboiler information should be entered on the Glycol Dehydration Emission Unit Data Sheet.*

Emission Unit ID # <sup>1</sup>	Emission Point ID# <sup>2</sup>	Emission Unit Description (Manufacturer / Model #)	Year Installed/ Modified	Type <sup>3</sup> and Date of Change	Control Device <sup>4</sup>	Design Heat Input (mmBtu/hr) <sup>5</sup>	Fuel Heating Value (Btu/scf) <sup>6</sup>
S011	E011	Line Heater	2012	Existing; No change	None	1.54	~1,225
S012	E012	Line Heater	2012	Existing; No change	None	1.54	~1,225
S013	E013	Line Heater	2012	Existing; No change	None	1.54	~1,225
S014	E014	Line Heater	2012	Existing; No change	None	1.54	~1,225
S015	E015	Thermoelectric Generator	2012	Existing; No change	None	0.013	~1,225
S020	E020	Line Heater	TBD	New	None	1.54	~1,225
S021	E021	Line Heater	TBD	New	None	1.54	~1,225
S022	E022	Thermoelectric Generator	TBD	New	None	0.013	~1,225

<sup>1</sup> Enter the appropriate Emission Unit (or Sources) identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For sources, use 1S, 2S, 3S...or other appropriate designation. Enter glycol dehydration unit Reboiler Vent data on the *Glycol Dehydration Unit Data Sheet*.

<sup>2</sup> Enter the appropriate Emission Point identification numbers for each fuel burning unit located at the production pad. Gas Producing Unit Burners should be designated GPU-1, GPU-2, etc. Heater Treaters should be designated HT-1, HT-2, etc. Heaters or Line Heaters should be designated LH-1, LH-2, etc. For emission points, use 1E, 2E, 3E...or other appropriate designation.

<sup>3</sup> New, modification, removal

<sup>4</sup> Complete appropriate air pollution control device sheet for any control device.

<sup>5</sup> Enter design heat input capacity in mmBtu/hr.

<sup>6</sup> Enter the fuel heating value in Btu/standard cubic foot.

## TANK TRUCK LOADING EMISSION UNIT DATA SHEET

*Furnish the following information for each new or modified bulk liquid transfer area or loading rack at the natural gas production pad. This form is to be used for bulk liquid transfer operations to tank trucks.*

1. Emission Unit ID: S023	2. Emission Point ID: E023	3. Year Installed/ Modified: Installed 2012	
4. Emission Unit Description: Liquid Loading			
5. Loading Area Data:			
5A. Number of pumps: 1	5B. Number of liquids loaded: 1	5C. Maximum number of tank trucks loading at one time: 1	
6. Describe cleaning location, compounds and procedure for tank trucks:			
7. Are tank trucks pressure tested for leaks at this or any other location? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No If YES, describe:			
8. Projected Maximum Operating Schedule (for rack or transfer point as a whole):			
Maximum	Jan. - Mar.	Apr. - June	July - Sept.
hours/day	As needed	As needed	As needed
days/week	As needed	As needed	As needed
9. Bulk Liquid Data ( <i>add pages as necessary</i> ):			
Liquid Name	Produced Fluids		
Max. daily throughput (1000 gal/day)	Variable		
Max. annual throughput (gal/yr)	13,102,992		
Loading Method <sup>1</sup>	SP		
Max. Fill Rate (gal/min)			
Average Fill Time (min/loading)			
Max. Bulk Liquid Temperature (°F)	51.30		
True Vapor Pressure <sup>2</sup>	0.3992		
Cargo Vessel Condition <sup>3</sup>	Unknown		
Control Equipment or Method <sup>4</sup>	VB		
Minimum collection efficiency (%)	70		
Minimum control efficiency (%)	95		
* Continued on next page			



Maximum Emission Rate	Loading (lb/hr)	VOC: 0.15 HAP: <0.01		
	Annual (ton/yr)	VOC: 0.65 HAP: 0.01		
Estimation Method <sup>5</sup>		EPA		
Notes:				
<sup>1</sup> BF = Bottom Fill    SP = Splash Fill    SUB = Submerged Fill				
<sup>2</sup> At maximum bulk liquid temperature				
<sup>3</sup> B = Ballasted Vessel, C = Cleaned, U = Uncleaned (dedicated service), O = other (describe)				
<sup>4</sup> List as many as apply (complete and submit appropriate <i>Air Pollution Control Device Sheets as Attachment "H"</i> ): CA = Carbon Adsorption VB = Dedicated Vapor Balance (closed system) ECD = Enclosed Combustion Device F = Flare TO = Thermal Oxidation or Incineration				
<sup>5</sup> EPA = EPA Emission Factor as stated in AP-42 MB = Material Balance TM = Test Measurement based upon test data submittal O = other (describe)				

<b>10. Proposed Monitoring, Recordkeeping, Reporting, and Testing</b> Please propose monitoring, recordkeeping, and reporting in order to demonstrate compliance with the proposed operating parameters. Please propose testing in order to demonstrate compliance with the proposed emissions limits.	
<b>MONITORING</b> <i>Please list and describe the process parameters and ranges that are proposed to be monitored in order to demonstrate compliance with the operation of this process equipment operation/air pollution control device.</i>  None	<b>RECORDKEEPING</b> <i>Please describe the proposed recordkeeping that will accompany the monitoring.</i>  None
<b>REPORTING</b> <i>Please describe the proposed frequency of reporting of the recordkeeping.</i>  None	<b>TESTING</b> <i>Please describe any proposed emissions testing for this process equipment/air pollution control device.</i>  None
11. Describe all operating ranges and maintenance procedures required by Manufacturer to maintain warranty: N/A	

## ATTACHMENT H

### Air Pollution Control Device Data Sheets

# AIR POLLUTION CONTROL DEVICE

## Vapor Combustion Control Device Sheet

*Complete this vapor combustion control device sheet for each enclosed combustion device, flare, thermal oxidizer, or completion combustion device that is located at the natural gas production pad for the purpose of thermally destructing waste gas to control emissions of regulated pollutants to the atmosphere.*

<b>IMPORTANT: READ THE INSTRUCTIONS ACCOMPANYING THIS FORM BEFORE COMPLETING.</b>			
<b>General Information</b>			
1. Control Device ID#: C001		2. Installation Date: 2012 <span style="float: right;"><input type="checkbox"/> New</span>	
3. Maximum Rated Total Flow Capacity: ~130 scf/min    ~188,380 scfd	4. Maximum Design Heat Input: 11.66 MMBtu/hr	5. Design Heat Content: 1,225 BTU/scf	
<b>Control Device Information</b>			
6. Select the type of vapor combustion control device being used: <input checked="" type="checkbox"/> Enclosed Combustion Device  <input type="checkbox"/> Elevated Flare <input type="checkbox"/> Ground Flare <input type="checkbox"/> Thermal Oxidizer <input type="checkbox"/> Completion Combustion Device			
7. Manufacturer: LEED Fabrication  Model No.: Enclosed Combustor 48"		8. Hours of operation per year: 8760	
9. List the emission units whose emissions are controlled by this vapor combustion control device: (Emission Point ID#: E001-E005, <span style="color: red;">E0016-E0019</span> , E023)			
10. Emission Unit ID#	Emission Source Description:	Emission Unit ID#	Emission Source Description:
S001 – S005, <span style="color: red;">S016 – S018</span>	Produced Fluid Storage Tanks		
<span style="color: red;">S019</span>	<span style="color: red;">Sand Separator Storage Tank</span>		
S023	Liquid Loading		
<i>If this vapor combustor controls emissions from more than six emission units, please attach additional pages.</i>			
11. Assist Type		12. Flare Height	13. Tip Diameter
<input type="checkbox"/> Steam - <input type="checkbox"/> Air - <input type="checkbox"/> Pressure - <input checked="" type="checkbox"/> Non -		~25 ft	~4 ft
		14. Was the design per §60.18? <input type="checkbox"/> Yes <input type="checkbox"/> No <b>NA</b>	
<b>Waste Gas Information</b>			
15. Maximum waste gas flow rate (scfm):	16. Heat value of waste gas stream (BTU/ft3)	17. Temperature of the emissions stream (°F)	18. Exit Velocity of the emissions stream (scf/min)
~130	Variable	~70	
19. Provide an attachment with the characteristics of the waste gas stream to be burned. <i>See attached emission calculations.</i>			

Pilot Information				
20. Type/Grade of pilot fuel:	21. Number of pilot lights:	22. Fuel flow rate to pilot flame per pilot (scf/hr):	23. Heat input per pilot (BTU/hr):	24. Will automatic re-ignition be used?
Pipeline quality natural gas	1	25	26,335	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
25. If automatic re-ignition will be used, describe the method: NA				
26. Describe the method of controlling flame: Three flame cells to stop the main flame front; One 2" flame arrestor on piping from drip pot to burner assembly.				
27. Is pilot flame equipped with a monitor to detect the presence of the flame?  <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No		28. If yes, what type? <input checked="" type="checkbox"/> Thermocouple <input type="checkbox"/> Infra-Red <input type="checkbox"/> Ultra Violet  <input type="checkbox"/> Camera with monitoring control room <input type="checkbox"/> Other, describe:		

29. Pollutant(s) Controlled	30. % Capture Efficiency	31. Manufacturer's Guaranteed Control Efficiency (%)
HC	100	≥ 95
VOC	100	≥ 95
HAP	100	≥ 95
32. Has the control device been tested by the manufacturer and certified?		
33. Describe all operating ranges and maintenance procedures required by the manufacturer to maintain warranty: See attached specification sheet.		
34. Additional Information Attached? <input checked="" type="checkbox"/> YES <input type="checkbox"/> NO  Please attach a copy of manufacturer's data sheet. Please attach a copy of manufacturer's drawing. Please attach a copy of the manufacturer's performance testing.		

**If any of the requested information is not available, please contact the manufacturer.**

## ATTACHMENT I

### Emission Calculations

Company Name: EOT Production, LLC  
Facility Name: OXF-44 Wellpad  
Project Description: G-70A Permit Application

### Site Wide Summary

Emission Source	Value	Units	Emission Unit ID(s)	Emission Point ID(s)	Control Device
Well(s)	7	per pad	---	---	---
Storage Tank(s)	8	per pad	S001 - S005, <b>S016 - S018</b>	E001- E005, <b>E016 - E018</b>	Combustor
Sand Separator Tank	1	per pad	<b>S019</b>	<b>E019</b>	Combustor
Line Heater(s)	6	per pad	S011 - S014, <b>S020 - S021</b>	E011 - E014, <b>E020 - E021</b>	None
Thermoelectric Generator(s) (TEGs)	2	per pad	S015, <b>S022</b>	E015, <b>E022</b>	None
Dehydrator(s)	0	per pad	---	---	---
Reboiler(s)	0	per pad	---	---	---
Dehy Drip Tank	0	per pad	---	---	---
Tank Combustor(s)	1	per pad	C001	C001	---
Dehy Combustor(s)	0	per pad	---	---	---
Length of lease road	2,300	feet	---	---	---

Constituent	Produced Fluid Storage Tanks (includes Combustor) (tpy)	Sand Separator Tank (tpy)	Line Heaters (tpy)	TEGs (tpy)	Fugitive Components (tpy)	Liquid Loading (tpy)	Haul Roads (tpy)	Total Emissions (tpy)
<b>Criteria Pollutants</b>								
NO <sub>x</sub>	4.18	---	3.299	0.01	---	---	---	<b>7.49</b>
CO	3.51	---	2.771	0.01	---	---	---	<b>6.29</b>
PM Total	0.32	---	0.251	7.0E-04	---	---	6.24	<b>6.81</b>
PM <sub>10</sub> Total	0.32	---	0.251	7.0E-04	---	---	1.59	<b>2.16</b>
PM <sub>2.5</sub> Total	0.32	---	0.251	7.0E-04	---	---	0.16	<b>0.73</b>
SO <sub>2</sub>	0.03	---	0.020	5.6E-05	---	---	---	<b>0.04</b>
VOC	26.11	0.30	0.181	5.1E-04	13.65	0.65	---	<b>40.89</b>
<b>Greenhouse Gases</b>								
CO <sub>2</sub>	5,988.64	---	4,730.29	13.28	0.22	---	---	<b>10,732</b>
CH <sub>4</sub>	8.55	0.10	0.09	2.5E-04	33.53	---	---	<b>42.27</b>
N <sub>2</sub> O	0.01	---	0.01	2.5E-05	---	---	---	<b>0.02</b>
CO <sub>2e</sub>	6,205.83	2.45	4,735.18	13.29	838.50	---	---	<b>11,795</b>
<b>Hazardous Air Pollutants</b>								
Methylnaphthalene (2-)	---	---	7.9E-07	2.2E-09	---	---	---	7.9E-07
Methylchloranthrene (3-)	---	---	5.9E-08	1.7E-10	---	---	---	6.0E-08
Dimethylbenz(a)anthracene (7,12-)	---	---	5.3E-07	1.5E-09	---	---	---	5.3E-07
Acenaphthene	---	---	5.9E-08	1.7E-10	---	---	---	6.0E-08
Acenaphthylene	---	---	5.9E-08	1.7E-10	---	---	---	6.0E-08
Anthracene	---	---	7.9E-08	2.2E-10	---	---	---	7.9E-08
Benz(a)anthracene	---	---	5.9E-08	1.7E-10	---	---	---	6.0E-08
Benzene	8.0E-03	<0.001	6.9E-05	1.9E-07	6.5E-03	3.2E-04	---	1.5E-02
Benzo(a)pyrene	---	---	4.0E-08	1.1E-10	---	---	---	4.0E-08
Benzo(b)fluoranthene	---	---	5.9E-08	1.7E-10	---	---	---	6.0E-08
Benzo(g,h,i)perylene	---	---	4.0E-08	1.1E-10	---	---	---	4.0E-08
Benzo(k)fluoranthene	---	---	5.9E-08	1.7E-10	---	---	---	6.0E-08
Chrysene	---	---	5.9E-08	1.7E-10	---	---	---	6.0E-08
Dibenzo(a,h)anthracene	---	---	4.0E-08	1.1E-10	---	---	---	4.0E-08
Dichlorobenzene	---	---	4.0E-05	1.1E-07	---	---	---	4.0E-05
Fluoranthene	---	---	9.9E-08	2.8E-10	---	---	---	9.9E-08
Fluorene	---	---	9.2E-08	2.6E-10	---	---	---	9.3E-08
Formaldehyde	---	---	2.5E-03	6.9E-06	---	---	---	2.5E-03
Hexane, n-	0.30	3.0E-03	5.9E-02	1.7E-04	0.20	1.3E-02	---	5.7E-01
Indeno(1,2,3-cd)pyrene	---	---	5.9E-08	1.7E-10	---	---	---	6.0E-08
Naphthalene	---	---	2.0E-05	5.7E-08	---	---	---	2.0E-05
Phenanthrene	---	---	5.6E-07	1.6E-09	---	---	---	5.6E-07
Pyrene	---	---	1.6E-07	4.6E-10	---	---	---	1.7E-07
Toluene	0.02	<0.001	1.1E-04	3.1E-07	0.01	6.1E-04	---	3.1E-02
Arsenic	---	---	6.6E-06	1.9E-08	---	---	---	6.6E-06
Beryllium	---	---	4.0E-07	1.1E-09	---	---	---	4.0E-07
Cadmium	---	---	3.6E-05	1.0E-07	---	---	---	3.6E-05
Chromium	---	---	4.6E-05	1.3E-07	---	---	---	4.6E-05
Cobalt	---	---	2.8E-06	7.8E-09	---	---	---	2.8E-06
Manganese	---	---	1.3E-05	3.5E-08	---	---	---	1.3E-05
Mercury	---	---	8.6E-06	2.4E-08	---	---	---	8.6E-06
Nickel	---	---	6.9E-05	1.9E-07	---	---	---	6.9E-05
Selenium	---	---	7.9E-07	2.2E-09	---	---	---	7.9E-07
Ethylbenzene	<0.001	<0.001	---	---	<0.001	3.4E-05	---	3.4E-05
Trimethylpentane (2,2,4-)	<0.001	<0.001	---	---	0.14	2.9E-05	---	1.4E-01
Xylene	8.0E-03	<0.001	---	---	7.1E-03	4.6E-04	---	1.6E-02
Total HAP	0.33	<0.001	0.06	1.7E-04	0.37	0.01	---	<b>0.77</b>

Company Name:  
Facility Name:  
Project Description:

EQT Production, LLC  
OXF-44 Wellpad  
G-70A Permit Application

### Produced Fluid Storage Tanks

Throughput Parameter	Value	Units
Operational Hours	8,760	hrs/yr
Total Produced Fluid Throughput for E&P <sup>1</sup>	22	bbl/day (per tank)
Total Condensate Throughput	5,040	bbl/month
Total Produced Water Throughput	20,678	bbl/month

Description	Potential Throughput <sup>2</sup> (gal/yr)
Produced Water and Condensate	12,961,872

<sup>1</sup> For the purposes of establishing PTE, produced water is conservatively assumed to contain 1% condensate. E&P Tank throughput is on a per-tank basis.

<sup>2</sup> Based on maximum historical produced water and condensate throughput for OXF-44 wellpad.

### Storage Tanks (400 bbl, each) - Uncontrolled (*Per tank*)

Constituent	Total Emissions <sup>1</sup>	
	lb/hr	tpy
Methane	4.816	21.096
Ethane	7.636	33.447
Propane	7.816	34.233
Isobutane	1.532	6.710
n-Butane	3.138	13.746
Isopentane	0.925	4.051
n-Pentane	0.785	3.440
n-Hexane	0.170	0.745
Cyclohexane	<0.001	<0.001
Other Hexanes	0.233	1.022
Heptanes	0.208	0.909
Benzene	0.007	0.029
Toluene	0.008	0.034
Ethylbenzene	<0.001	0.001
Xylenes	0.003	0.012
2,2,4-Trimethylpentane	<0.001	0.002
C8+ Heavies	0.081	0.352
<b>Total Emissions:</b>	27.464	120.292
<b>Total VOC Emissions:</b>	14.905	65.286
<b>Total HAP Emissions:</b>	0.187	0.820

<sup>1</sup> E&P TANK v2.0 calculates working, breathing and flashing losses and reports the sum as one total.

<sup>2</sup> E&P TANK v2.0 emission calculations are based on 5/14/2013 condensate sample from OXF-44 wellpad.

Control Efficiency of Combustor  
Pilot Rating  
Combustor Rating

95%
0.03 MMBtu/hr
11.66 MMBtu/hr

Guaranteed efficiency for Leed Enclosed Combustor  
Max. pilot fuel usage for Leed Enclosed Combustor  
Max. input from Leed Enclosed Combustor Operations Manual

Company Name:  
Facility Name:  
Project Description:

EQT Production, LLC  
OXF-44 Wellpad  
G-70A Permit Application

## Produced Fluid Storage Tanks

### Storage Tanks (400 bbl, each) - Controlled (Per tank)

Constituent	Total Emissions	
	lb/hr	tpy
Methane	0.241	1.055
Ethane	0.382	1.672
Propane	0.391	1.712
Isobutane	0.077	0.336
n-Butane	0.157	0.687
Isopentane	0.046	0.203
n-Pentane	0.039	0.172
n-Hexane	0.009	0.037
Cyclohexane	<0.001	<0.001
Other Hexanes	0.012	0.051
Heptanes	0.010	0.045
Benzene	<0.001	0.001
Toluene	<0.001	0.002
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	0.001
2,2,4-Trimethylpentane	<0.001	<0.001
C8+ Heavies	0.004	0.018
<b>Total Emissions:</b>	1.373	6.015
<b>Total VOC Emissions:</b>	0.745	3.264
<b>Total HAP Emissions:</b>	0.009	0.041

### Enclosed Combustor Emissions <sup>1</sup>

Pollutant <sup>2</sup>	Emission Factor (lb/MMBtu)	Combustor Potential Emissions		Pilot Potential Emissions	
		(lb/hr)	(tpy)	(lb/hr)	(tpy)
NO <sub>x</sub>	0.082	0.951	4.168	0.002	0.009
CO	0.069	0.799	3.501	0.002	0.008
PM/PM <sub>10</sub>	0.006	0.072	0.317	1.6E-04	0.001
SO <sub>2</sub>	4.9E-04	0.006	0.025	1.3E-05	5.65E-05
CO <sub>2</sub> (Natural Gas Firing)	116.997	1364.189	5975.146	3.081	13.495
CH <sub>4</sub> (Natural Gas Firing)	0.002	0.026	0.113	5.8E-05	2.54E-04
N <sub>2</sub> O (Natural Gas Firing)	2.2E-04	0.003	0.011	5.8E-06	2.54E-05

<sup>1</sup> Emission factors from AP-42 Ch. 1.4 for natural gas combustion were used as they were determined to be most representative of the process. Ch. 5.3 (Natural Gas Processing) was consulted, however, factors contained there are appropriate for amine gas sweetening processes, which is not the case at this facility. Also, Ch. 13.5 (Industrial Flares) was consulted, but since the control device in this case is an enclosed combustor vs. an elevated flare, these factors were also determined to be inappropriate.

<sup>2</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.



Company Name:  
Facility Name:  
Project Description:

EQT Production, LLC  
OXF-44 Wellpad  
G-70A Permit Application

### Sand Separator Tank

Throughput Parameter	Value	Units
Tank Capacity	5,880	gallons
Operational Hours	8,760	hrs/yr
Total Produced Water and Sand Throughput	280	bbl/month
Percent Produced Water	50%	
Total Produced Water Throughput	140	bbl/month

<sup>1</sup> Conservatively assumes 2 turnovers/month of sand and produced water.

Description	Potential Throughput (gal/yr)
Produced Water and Sand	141,120

#### Sand Separator Tank (140 bbl) - Uncontrolled (Per tank)

Constituent	Total Emissions <sup>1</sup>	
	lb/hr	tpy
Methane	0.022	0.098
Ethane	0.035	0.155
Propane	0.036	0.158
Isobutane	0.007	0.031
n-Butane	0.015	0.064
Isopentane	0.004	0.019
n-Pentane	0.004	0.016
n-Hexane	0.001	0.003
Cyclohexane	<0.001	<0.001
Other Hexanes	0.001	0.005
Heptanes	0.001	0.004
Benzene	<0.001	<0.001
Toluene	<0.001	<0.001
Ethylbenzene	<0.001	<0.001
Xylenes	<0.001	<0.001
2,2,4-Trimethylpentane	<0.001	<0.001
C8+ Heavies	<0.001	0.001
Total Emissions:	0.127	0.556
Total VOC Emissions:	0.069	0.302
Total HAP Emissions:	<0.001	<0.001

<sup>1</sup> E&P TANK 2.0 calculates working, breathing and flashing losses and reports the sum as one total.

<sup>2</sup> E&P TANK v2.0 emission calculations are based on 5/14/2013 condensate sample from OXF-44 wellpad.

**Company Name:** EQT Production, LLC  
**Facility Name:** OXF-44 Wellpad  
**Project Description:** G-70A Permit Application

### Line Heaters

Parameter	Value	Units
Fuel Used	Natural Gas	
Higher Heating Value (HHV)	1,225	BTU/scf
Heat Input	1.54	MMBtu/hr (each)
Fuel Consumption	1.26E-03	MMscf/hr (each)
Potential Annual Hours of Operation	8,760	hr/yr

### Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) <sup>1</sup>	Potential Emissions (lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
NO <sub>x</sub>	100	1.3E-01	5.5E-01
CO	84	1.1E-01	4.6E-01
SO <sub>2</sub>	0.6	7.5E-04	3.3E-03
PM Total	7.6	9.5E-03	4.2E-02
PM Condensable	5.7	7.2E-03	3.1E-02
PM <sub>10</sub> (Filterable)	1.9	2.4E-03	1.0E-02
PM <sub>2.5</sub> (Filterable)	1.9	2.4E-03	1.0E-02
VOC	5.5	6.9E-03	3.0E-02
Lead	5.0E-04	6.3E-07	2.7E-06
CO <sub>2</sub> (Natural Gas Firing) <sup>4</sup>	143,374	180	788
CH <sub>4</sub> (Natural Gas Firing) <sup>4</sup>	2.7	3.4E-03	1.5E-02
N <sub>2</sub> O (Natural Gas Firing) <sup>4</sup>	0.27	3.4E-04	1.5E-03

**Company Name:** EQT Production, LLC  
**Facility Name:** OXF-44 Wellpad  
**Project Description:** G-70A Permit Application

## Line Heaters

### Hazardous Air Pollutant (HAP) Potential Emissions:

	Emission Factor	Potential Emissions	
Pollutant	(lb/MMscf) <sup>1</sup>	(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
<b><u>HAPs:</u></b>			
Methylnaphthalene (2-)	2.4E-05	3.0E-08	1.3E-07
3-Methylchloranthrene	1.8E-06	2.3E-09	9.9E-09
7,12-Dimethylbenz(a)anthracene	1.6E-05	2.0E-08	8.8E-08
Acenaphthene	1.8E-06	2.3E-09	9.9E-09
Acenaphthylene	1.8E-06	2.3E-09	9.9E-09
Anthracene	2.4E-06	3.0E-09	1.3E-08
Benz(a)anthracene	1.8E-06	2.3E-09	9.9E-09
Benzene	2.1E-03	2.6E-06	1.2E-05
Benzo(a)pyrene	1.2E-06	1.5E-09	6.6E-09
Benzo(b)fluoranthene	1.8E-06	2.3E-09	9.9E-09
Benzo(g,h,i)perylene	1.2E-06	1.5E-09	6.6E-09
Benzo(k)fluoranthene	1.8E-06	2.3E-09	9.9E-09
Chrysene	1.8E-06	2.3E-09	9.9E-09
Dibenzo(a,h) anthracene	1.2E-06	1.5E-09	6.6E-09
Dichlorobenzene	1.2E-03	1.5E-06	6.6E-06
Fluoranthene	3.0E-06	3.8E-09	1.6E-08
Fluorene	2.8E-06	3.5E-09	1.5E-08
Formaldehyde	7.5E-02	9.4E-05	4.1E-04
Hexane	1.8E+00	2.3E-03	9.9E-03
Indo(1,2,3-cd)pyrene	1.8E-06	2.3E-09	9.9E-09
Naphthalene	6.1E-04	7.7E-07	3.4E-06
Phenanthrene	1.7E-05	2.1E-08	9.3E-08
Pyrene	5.0E-06	6.3E-09	2.7E-08
Toluene	3.4E-03	4.3E-06	1.9E-05
Arsenic	2.0E-04	2.5E-07	1.1E-06
Beryllium	1.2E-05	1.5E-08	6.6E-08
Cadmium	1.1E-03	1.4E-06	6.0E-06
Chromium	1.4E-03	1.8E-06	7.7E-06
Cobalt	8.4E-05	1.1E-07	4.6E-07
Manganese	3.8E-04	4.8E-07	2.1E-06
Mercury	2.6E-04	3.3E-07	1.4E-06
Nickel	2.1E-03	2.6E-06	1.2E-05
Selenium	2.4E-05	3.0E-08	1.3E-07
<b>Total HAP</b>		<b>2.4E-03</b>	<b>1.0E-02</b>

<sup>1</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, 1.4-3, & 1.4-4.

<sup>2</sup> Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf)

<sup>3</sup> Annual Emissions (tons/yr)<sub>Potential</sub> = (lb/hr)<sub>Emissions</sub> × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

<sup>4</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

**Company Name:** EQT Production, LLC  
**Facility Name:** OXF-44 Wellpad  
**Project Description:** G-70A Permit Application

### Thermoelectric Generators (TEGs)

Parameter	Value	Units
Manufacturer	Global Thermoelectric	
Fuel Used	Natural Gas	
Higher Heating Value (HHV)	1,225	BTU/scf
Heat Input	0.013	MMBtu/hr (each)
Fuel Consumption <sup>1</sup>	1.06E-05	MMscf/hr (each)
Potential Annual Hours of Operation	8,760	hr/yr

<sup>1</sup> Global Thermoelectric specification sheet states 311 f<sup>3</sup>/day at 1000 BTU/ft<sup>3</sup>.

### Criteria and Manufacturer Specific Pollutant Emission Rates:

Pollutant	Emission Factor (lb/MMscf) <sup>1</sup>	Potential Emissions	
		(lb/hr) <sup>2</sup>	(tons/yr) <sup>3</sup>
NO <sub>x</sub>	100	1.1E-03	4.6E-03
CO	84	8.9E-04	3.9E-03
SO <sub>2</sub>	0.6	6.3E-06	2.8E-05
PM Total	7.6	8.0E-05	3.5E-04
PM Condensable	5.7	6.0E-05	2.6E-04
PM <sub>10</sub> (Filterable)	1.9	2.0E-05	8.8E-05
PM <sub>2.5</sub> (Filterable)	1.9	2.0E-05	8.8E-05
VOC	5.5	5.8E-05	2.5E-04
Lead	5.00E-04	5.3E-09	2.3E-08
CO <sub>2</sub> (Natural Gas Firing) <sup>4</sup>	143,374	2	7
CH <sub>4</sub> (Natural Gas Firing) <sup>4</sup>	2.7	2.9E-05	1.3E-04
N <sub>2</sub> O (Natural Gas Firing) <sup>4</sup>	0.27	2.9E-06	1.3E-05

**Company Name:** EQT Production, LLC  
**Facility Name:** OXF-44 Wellpad  
**Project Description:** G-70A Permit Application

## Thermoelectric Generators (TEGs)

### Hazardous Air Pollutant (HAP) Potential Emissions:

Pollutant	Emission Factor (lb/MMscf) <sup>1</sup>	Potential Emissions (lb/hr) <sup>2</sup> (tons/yr) <sup>3</sup>
<b>HAPs:</b>		
Methylnaphthalene (2-)	2.4E-05	2.5E-10 1.1E-09
3-Methylchloranthrene	1.8E-06	1.9E-11 8.3E-11
7,12-Dimethylbenz(a)anthracene	1.6E-05	1.7E-10 7.4E-10
Acenaphthene	1.8E-06	1.9E-11 8.3E-11
Acenaphthylene	1.8E-06	1.9E-11 8.3E-11
Anthracene	2.4E-06	2.5E-11 1.1E-10
Benz(a)anthracene	1.8E-06	1.9E-11 8.3E-11
Benzene	2.1E-03	2.2E-08 9.7E-08
Benzo(a)pyrene	1.2E-06	1.3E-11 5.6E-11
Benzo(b)fluoranthene	1.8E-06	1.9E-11 8.3E-11
Benzo(g,h,i)perylene	1.2E-06	1.3E-11 5.6E-11
Benzo(k)fluoranthene	1.8E-06	1.9E-11 8.3E-11
Chrysene	1.8E-06	1.9E-11 8.3E-11
Dibenzo(a,h) anthracene	1.2E-06	1.3E-11 5.6E-11
Dichlorobenzene	1.2E-03	1.3E-08 5.6E-08
Fluoranthene	3.0E-06	3.2E-11 1.4E-10
Fluorene	2.8E-06	3.0E-11 1.3E-10
Formaldehyde	7.5E-02	7.9E-07 3.5E-06
Hexane	1.8E+00	1.9E-05 8.3E-05
Indo(1,2,3-cd)pyrene	1.8E-06	1.9E-11 8.3E-11
Naphthalene	6.1E-04	6.5E-09 2.8E-08
Phenanthrene	1.7E-05	1.8E-10 7.9E-10
Pyrene	5.0E-06	5.3E-11 2.3E-10
Toluene	3.4E-03	3.6E-08 1.6E-07
Arsenic	2.0E-04	2.1E-09 9.3E-09
Beryllium	1.2E-05	1.3E-10 5.6E-10
Cadmium	1.1E-03	1.2E-08 5.1E-08
Chromium	1.4E-03	1.5E-08 6.5E-08
Cobalt	8.4E-05	8.9E-10 3.9E-09
Manganese	3.8E-04	4.0E-09 1.8E-08
Mercury	2.6E-04	2.7E-09 1.2E-08
Nickel	2.1E-03	2.2E-08 9.7E-08
Selenium	2.4E-05	2.5E-10 1.1E-09
Total HAP		2.0E-05 8.7E-05

<sup>1</sup> Emission factors from AP-42 Section 1.4 "Natural Gas Combustion" Tables 1.4-1, 1.4-2, 1.4-3, & 1.4-4.

<sup>2</sup> Emission Rate (lb/hr) = Rated Capacity (MMscf/hr) × Emission Factor (lb/MMscf)

<sup>3</sup> Annual Emissions (tons/yr)<sub>Potential</sub> = (lb/hr)<sub>Emissions</sub> × (Maximum Allowable Operating Hours, 8760 hr/yr) × (1 ton/2000 lb).

<sup>4</sup> GHG Emission factors from Tables C-1 and C-2, 40 CFR 98, Subpart C.

Company Name:

EQT Production, LLC

Facility Name:

OXF-44 Wellpad

Project Description:

G-70A Permit Application

Fugitive Components

Component Counts

Facility Equipment Type <sup>1</sup>	Valves	Connectors	Open-Ended Lines	Pressure Relief Devices
Wellhead	8	38	0.5	0
Separators	1	6	0	0
Meters/Piping	12	45	0	0
Compressors	12	57	0	0
In-line heaters	14	65	2	1
Dehydrators	24	90	2	2

<sup>1</sup> Table W-1B to Subpart W of Part 98 — Default Average Component Counts for Major Onshore Natural Gas Production

Fugitive Emissions from Component Leaks

Equipment Type	Service	Emission Factors <sup>1</sup> (kg/hr/source)	Facility Equipment Count <sup>2</sup> (units)	TOC Total Fugitive Emissions (lb/hr)	TOC Annual Fugitive Emissions (tpy)
Valves	Gas	5.97E-03	341	4.49	19.66
Pump Seals	Light Liquid	1.99E-02	1	0.04	0.19
Pressure Relief Valves	Gas	1.04E-01	22	5.04	22.09
Connectors	All	1.83E-03	1,430	5.77	25.27
Open-Ended Lines	All	1.70E-03	16	0.06	0.26
Emission Totals:				15.41	67.47

<sup>1</sup> U.S. EPA. Office of Air Quality Planning and Standards. *Protocol for Equipment Leak Emission Estimates*. Table 2-1. (Research Triangle Park, NC: U.S. EPA EPA-453/R-95-017, 1995). SOCMI factors were used as it was representative of natural gas liquids extraction.

<sup>2</sup> Assumes one pump for liquid loading, no compressors or dehydrators, and one meter per wellhead. Pressure relief valves count includes an Enardo valve and Emergency Pressure Relief valve for each storage tank.

VOC and HAP Weight Fractions <sup>1</sup>

Service	Weight Fraction VOC	Weight Fraction Hexane	Weight Fraction Benzene	Weight Fraction Toluene	Weight Fraction Ethylbenzene	Weight Fraction 2,2,4-trimethylpentane	Weight Fraction Xylene
Gas	0.200	3.0E-03	9.7E-05	2.1E-04	<0.001	2.1E-03	1.1E-04
Light Liquid	1.000	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001
All	0.200	3.0E-03	9.7E-05	2.1E-04	<0.001	2.1E-03	1.1E-04

<sup>1</sup> All weight fractions from the same representative gas analyses used for other emission calculation

Company Name:

EQT Production, LLC

Facility Name:

OXF-44 Wellpad

Project Description:

G-70A Permit Application

Fugitive Components

VOC and HAP Fugitive Emissions

Pollutant	Hourly Fugitive Emissions (lb/hr)	Annual Fugitive Emissions (tpy)
VOC	3.116	13.65
Hexane	4.6E-02	2.0E-01
Benzene	1.5E-03	6.5E-03
Toluene	3.2E-03	1.4E-02
Ethylbenzene	<0.001	<0.001
2,2,4-trimethylpentane	3.2E-02	1.4E-01
Xylene	1.6E-03	7.1E-03
Total HAP	8.4E-02	3.7E-01

GHG Fugitive Emissions from Component Leaks

Component	Component Count <sup>1</sup>	GHG Emission Factor <sup>2</sup> (scf/hr/component)	CH <sub>4</sub> Emissions <sup>3,4</sup> (tpy)	CO <sub>2</sub> Emissions <sup>3,4</sup> (tpy)	CO <sub>2</sub> e Emissions <sup>5</sup> (tpy)
Connectors	1,430	3.0E-03	6.4E-01	4.1E-03	1.6E+01
Open-Ended Lines	16	6.1E-02	1.5E-01	9.4E-04	3.6E+00
Pressure Relief Devices	22	4.0E-02	1.3E-01	8.5E-04	3.3E+00
Pneumatic Devices	35	6.0E+00	3.1E+01	2.0E-01	7.8E+02
Valves	341	2.7E-02	1.4E+00	8.9E-03	3.4E+01
Total			33.5	0.217	838

<sup>1</sup> The component count for pneumatics assumes 5 pneumatics per well

<sup>2</sup> Population emission factors for gas service in the Eastern U.S. fromTable W-1A of Subpart W - Default Whole Gas Emission Factors for Onshore Production , 40 CFR 98, Subpart W, except for pneumatics, which are set at NSPS OOOO limits.

<sup>3</sup> Calculated in accordance with Equations W-31, W-35 and W-36 in Subpart W of 40 CFR 98.

<sup>4</sup> Mole fractions of CH<sub>4</sub> and CO<sub>2</sub> based on gas analysis:

CH<sub>4</sub>:

80.26%

CO<sub>2</sub>:

0.19%

<sup>5</sup> Carbon equivalent emissions (CO<sub>2</sub>e) are based on the following Global Warming Potentials (GWP) from 40 CFR Part 98, Table A-1:

Carbon Dioxide (CO<sub>2</sub>):

1

Methane (CH<sub>4</sub>):

25

Company Name: EOT Production, LLC  
 Facility Name: OXF-44 Wellpad  
 Project Description: G-70A Permit Application

## Liquid Loading

### Liquid Loading Losses:

Uncontrolled Loading Losses:  $L_L$  (lb/10<sup>3</sup> gal) = 12.46 (SPM)/T

Controlled Loading Losses:  $L_L$  (lb/10<sup>3</sup> gal) = 12.46 (SPM)/T \* (1 - collection efficiency \* control efficiency)

Parameter	Value	Description
S	1.00	saturation factor for vapor balancing (AP-42 Table 5.2-1)
Collection Efficiency	70%	collection efficiency for non-NSPS/MACT annual leak tested trucks
Control Efficiency	95%	control efficiency of combustor
P	0.40	max true vapor pressure of liquid loaded (psia) - EPA TANKS Data
M	30.19	molecular weight of vapors (lb/lb-mol) - EPA TANKS Data
T	511.0	temperature of liquids loaded (deg R) - EPA TANKS Data

Description	Loading	Maximum	VOC Emissions		
	Losses (lb/10 <sup>3</sup> gal)	Throughput <sup>1</sup> (gal)	Total Uncontrolled (tpy)	Uncontrolled Uncaptured (tpy)	Controlled <sup>2</sup> Captured (tpy)
Liquids Hauling	0.3	13,102,992	1.93	0.58	0.07

<sup>1</sup> Sum of the annual throughput from each well at the pad including the sand separator tank.

<sup>2</sup> Represents all vapors captured during liquid loading operations that are routed to the combustor for control.

### Speciated HAP Emission Potential:

Constituent	mol% <sup>1</sup>	True Vapor Pressure of Organic Compounds in liquid (psia) <sup>2</sup>	Partial Vapor Pressure (psia)	Mole Fraction	Molecular Weight	VOC Vapor Weight	Speciated Weight Fraction	Controlled Speciated Liquid Loading Emissions (tpy) <sup>3</sup>
Methane	0.095	---	---	---	---	---	---	---
Ethane	0.602	---	---	---	---	---	---	---
Propane	1.646	127.310	2.1E+00	3.2E-01	4.4E+01	1.4E+01	2.0E-01	1.3E-02
Isobutane	0.867	46.110	4.0E-01	6.1E-02	5.8E+01	3.6E+00	4.9E-02	3.3E-03
n-Butane	2.986	32.045	9.6E-01	1.5E-01	5.8E+01	8.5E+00	1.2E-01	7.9E-03
Isopentane	3.103	12.530	3.9E-01	5.9E-02	7.2E+01	4.3E+00	5.9E-02	4.0E-03
n-Pentane	3.943	8.433	3.3E-01	5.1E-02	7.2E+01	3.7E+00	5.1E-02	3.4E-03
n-Hexane	4.692	2.436	1.1E-01	1.7E-02	8.6E+01	1.5E+00	2.1E-02	1.4E-03
Other Hexanes	4.939	2.436	1.2E-01	1.8E-02	8.6E+01	1.6E+00	2.2E-02	1.5E-03
Heptanes	14.686	0.735	1.1E-01	1.7E-02	9.8E+01	1.6E+00	2.2E-02	1.5E-03
Benzene	0.200	1.508	3.0E-03	4.6E-04	7.8E+01	3.6E-02	5.0E-04	3.4E-05
Toluene	1.138	0.425	4.8E-03	7.4E-04	9.2E+01	6.8E-02	9.4E-04	6.4E-05
Ethylbenzene	0.155	0.151	2.3E-04	3.6E-05	1.1E+02	3.8E-03	5.3E-05	3.6E-06
Xylenes	1.763	0.180	3.2E-03	4.8E-04	1.1E+02	5.1E-02	7.1E-04	4.8E-05
2,2,4-Trimethylpentane	0.031	0.596	1.8E-04	2.8E-05	1.1E+02	3.2E-03	4.5E-05	3.0E-06
C8+ Heavies	59.154	3.400	2.0E+00	3.1E-01	1.1E+02	3.3E+01	4.6E-01	3.1E-02
	100.0		6.54			72.15	1.00	
Total Emissions:								0.07
Total HAP Emissions:								0.002

<sup>1</sup> An atmospheric analysis of a representative condensate sample (from wellpad OXF-131, Well #512441) is utilized to estimate the composition.

<sup>2</sup> Emission factors from AP-42 Section 7.1 "Liquid Storage Tanks" Tables 7.1-2, 7.1-3 and 7.1-5 (at 70 deg F or ~21 deg C) and Handbook of Chemistry and Physics: 84th Edition (at 295 K)

<sup>3</sup> Speciated emissions (tpy) = Speciated Weight Fraction x Calculated Controlled Liquid Loading Emissions (tpy). As methane and ethane will flash off prior to loading, the emissions from these constituents are not included in the speciation.



Company Name: EOT Production, LLC  
Facility Name: OXF-44 Wellpad  
Project Description: G-70A Permit Application

Haul Roads

Estimated Potential Road Fugitive Emissions

Unpaved Road Emissions

Unpaved Roads:  $E \text{ (lb/VMT)} = k(s/12)^a(W/3)^b \cdot [(365-p)/365]$

	PM	PM <sub>10</sub>	PM <sub>2.5</sub>	
k Factor (lb/VMT)	4.9	1.5	0.15	AP-42 Table 13.2.2-2 (Final, 11/06)
Silt content, s	4.8	%		AP-42 Table 13.2.2-1 (11/06), for Sand and Gravel Processing
Number of Rain Days, p	150			AP-42 Figure 13.2.1-2
a	0.7	0.9	0.9	AP-42 Table 13.2.2-2 (Final, 11/06)
b	0.45	0.45	0.45	AP-42 Table 13.2.2-2 (Final, 11/06)

Description	Weight of Empty Truck (tons)	Weight of Truck w/ Max Load (tons)	Mean Vehicle Weight (tons)	Length of Unpaved Road Traveled (mile/trip)	Trips Per Year	Mileage Per Year	Control (%)	Emissions (tpy)		
								PM	PM <sub>10</sub>	PM <sub>2.5</sub>
Liquids Hauling	20	40	30	0.87	3,276	2,854	0	6.11	1.56	0.156
Employee Vehicles	3	3	3	0.87	200	174	0	0.13	0.03	0.003
Total Potential Emissions								6.24	1.59	0.16

Company Name:EQT Production, LLC

Facility Name:OXF-44 Wellpad

Project Description:G-70A Permit Application

Combustor Flow Rate Calculations

TANK GAS STREAM (FROM E&P TANK v2.0)					
Component	lb/hr	lb-mol/hr	mol%	MW lb/lb-mol	MW in Mixture
Carbon Dioxide	0.112	0.003	0.000	44.01	0.02
Nitrogen	<0.001	<0.001	<0.001	28.00	<0.001
Methane	38.550	2.403	0.356	16.04	5.71
Ethane	61.123	2.033	0.301	30.07	9.05
Propane	62.564	1.419	0.210	44.10	9.27
Isobutane	12.263	0.211	0.031	58.12	1.82
n-Butane	25.119	0.432	0.064	58.12	3.72
Isopentane	7.404	0.103	0.015	72.15	1.10
n-Pentane	6.284	0.087	0.013	72.15	0.93
n-Hexane	1.361	0.016	0.002	85.67	0.20
Cyclohexane	<0.001	<0.001	<0.001	84.16	<0.001
Other Hexanes	1.865	0.022	0.003	86.18	0.28
Heptanes	1.665	0.017	0.003	97.88	0.25
2,2,4-Trimethylpentane	<0.001	<0.001	<0.001	114.23	<0.001
Benzene	0.056	7.2E-04	1.1E-04	78.11	0.01
Toluene	0.064	0.001	1.0E-04	92.14	0.01
Ethylbenzene	<0.001	<0.001	<0.001	106.17	<0.001
Xylenes	0.024	2.3E-04	3.3E-05	106.17	0.00
C8 + Heavies	0.648	0.006	0.001	107.73	0.096
Total	219.10	6.75		32.45	lb/lbmole

1. Representative gas stream from the produced water storage tanks, sand separator tank, and dehy tank flowing to the combustor.

C001		
Combustor Rating	11.66 MMBtu/hr	Max. input from Leed Enclosed Combustor Operations Manual
Pilot Rating	0.03 MMBtu/hr	Max. pilot fuel usage for Leed Enclosed Combustor
Pilot Rating	26,335 btu/hr	
Pilot Fuel Usage	21 scf/hr	
Combustor Flow Capacity	188.38 MSCFD	Max. flowrate from LEED Combustor Operations Manual
	7,849 scf/hr	
	131 scf/min	

Enclosed Combustor Mass Flow Rate (C001)

7,849

scf

hr

\*

1

lbmole

379

scf

\*

32.45

lb

lbmole

=

672

lb

hr

Mass flow rate (lb/hr) = Maximum Rated total flow capacity (scf/hr) \* Vapor Molecular Weight (lb/lbmole)  
Molar Gas Volume (scf/lbmole)

**Company Name:** EQT Production, LLC  
**Facility Name:** OXF-44 Wellpad  
**Project Description:** G-70A Permit Application

## Gas Analysis

**Sample Location:** Average of OXF-121 and OXF-136  
**Sample Date:** 5/30/2013  
**HHV (Btu/scf):** 1,225

Constituent	Natural Gas Stream Speciation (Mole %)	Molecular Weight	Molar Weight	Average Weight Fraction	Natural Gas Stream Speciation (Wt. %)
Carbon Dioxide	0.190	44.01	8.3E-02	4.1E-03	4.1E-01
Nitrogen	0.524	28.01	1.5E-01	7.3E-03	7.3E-01
Methane	80.257	16.04	1.3E+01	6.4E-01	6.4E+01
Ethane	12.984	30.07	3.9E+00	1.9E-01	1.9E+01
Propane	3.842	44.10	1.7E+00	8.4E-02	8.4E+00
Isobutane	0.490	58.12	2.8E-01	1.4E-02	1.4E+00
n-Butane	0.918	58.12	5.3E-01	2.6E-02	2.6E+00
Isopentane	0.243	72.15	1.8E-01	8.7E-03	8.7E-01
n-Pentane	0.217	72.15	1.6E-01	7.7E-03	7.7E-01
n-Hexane	0.070	86.18	6.0E-02	3.0E-03	3.0E-01
Cyclohexane	0.011	84.16	9.3E-03	4.6E-04	4.6E-02
Other Hexanes	0.114	86.18	9.8E-02	4.8E-03	4.8E-01
Heptanes	0.080	100.21	8.0E-02	4.0E-03	4.0E-01
2,2,4-Trimethylpentane	0.037	114.23	4.2E-02	2.1E-03	2.1E-01
Benzene*	0.003	78.11	2.0E-03	9.7E-05	9.7E-03
Toluene*	0.005	92.14	4.1E-03	2.1E-04	2.1E-02
Ethylbenzene*	<0.001	106.17	<0.001	<0.001	<0.001
Xylenes*	0.002	106.16	2.1E-03	1.1E-04	1.1E-02
C8 + Heavies	0.017	114.23	1.9E-02	9.6E-04	9.6E-02
Totals	100		20.17	1.00	100

TOC (Total)	99.29	98.86
VOC (Total)	6.05	15.67
HAP (Total)	0.12	0.55

# 2015-0406\_EQT\_OXF-44\_G70\_Produced Fluid Tanks.txt

\*\*\*\*\*  
\*\*\*\*\*

## \* Project Setup Information

\*

\*\*\*\*\*  
\*\*\*\*\*

Project File : \\tsclient\Z\Client\EQT Corporation\West Virginia\WV  
Production Wells\153901.0056 WV Wellpads 2015\OXF 44\02 Draft\Attach I - Emission  
Calcs\E&P Tank\2015-0406\_EQT\_OXF-44\_G70\_Produced Fluid Tanks.ept  
Flowsheet Selection : Oil Tank with Separator  
Calculation Method : RVP Distillation  
Control Efficiency : 95.0%  
Known Separator Stream : Low Pressure Oil  
Entering Air Composition : No

Filed Name : OXF-44 Wellpad - Produced Fluid Tanks  
Well Name : PTE for G70 Application  
Well ID : OXF-44 Condensate Sample 5/14/2013  
Date : 2015. 04. 06

\*\*\*\*\*  
\*\*\*\*\*

## \* Data Input

\*

\*\*\*\*\*  
\*\*\*\*\*

Separator Pressure : 415.00[psi g]  
Separator Temperature : 60.00[F]  
Ambient Pressure : 14.70[psi a]  
Ambient Temperature : 55.00[F]  
C10+ SG : 0.8059  
C10+ MW : 164.943

-- Low Pressure Oil

No.	Component	mol %
1	H2S	0.0000
2	O2	0.0000
3	CO2	0.0860
4	N2	0.0000
5	C1	10.7540
6	C2	9.1140
7	C3	8.0330
8	i-C4	2.1420
9	n-C4	5.8590
10	i-C5	3.3660
11	n-C5	3.9850
12	C6	3.4760
13	C7	9.3440
14	C8	9.6700
15	C9	5.5240
16	C10+	23.5290
17	Benzene	0.1590
18	Toluene	0.6780
19	E-Benzene	0.0870
20	Xylenes	0.8530
21	n-C6	3.3190
22	2,2,4-Tri methyl p	0.0220

-- Sales Oil

2015-0406\_EQT\_OXF-44\_G70\_Produced Fluid Tanks.txt

-----  
 Production Rate : 21.6[bbl/day]  
 Days of Annual Operation : 365 [days/year]  
 API Gravity : 59.11  
 Reid Vapor Pressure : 10.60[psi a]  
 -----

\*\*\*\*\*  
 \*\*\*\*\*  
 \* Calculation Results  
 \*  
 \*\*\*\*\*  
 \*\*\*\*\*

-- Emission Summary

Item	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
Page 1-----				E&P TANK
Total HAPs	0.820	0.187	0.041	0.009
Total HC	119.829	27.358	5.991	1.368
VOCs, C2+	98.733	22.542	4.937	1.127
VOCs, C3+	65.286	14.905	3.264	0.745

Uncontrolled Recovery Info.

Vapor	7.6900	[MSCFD]
HC Vapor	7.6700	[MSCFD]
GOR	356.02	[SCF/bbl]

-- Emission Composition

No	Component	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
1	H2S	0.000	0.000	0.000	0.000
2	O2	0.000	0.000	0.000	0.000
3	CO2	0.463	0.106	0.463	0.106
4	N2	0.000	0.000	0.000	0.000
5	C1	21.096	4.816	1.055	0.241
6	C2	33.447	7.636	1.672	0.382
7	C3	34.233	7.816	1.712	0.391
8	i-C4	6.710	1.532	0.336	0.077
9	n-C4	13.746	3.138	0.687	0.157
10	i-C5	4.051	0.925	0.203	0.046
11	n-C5	3.440	0.785	0.172	0.039
12	C6	1.022	0.233	0.051	0.012
13	C7	0.909	0.208	0.045	0.010
14	C8	0.287	0.066	0.014	0.003
15	C9	0.054	0.012	0.003	0.001
16	C10+	0.011	0.003	0.001	0.000
17	Benzene	0.029	0.007	0.001	0.000
18	Toluene	0.034	0.008	0.002	0.000
19	E-Benzene	0.001	0.000	0.000	0.000
20	Xylenes	0.012	0.003	0.001	0.000
21	n-C6	0.745	0.170	0.037	0.009
22	2,2,4-Trimethyl p	0.002	0.000	0.000	0.000
	Total	120.292	27.464	6.015	1.373

-- Stream Data

No.	Component	MW	LP Oil	Flash Oil	Sale Oil	Flash Gas	W&S Gas
Total	Emissions						

2015-0406\_EQT\_OXF-44\_G70\_Produced Fluid Tanks.txt

mol %		mol %	mol %	mol %	mol %	mol %
1 H2S	34.80	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
2 O2	32.00	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
3 CO2	44.01	0.0860	0.0067	0.0000	0.2945	0.1764
0.2839						
4 N2	28.01	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
5 C1	16.04	10.7540	0.2446	0.0000	38.3793	6.4816
35.5008						
6 C2	30.07	9.1140	1.3993	0.0247	29.3931	36.4501
30.0300						
7 C3	44.10	8.0330	3.8600	2.4161	19.0022	40.6837
20.9588						
8 i-C4	58.12	2.1420	1.8061	1.7185	3.0249	4.0410
3.1166						
9 n-C4	58.12	5.8590	5.7117	5.6304	6.2462	7.7850
6.3851						
10 i-C5	72.15	3.3660	4.0792	4.1700	1.4913	1.7629
1.5158						
11 n-C5	72.15	3.9850	5.0194	5.1573	1.2660	1.5021
1.2873						
12 C6	86.16	3.4760	4.6757	4.8437	0.3224	0.3912
0.3286						
13 C7	100.20	9.3440	12.8046	13.2946	0.2473	0.3094
0.2529						
14 C8	114.23	9.6700	13.3229	13.8419	0.0679	0.0880
0.0697						
15 C9	128.28	5.5240	7.6212	7.9194	0.0113	0.0163
0.0118						
16 C10+	164.94	23.5290	32.4794	33.7530	0.0018	0.0027
0.0019						
17 Benzene	78.11	0.1590	0.2158	0.2238	0.0097	0.0120
0.0100						
18 Toluene	92.13	0.6780	0.9322	0.9683	0.0097	0.0124
0.0100						
19 E-Benzene	106.17	0.0870	0.1200	0.1247	0.0003	0.0005
0.0004						
20 Xylenes	106.17	0.8530	1.1764	1.2224	0.0029	0.0038
0.0030						
21 n-C6	86.18	3.3190	4.4946	4.6599	0.2287	0.2802
0.2333						
22 2,2,4-Trimethyl p	114.24	0.0220	0.0302	0.0314	0.0005	0.0006
0.0005						

MW		90.97	113.51	116.39	31.70	40.27
32.48						
Stream Mole Ratio		1.0000	0.7244	0.6971	0.2756	0.0273
0.3029						
Heating Value	[BTU/SCF]				1844.52	2307.85
1886.33						
Gas Gravity	[Gas/Air]				1.09	1.39
1.12						
Bubble Pt. @ 100F	[psia]	444.51	31.48	12.29		

Page 2----- E&P TANK

RVP @ 100F	[psia]	116.27	18.47	10.68
Spec. Gravity @ 100F		0.678	0.714	0.718

2015-0406\_EQT\_OXF-44\_G70\_Produced Fluid Tanks. txt

# 2015-0406\_EQT\_OXF-44\_G70\_Sand Separator Tank.txt

\*\*\*\*\*  
\*\*\*\*\*

## \* Project Setup Information

\*

\*\*\*\*\*  
\*\*\*\*\*

Project File : \\tsclient\Z\Client\EQT Corporation\West Virginia\WV  
Production Wells\153901.0056 WV Wellpads 2015\OXF 44\02 Draft\Attach I - Emission  
Calcs\E&P Tank\2015-0406\_EQT\_OXF-44\_G70\_Sand Separator Tank.ept  
Flowsheet Selection : Oil Tank with Separator  
Calculation Method : RVP Distillation  
Control Efficiency : 95.0%  
Known Separator Stream : Low Pressure Oil  
Entering Air Composition : No

Filed Name : OXF-44 Wellpad - Sand Separator Tank  
Well Name : PTE for G70 Application  
Well ID : OXF-44 Condensate Sample 5/14/2013  
Date : 2015. 04. 06

\*\*\*\*\*  
\*\*\*\*\*

## \* Data Input

\*

\*\*\*\*\*  
\*\*\*\*\*

Separator Pressure : 415.00[psi g]  
Separator Temperature : 60.00[F]  
Ambient Pressure : 14.70[psi a]  
Ambient Temperature : 55.00[F]  
C10+ SG : 0.8059  
C10+ MW : 164.943

-- Low Pressure Oil

No.	Component	mol %
1	H2S	0.0000
2	O2	0.0000
3	CO2	0.0860
4	N2	0.0000
5	C1	10.7540
6	C2	9.1140
7	C3	8.0330
8	i-C4	2.1420
9	n-C4	5.8590
10	i-C5	3.3660
11	n-C5	3.9850
12	C6	3.4760
13	C7	9.3440
14	C8	9.6700
15	C9	5.5240
16	C10+	23.5290
17	Benzene	0.1590
18	Toluene	0.6780
19	E-Benzene	0.0870
20	Xylenes	0.8530
21	n-C6	3.3190
22	2,2,4-Trimethyl p	0.0220

-- Sales Oil



2015-0406\_EQT\_0XF-44\_G70\_Sand Separator Tank.txt

-----  
 Production Rate : 0.1 [bbl/day]  
 Days of Annual Operation : 365 [days/year]  
 API Gravity : 59.11  
 Reid Vapor Pressure : 10.60 [psi a]

\*\*\*\*\*  
 \*\*\*\*\*  
 \* Calculation Results  
 \*  
 \*\*\*\*\*  
 \*\*\*\*\*

-- Emission Summary

Item	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
Page 1-----				E&P TANK
Total HAPs	0.000	0.000	0.000	0.000
Total HC	0.555	0.127	0.028	0.006
VOCs, C2+	0.457	0.104	0.023	0.005
VOCs, C3+	0.302	0.069	0.015	0.003

Uncontrolled Recovery Info.

Vapor	35.6100 x1E-3	[MSCFD]
HC Vapor	35.5100 x1E-3	[MSCFD]
GOR	356.10	[SCF/bbl]

-- Emission Composition

No	Component	Uncontrolled [ton/yr]	Uncontrolled [lb/hr]	Controlled [ton/yr]	Controlled [lb/hr]
1	H2S	0.000	0.000	0.000	0.000
2	O2	0.000	0.000	0.000	0.000
3	CO2	0.002	0.000	0.002	0.000
4	N2	0.000	0.000	0.000	0.000
5	C1	0.098	0.022	0.005	0.001
6	C2	0.155	0.035	0.008	0.002
7	C3	0.158	0.036	0.008	0.002
8	i-C4	0.031	0.007	0.002	0.000
9	n-C4	0.064	0.015	0.003	0.001
10	i-C5	0.019	0.004	0.001	0.000
11	n-C5	0.016	0.004	0.001	0.000
12	C6	0.005	0.001	0.000	0.000
13	C7	0.004	0.001	0.000	0.000
14	C8	0.001	0.000	0.000	0.000
15	C9	0.000	0.000	0.000	0.000
16	C10+	0.000	0.000	0.000	0.000
17	Benzene	0.000	0.000	0.000	0.000
18	Toluene	0.000	0.000	0.000	0.000
19	E-Benzene	0.000	0.000	0.000	0.000
20	Xylenes	0.000	0.000	0.000	0.000
21	n-C6	0.003	0.001	0.000	0.000
22	2,2,4-Trimethyl p	0.000	0.000	0.000	0.000
	Total	0.556	0.127	0.028	0.006

-- Stream Data

No.	Component	MW	LP Oil	Flash Oil	Sale Oil	Flash Gas	W&S Gas
Total	Emissions						

2015-0406\_EQT\_OXF-44\_G70\_Sand Separator Tank.txt

mol %		mol %	mol %	mol %	mol %	mol %
1 H2S	34.80	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
2 O2	32.00	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
3 CO2	44.01	0.0860	0.0067	0.0000	0.2945	0.1764
0.2839						
4 N2	28.01	0.0000	0.0000	0.0000	0.0000	0.0000
0.0000						
5 C1	16.04	10.7540	0.2446	0.0000	38.3793	6.4816
35.5008						
6 C2	30.07	9.1140	1.3993	0.0247	29.3931	36.4501
30.0300						
7 C3	44.10	8.0330	3.8600	2.4161	19.0022	40.6837
20.9588						
8 i-C4	58.12	2.1420	1.8061	1.7185	3.0249	4.0410
3.1166						
9 n-C4	58.12	5.8590	5.7117	5.6304	6.2462	7.7850
6.3851						
10 i-C5	72.15	3.3660	4.0792	4.1700	1.4913	1.7629
1.5158						
11 n-C5	72.15	3.9850	5.0194	5.1573	1.2660	1.5021
1.2873						
12 C6	86.16	3.4760	4.6757	4.8437	0.3224	0.3912
0.3286						
13 C7	100.20	9.3440	12.8046	13.2946	0.2473	0.3094
0.2529						
14 C8	114.23	9.6700	13.3229	13.8419	0.0679	0.0880
0.0697						
15 C9	128.28	5.5240	7.6212	7.9194	0.0113	0.0163
0.0118						
16 C10+	164.94	23.5290	32.4794	33.7530	0.0018	0.0027
0.0019						
17 Benzene	78.11	0.1590	0.2158	0.2238	0.0097	0.0120
0.0100						
18 Tol uene	92.13	0.6780	0.9322	0.9683	0.0097	0.0124
0.0100						
19 E-Benzene	106.17	0.0870	0.1200	0.1247	0.0003	0.0005
0.0004						
20 Xyl enes	106.17	0.8530	1.1764	1.2224	0.0029	0.0038
0.0030						
21 n-C6	86.18	3.3190	4.4946	4.6599	0.2287	0.2802
0.2333						
22 224Tri methyl p	114.24	0.0220	0.0302	0.0314	0.0005	0.0006
0.0005						

MW		90.97	113.51	116.39	31.70	40.27
32.48						
Stream Mole Ratio		1.0000	0.7244	0.6971	0.2756	0.0273
0.3029						
Heating Value	[BTU/SCF]				1844.52	2307.85
1886.33						
Gas Gravi ty	[Gas/Air]				1.09	1.39
1.12						
Bubbl e Pt. @ 100F	[psi a]	444.51	31.48	12.29		

Page 2----- E&P TANK

RVP @ 100F	[psi a]	116.27	18.47	10.68
Spec. Gravi ty @ 100F		0.678	0.714	0.718

2015-0406\_EQT\_OXF-44\_G70\_Sand Separator Tank.txt

**TANKS 4.0.9d**  
**Emissions Report - Detail Format**  
**Tank Identification and Physical Characteristics**

**Identification**

User Identification:	OXF-44
City:	
State:	
Company:	
Type of Tank:	Vertical Fixed Roof Tank
Description:	Liquid Loading parameters for OXF-44 wellpad using OXF-131 atmospheric condensate analysis.

**Tank Dimensions**

Shell Height (ft):	20.00
Diameter (ft):	12.00
Liquid Height (ft) :	20.00
Avg. Liquid Height (ft):	10.00
Volume (gallons):	16,920.59
Turnovers:	774.38
Net Throughput(gal/yr):	13,102,992.00
Is Tank Heated (y/n):	N

**Paint Characteristics**

Shell Color/Shade:	Gray/Light
Shell Condition	Good
Roof Color/Shade:	Gray/Light
Roof Condition:	Good

**Roof Characteristics**

Type:	Cone
Height (ft)	0.00
Slope (ft/ft) (Cone Roof)	0.00

**Breather Vent Settings**

Vacuum Settings (psig):	-0.03
Pressure Settings (psig)	0.70

Meteorological Data used in Emissions Calculations: Elkins, West Virginia (Avg Atmospheric Pressure = 13.73 psia)

# **TANKS 4.0.9d** **Emissions Report - Detail Format** **Liquid Contents of Storage Tank**

## **OXF-44 - Vertical Fixed Roof Tank**

Mixture/Component	Month	Daily Liquid Surf. Temperature (deg F)			Liquid Bulk Temp (deg F)	Vapor Pressure (psia)			Vapor Mol. Weight.	Liquid Mass Fract.	Vapor Mass Fract.	Mol. Weight	Basis for Vapor Pressure Calculations
		Avg.	Min.	Max.		Avg.	Min.	Max.					
Produced Fluid	All	55.41	46.54	64.27	51.30	0.3130	0.2441	0.3992	30.1928			21.58	
2,2,4-Trimethylpentane						0.5211	0.3991	0.6729	114.2300	0.0001	0.0001	114.23	Option 2: A=6.8118, B=1257.84, C=220.74
Benzene						1.0267	0.7943	1.3132	78.1100	0.0003	0.0007	78.11	Option 2: A=6.905, B=1211.033, C=220.79
Butane (-n)						0.4614	0.3889	0.5438	58.1200	0.0037	0.0039	58.12	Option 2: A=5.09536, B=935.86, C=238.73
Decane (-n)						0.0301	0.0245	0.0369	142.2900	0.0858	0.0059	142.29	Option 1: VP50 = .026411 VP60 = .033211
Ethylbenzene						0.0923	0.0669	0.1257	106.1700	0.0002	0.0000	106.17	Option 2: A=6.975, B=1424.255, C=213.21
Heptane (-n)						0.5323	0.4043	0.6943	100.2000	0.0240	0.0292	100.20	Option 3: A=37358, B=8.2585
Hexane (-n)						1.6957	1.3330	2.1360	86.1700	0.0138	0.0533	86.17	Option 2: A=6.876, B=1171.17, C=224.41
Isopentane						9.0329	7.1932	11.0836	72.1500	0.0037	0.0771	72.15	Option 1: VP50 = 7.899 VP60 = 10.005
methane						100.7917	87.8791	115.0985	44.0956	0.0000	0.0069	44.10	Option 2: A=7.3408624923, B=1104.2267744, C=291.70993941
Nonane (-n)						0.0588	0.0475	0.0729	128.2600	0.0270	0.0036	128.26	Option 1: VP50 = .051285 VP60 = .065278
Octane (-n)						0.1303	0.1035	0.1637	114.2300	0.0261	0.0078	114.23	Option 1: VP50 = .112388 VP60 = .145444
Pentane (-n)						6.1673	5.0301	7.5097	72.1500	0.0047	0.0669	72.15	Option 3: A=27691, B=7.558
Propane (-n)						100.7917	87.8791	115.0985	44.0956	0.0015	0.3475	44.10	Option 2: A=7.340862493, B=1104.2267744, C=291.70993941
Toluene						0.2857	0.2141	0.3766	92.1300	0.0019	0.0012	92.13	Option 2: A=6.954, B=1344.8, C=219.48
Water						0.2153	0.1602	0.2863	18.0150	0.8040	0.3953	18.02	Option 1: VP50 = .178 VP60 = .247
Xylene (-o)						0.0601	0.0431	0.0827	106.1700	0.0031	0.0004	106.17	Option 2: A=6.998, B=1474.679, C=213.69

# **TANKS 4.0.9d** **Emissions Report - Detail Format** **Detail Calculations (AP-42)**

## **OXF-44 - Vertical Fixed Roof Tank**

<b>Annual Emission Calculations</b>	
Standing Losses (lb):	15.7400
Vapor Space Volume (cu ft):	1,130.9734
Vapor Density (lb/cu ft):	0.0017
Vapor Space Expansion Factor:	0.0260
Vented Vapor Saturation Factor:	0.8577
<b>Tank Vapor Space Volume:</b>	
Vapor Space Volume (cu ft):	1,130.9734
Tank Diameter (ft):	12.0000
Vapor Space Outage (ft):	10.0000
Tank Shell Height (ft):	20.0000
Average Liquid Height (ft):	10.0000
Roof Outage (ft):	0.0000
<b>Roof Outage (Cone Roof)</b>	
Roof Outage (ft):	0.0000
Roof Height (ft):	0.0000
Roof Slope (ft/ft):	0.0000
Shell Radius (ft):	6.0000
<b>Vapor Density</b>	
Vapor Density (lb/cu ft):	0.0017
Vapor Molecular Weight (lb/lb-mole):	30.1928
Vapor Pressure at Daily Average Liquid Surface Temperature (psia):	0.3130
Daily Avg. Liquid Surface Temp. (deg. R):	515.0759
Daily Average Ambient Temp. (deg. F):	49.0583
Ideal Gas Constant R (psia cuft / (lb-mol-deg R)):	10.731
Liquid Bulk Temperature (deg. R):	510.9683
Tank Paint Solar Absorptance (Shell):	0.5400
Tank Paint Solar Absorptance (Roof):	0.5400
Daily Total Solar Insulation Factor (Btu/sqft day):	1,193.8870
<b>Vapor Space Expansion Factor</b>	
Vapor Space Expansion Factor:	0.0260
Daily Vapor Temperature Range (deg. R):	35.4636
Daily Vapor Pressure Range (psia):	0.1551
Breather Vent Press. Setting Range (psia):	0.7300
Vapor Pressure at Daily Average Liquid Surface Temperature (psia):	0.3130
Vapor Pressure at Daily Minimum Liquid Surface Temperature (psia):	0.2441
Vapor Pressure at Daily Maximum Liquid Surface Temperature (psia):	0.3992
Daily Avg. Liquid Surface Temp. (deg R):	515.0759
Daily Min. Liquid Surface Temp. (deg R):	506.2100
Daily Max. Liquid Surface Temp. (deg R):	523.9417
Daily Ambient Temp. Range (deg. R):	24.1833
<b>Vented Vapor Saturation Factor</b>	
Vented Vapor Saturation Factor:	0.8577
Vapor Pressure at Daily Average Liquid Surface Temperature (psia):	0.3130
Vapor Space Outage (ft):	10.0000
<b>Working Losses (lb):</b>	
Vapor Molecular Weight (lb/lb-mole):	605.5034
Vapor Pressure at Daily Average Liquid Surface Temperature (psia):	30.1928
Annual Net Throughput (gal/yr.):	0.3130
Annual Turnovers:	13,102,992.0000
Turnover Factor:	774.3814
Maximum Liquid Volume (gal):	0.2054
Maximum Liquid Height (ft):	16,920.5925
Tank Diameter (ft):	20.0000
Working Loss Product Factor:	12.0000
Working Loss Product Factor:	1.0000
<b>Total Losses (lb):</b>	
Total Losses (lb):	621.2434



**TANKS 4.0.9d**  
**Emissions Report - Detail Format**  
**Individual Tank Emission Totals**

**Emissions Report for: Annual**

**OXF-44 - Vertical Fixed Roof Tank**

Components	Losses(lbs)		
	Working Loss	Breathing Loss	Total Emissions
Produced Fluid	605.50	15.74	621.24
methane	4.18	0.11	4.29
Propane (-n)	210.44	5.47	215.91
Butane (-n)	2.39	0.06	2.45
Isopentane	46.71	1.21	47.93
Pentane (-n)	40.51	1.05	41.56
Hexane (-n)	32.29	0.84	33.12
2,2,4-Trimethylpentane	0.04	0.00	0.04
Benzene	0.40	0.01	0.41
Heptane (-n)	17.69	0.46	18.15
Toluene	0.75	0.02	0.77
Octane (-n)	4.70	0.12	4.83
Ethylbenzene	0.02	0.00	0.02
Xylene (-o)	0.26	0.01	0.27
Nonane (-n)	2.20	0.06	2.25
Decane (-n)	3.57	0.09	3.66
Water	239.36	6.22	245.58





ATTACHMENT J

**Class I Legal Advertisement**

## **AIR QUALITY PERMIT NOTICE**

### **Notice of Application**

Notice is given that EQT Production has applied to the West Virginia Department of Environmental Protection, Division of Air Quality, for a Class II General Permit (G70-A) for an existing natural gas production wellpad. The facility is located in Doddridge County, West Virginia approximately 9.17 miles Southwest of New Milton, WV at 39.145190, -80.814370.

The applicant estimates that the potential to discharge the following Regulated Air Pollutants will be:

<b>Pollutant</b>	<b>Emissions (tons per year)</b>
NO <sub>x</sub>	7.49
CO	6.29
VOC	40.89
SO <sub>2</sub>	0.04
PM	6.81
Total HAPs	0.77
Carbon Dioxide Equivalents (CO <sub>2</sub> e)	11,795

Written comments will be received by the West Virginia Department of Environmental Protection, Division of Air Quality, 601 57<sup>th</sup> Street, SE, Charleston, WV 25304, for at least 30 calendar days from the date of publication of this notice.

Any questions regarding this permit application should be directed to the DAQ at (304) 926-0499, extension 1227, during normal business hours.

Dated this the **XX** day of May, 2015.

By:     EQT Production  
          Kenneth Kirk, Executive Vice President  
          625 Liberty Ave Suite 1700  
          Pittsburgh, PA 15222

ATTACHMENT K

Electronic Submittal

## ATTACHMENT L

### General Permit Registration Application Fee

## ATTACHMENT M

### Siting Criteria Waiver (*not applicable*)

## ATTACHMENT N

### Material Safety Data Sheet (*not applicable*)



ATTACHMENT O

Emission Summary Sheet

**G70-A EMISSIONS SUMMARY SHEET**

Emission Point ID No.	Emission Point Type <sup>1</sup>	Emission Unit Vented Through This Point		Air Pollution Control Device		All Regulated Pollutants - Chemical Name/CAS <sup>2</sup>  (Speciate VOCs & HAPs)	Maximum Potential Uncontrolled Emissions <sup>3</sup>		Maximum Potential Controlled Emissions <sup>4</sup>		Emission Form or Phase  (At exit conditions, Solid, Liquid or Gas/Vapor)	Est. Method Used <sup>5</sup>
		ID No.	Source	ID No.	Device Type		lb/hr	ton/yr	lb/hr	ton/yr		
E001 – E005, E016 – E018 (Total-All Tanks)	Upward vertical stack	S001 – S005, S016 – S018	Produced Fluids Tanks	C001	Combustor	VOC HAPs	119.24 1.50	522.29 6.56	5.96 0.07	26.11 0.33	Gas/Vapor	E&P Tank v2.0
E019	Upward vertical stack	S019	Sand Separator Tank	None	---	VOC HAPS	0.07 <0.01	0.30 <0.01	0.07 <0.01	0.30 <0.01	Gas/Vapor	E&P Tank v2.0
E011 – E014, E020 – E021 (Total – All units)	Upward vertical stack	S011 – S014, S020 – S021	Line Heaters	None	---	NO <sub>x</sub> CO PM/PM <sub>10</sub> /PM <sub>2.5</sub> SO <sub>2</sub> VOC CO <sub>2e</sub> HAPs	0.75 0.63 0.06 <0.01 0.04 1,081 0.01	3.30 2.77 0.25 0.02 0.18 4,735 0.06	0.75 0.63 0.06 <0.01 0.04 1,081 0.01	3.30 2.77 0.25 0.02 0.18 4,735 0.06	Gas/Vapor	AP-42
E015, E022 (Total – All units)	Upward vertical stack	S015, S022	TEGs	None	---	NO <sub>x</sub> CO PM/PM <sub>10</sub> /PM <sub>2.5</sub> SO <sub>2</sub> VOC CO <sub>2e</sub> HAPs	<0.01 <0.01 <0.01 <0.01 <0.01 3 <0.01	0.01 <0.01 <0.01 <0.01 <0.01 13 <0.01	<0.01 <0.01 <0.01 <0.01 <0.01 10 <0.01	0.03 0.03 <0.01 <0.01 <0.01 43 <0.01	Gas/Vapor	AP-42
E023 (Uncaptured - Uncontrolled)	Upward vertical stack	Fugitive	Liquid Loading	None	---	VOC HAPs	0.44 0.01	1.93 0.03	0.13 <0.01	0.58 0.01	Gas/Vapor	AP-42
E023 (Controlled)	Upward vertical stack	S001 – S005, S016 – S018	Liquid Loading	C001	Combustor	VOC HAPs	0.44 0.01	1.93 0.04	0.02 <0.01	0.07 <0.01	Gas/Vapor	AP-42
C001	Upward vertical stack	C001	Combustor	NA	---	NO <sub>x</sub> CO PM/PM <sub>10</sub> /PM <sub>2.5</sub> SO <sub>2</sub> CO <sub>2e</sub>	0.95 0.80 0.07 0.01 1,417	4.18 3.51 0.32 0.03 6,206	0.95 0.80 0.07 0.01 1,417	4.18 3.51 0.32 0.03 6,206	Gas/Vapor	AP-42

The EMISSION SUMMARY SHEET provides a summation of emissions by emission unit. Note that uncaptured process emission unit emissions are not typically considered to be fugitive and must be accounted for on the appropriate EMISSIONS UNIT DATA SHEET and on the EMISSIONS SUMMARY SHEET. Please note that total emissions from the source are equal to all vented emissions, all fugitive emissions, plus all other emissions (e.g. uncaptured emissions). Please complete the FUGITIVE EMISSIONS DATA SUMMARY SHEET for fugitive emission activities.

<sup>1</sup> Please add descriptors such as upward vertical stack, downward vertical stack, horizontal stack, relief vent, rain cap, etc.

<sup>2</sup> List all regulated air pollutants. Speciate VOCs, including all HAPs. Follow chemical name with Chemical Abstracts Service (CAS) number. **LIST** Acids, CO, CS<sub>2</sub>, VOCs, H<sub>2</sub>S, Inorganics, Lead, Organics, O<sub>3</sub>, NO, NO<sub>2</sub>, SO<sub>2</sub>, SO<sub>3</sub>, all applicable Greenhouse Gases (including CO<sub>2</sub> and methane), etc. **DO NOT LIST** H<sub>2</sub>, H<sub>2</sub>O, N<sub>2</sub>, O<sub>2</sub>, and Noble Gases

<sup>3</sup> Give maximum potential emission rate with no control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>4</sup> Give maximum potential emission rate with proposed control equipment operating. If emissions occur for less than 1 hr, then record emissions per batch in minutes (e.g. 5 lb VOC/20 minute batch).

<sup>5</sup> Indicate method used to determine emission rate as follows: MB = material balance; ST = stack test (give date of test); EE = engineering estimate; M = modeling; O = other (specify).