

**STATE OF WEST VIRGINIA
DEPARTMENT OF ENVIRONMENTAL PROTECTION
OFFICE OF OIL & GAS**

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE IN TRIPLICATE, one copy mailed to the Department, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

RECEIVED
Office of Oil & Gas

JUL 16 2012

WV Department of
Environmental Protection

Farm Name: Hiram Lynch Operator Well No.: No.30
 Location: Elevation: 1114' Quadrangle: Wolf Summit 7.5'
 District: Tenmile County: Harrison
 Latitude: _____ Feet South of: _____ Deg. _____ Min. _____ Sec.
 Longitude: _____ Feet West of: _____ Deg. _____ Min. _____ Sec.

Well Type: Oil Gas _____ WIW _____

Company: East Resources Inc. Coal Operator or Owner: NA
P.O. Box 5519
Vienna, WV 26105
 Agent: Philip S. Ondrusek Coal Operator or Owner: _____
 Permit Issued: 4/3/12

AFFIDAVIT

State of West Virginia, County of Wood ss:

Steven Taylor and Jim Lamp being first duly sworn according to law, depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by the above operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 18th day of May, 20 10 and the well was plugged and filled in the following manner:


TYPE	FROM	TO	PIPE REMOVED	LEFT
Cement	2700'	2380'	6 5/8" 80'	1738'
Cement	1900'	1800'	5 3/16" 1866'	0'
Cement	950'	850'		
Cement	440'	322'		
Cement	260'	160'		
Cement	100'	0'		
Perforated 6 5/8" casing 1 shot/20' from 950' - 850', 440' - 340' & 260' - 160'.				
One continuous rip from 370' - 400'				
6% Gel Between Cement Plugs				

Description of monument: 7" x 5' and that the work of plugging and filling said well was completed on the 4th day of June, 20 12

And further deponents saith not. Steven Taylor
James P. Lamp

Sworn and subscribed before me this 28 day of June, 20 12
 My commission expires: Nov. 12, 2018

Notary Public [Signature]
 Affidavit reviewed by the [Signature]
 Office of Oil and Gas:
 Title: oil & gas inspector

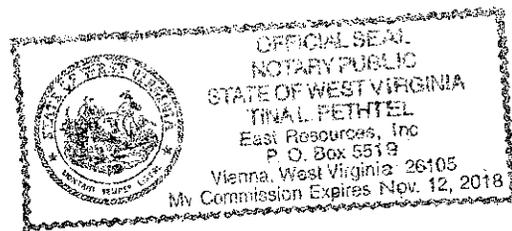

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address

CONSOLIDATION COAL COMPANY
Lease or Property Owner
1 BRIDGE ST. MONONGAH WV 26582
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26582

Complete Address
GLOVER GAP 7.5'

Well Location
MANNINGTON

District
MARION

County

5022

Well No.

CONSOLIDATION COAL COMPANY
Farm

STATE INSPECTOR SUPERVISING PLUGGING William Newcomb 7-13-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MIKE MITCHELL and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 24th day of April, 2012 and that the well was plugged in the following manner:

Formation	Filling Material	Casing Size & Kind	Casing Pulled	Casing Left In
Cleaned 7 7/8" hole through existing 8 5/8" casing from the surface to 1056'. Reduced hole to 6 1/4". Cleaned 6 1/4" hole from 1056' to 1170'. Tagged solid plug at 1170'. Cleaned 7 7/8" hole through Pittsburgh Coal (793' - 799'). Left 170' of 8 5/8" casing in hole from 170' to surface. Possible junk metal remaining through Pittsburgh Coal (793' - 799'). Left 20' of 16" conductor pipe in the hole from 20' to surface.		16" Conductor	0'	20'
		8 5/8" Casing	0'	170'
Cemented hole from 1170' back to surface as follows: From 1170' to 999' with 85 sacks of 35/65 Poz Mix Cement. From 999' to 693' with 132 sacks of Thixotropic Cement w/ green dye. From 693' to surface with 120 sacks of Econofill Cement. A total of 337 sacks of cement were used to fill the hole from 1170' to surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
<u>PITTSBURGH</u>	793' to 799'	77' of 7" casing w/company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

RECEIVED
Office of Oil & Gas
JUL 18 2012
WV Department of
Environmental Protection

... And that the work of plugging and filling said well was completed on the 4th day of May, 2012

And further deponents saith not.

Mike Mitchell
Mike Mitchell


Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 4th day of June, 2012

Jacqueline L. Shriver
Notary Public

My commission expires:

June 1, 2015



Permit No. 47-49-00265-P
Well No. 5022

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address
ALLEGHENY FORESTLAND, LLC.
Lease or Property Owner
3001 EMERSON AVE. PARKERSBURG, WV 26104
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE STREET MONONGAH, WV 26554
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5456
Well No.
ALLEGHENY FORESTLAND, LLC.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William Handcock* 7-13-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

DELBERT MOORE and **KEVIN WRIGHT** being first duty sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 27th day of April, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Removed all 3/4" sucker rod cable from the surface to 2289'. Removed all 2 3/8" tubing from the surface to 2323'. Removed all 5 1/2" casing from the surface to 2272'. Cleaned 6 1/4" hole through existing 7" casing from the surface to 2325'. Cut 7" casing at following depths: 2066', 1966' and 1866'. Cemented bottom hole from 2325' back to 1818' with 111 sacks of Type I cement. Removed 7" casing from surface to 1768'. Left 398' of 7" casing in the hole from 2167' to 2325'. Cleaned 7 7/8" hole through existing 8 5/8" casing from the surface to top of remaining 7" casing at 1768'. Cleaned 6 1/4" hole from 1768' to top of bottom hole plug at 1818'. Removed 8 5/8" casing from the surface to 1287'. Left 367' of 8 5/8" casing in the hole from 1287' to 1654'. Due to extreme loss circulation problems 45' of 13 3/8" casing was run in hole from the surface to 45'. Cleaned 9 7/8" hole through Pittsburgh Coal (1163' - 1172'). Left 20' of 16" conductor pipe in the hole from 20' to surface. Cemented hole from 2325' back to surface as follows: From 2325' to 1818' with 111 sacks of Type I Cement. From 1818' to 1372' with 92 sacks of Super Lite Cement. From 1372' to 1063' with 130 sacks of Super Tropic with white dye. From 1063' to surface with 488 sacks of Super Lite Cement. A total of 710 sacks of cement were used to fill the hole from 2325' back to surface. Cement did circulate at the surface.	16" Conductor	0'	20'	
	13 3/8" Casing	0'	45'	
	8 5/8" Casing	1287'	367'	
	7" Casing	1768'	398'	
	5 1/2" Casing	2272'	0'	
	2 3/8" Tubing	2323'	0'	
	3/4" Cable	2289'	0'	
Coal Seams	Description of Monument	<p>RECEIVED Office of Oil & Gas JUL 18 2012 WV Department of Mental Protection</p>		
<u>Pittsburgh</u>	<u>(1163' - 1172')</u>			
	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.			

... and that the work of plugging and filling said well was completed on the 22nd day of May, 2012

And further deponents saith not.


Delbert Moore
Delbert Moore

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 25th day of June, 2012

My commission expires:

March 18, 2020

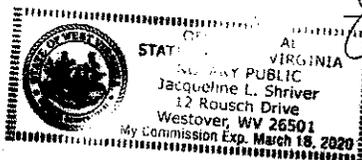

Jacqueline L. Shriver
Notary Public

Permit No. 47-049-01660-P
Well No. 5456

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address
CONSOLIDATION COAL COMPANY
Lease or Property Owner
1 BRIDGE ST. MONONGAH WV 26582
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26582
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5053
Well No.
CONSOLIDATION COAL COMPANY
Farm

STATE INSPECTOR SUPERVISING PLUGGING

[Signature] 7-13-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MIKE MITCHELL and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 17th day of April, 2012 and that the well was plugged in the following manner:

Formation	Filling Material	Casing Size & Kind	Casing Pulled	Casing Left In
Cleaned 12 1/2" hole from the surface to 342'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 342' to 1088'. Reduced hole to 6 1/2". Cleaned 6 1/2" hole from 1088' to 1506'. Tagged solid plug at 1506'. Cleaned 9 7/8" hole through Pittsburgh Coal Seam (679' - 686'). Left 17' of 16" conductor pipe in the hole from 17' to surface.		16" Conductor	0'	17'
Cemented hole from 1506' back to surface as follows: From 1506' to 886' with 218 sacks of Super Lite Cement. From 886' to 579' with 160 sacks of Thixotropic (Super Tropic) Cement w/ white dye. From 579' to surface with 570 sacks of Type I Cement with 1% Calcium Cement. A total of 948 sacks of cement were used to fill the hole from 1506' to surface. Cement did circulate at the surface.				
Coal Seams	Description of Monument			
<u>PITTSBURGH</u>	679' to 686'	77" of 7" casing w/company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

RECEIVED
Office of Oil & Gas
JUL 18 2012
WV Department of
Environmental Protection

... And that the work of plugging and filling said well was completed on the 23rd day of April, 2012

And further deponents saith not.

[Signature]
Mike Mitchell


[Signature]
Kevin S. Wright

Sworn to and subscribed before me this 24th day of June, 2012

[Signature]
Notary Public

My commission expires:

June 1, 2015



Permit No. 47-49-02201-P
Well No. 5053

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Lease or Property Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE STREET MONONGAH, WV 26554
Complete Address

GLOVER GAP 7.5'
Well Location
MANNINGTON
District

MARION
County

5334
Well No.

CONSOLIDATION COAL CO.
Farm

STATE INSPECTOR SUPERVISING PLUGGING [Signature] 7-13-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

DELBERT MOORE and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 21st day of May, 2012 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
	Cleaned 12 1/2" hole from the surface to 255'. Reduced hole to 9 7/8" at 255'. Cleaned 9 7/8" hole from 255' to 1026'. Reduced hole to 7 7/8" at 1026'. Cleaned 7 7/8" hole from 1026' to 1101'. Tagged plug at 1101'. Cleaned 9 7/8" hole through Pittsburgh Coal (801' - 806'). Left 20' of 16" conductor pipe in the hole from 20' to surface.	16" Conductor	0'	20'
	Cemented hole from 1101' back to surface as follows: From 1101' to 701' with 170 sacks of SuperTropic Cement with white dye. From 701' to surface with 280 sacks of Super Lite Cement. A total of 450 sacks of cement were used to fill the hole from 1101' back to surface. Cement did circulate at the surface.			
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	(801' - 806')	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 18 2012
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 11th day of June, 2012

And further deponents saith not.


[Signature]
Delbert Moore

[Signature]
Kevin S. Wright

Sworn to and subscribed before me this 9th day of July 2012

[Signature]
Notary Public

My commission expires:
March 18, 2020

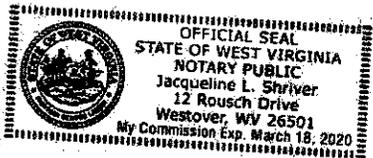

Permit No. 47-049-02208-P
Well No. 5334

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

ALLEGHENY FORESTLAND, LLC.
Lease or Property Owner
3001 EMERSON AVE. PARKERSBURG, WV 26104
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE STREET MONONGAH, WV 26554
Complete Address

GLOVER GAP 7.5'
Well Location
MANNINGTON

District
MARION
County

5459
Well No.

ALLEGHENY FORESTLAND, LLC.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *Delbert Moore* 7-13-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

DELBERT MOORE and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 12th day of April, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Cleaned 12 1/2" hole from surface to 94'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 94' to top of 8 5/8" casing at 1217'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole through 8 5/8" casing from 1217' to 1281'. Bottom of 8 5/8" casing at 1281'. Continued to clean 7 7/8" hole from 1281' to 1293'. Cleaned hole with 3 1/2" drill pipe stinger from 1293' to 1374'. Due to the poor condition of the 8 5/8" casing in the hole the original total depth at 1374' could not be reached. Left 64' of 8 5/8" casing in the hole from 1217' to 1281'. Set bottom hole plug from 1293' to 1228' with 30 sacks of Super Lite Cement. Tagged top of bottom hole plug at 1228'. Cleaned 9 7/8" hole through the Pittsburgh Coal (1012' - 1017'). Left 20' of 16" conductor pipe in the hole from 20' to surface.		16" Conductor	0'	20'
		8 5/8" Casing	0'	64'
Gelled/Cemented hole from 1374' back to surface as follows: From 1374' to 1293' with 9.6ppg Aquagel. From 1293' to 1228' with 30 sacks of Super Lite Cement. From 1228' to 912' with 150 sacks of SuperTropic Cement with white dye. From 912' to surface with 360 sacks of Super Lite Cement. A total of 3.36 bbl of Aquagel and 540 sacks of cement were used to fill the hole from 1374' back to surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	<u>(1012' - 1017')</u>	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 18 2012
WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 25th day of April, 2012

And further deponents saith not.


Delbert Moore
Delbert Moore

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 25th day of June, 2012

My commission expires:

March 18, 2020

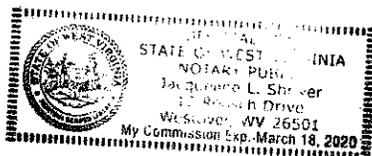

Jacqueline L. Shriver
Notary Public

Permit No. 47-049-02212-P
Well No. 5459

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE ST. MONONGAH WV 26582
Address

CONSOLIDATION COAL COMPANY
Lease or Property Owner
1 BRIDGE ST. MONONGAH WV 26582
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE ST. MONONGAH, WV 26582
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5021
Well No.
CONSOLIDATION COAL COMPANY
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William H. ...* 7-13-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

MIKE MITCHELL and KEVIN S. WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 7th day of May, 2012 and that the well was plugged in the following manner:

Formation	Filling Material	Casing Size & Kind	Casing Pulled	Casing Left In
	Cleaned hole with a 12 1/4" bit from the surface to 296'. Reduced hole to 9 7/8". Cleaned 9 7/8" hole from 296' to 1195'. Reduced hole to 7 7/8". Cleaned 7 7/8" hole from 1195' to 1242'. Reduced hole to 6 1/4". Cleaned 6 1/4" hole from 1242' to 1245'. Tagged plug at 1245'. Cleaned 9 7/8" hole through Pittsburgh Coal (880' - 887'). Possible junk metal remaining through Pittsburgh Coal seam. Left 14' of 16" conductor pipe in the hole from 14' to surface.	16" Conductor	0'	14'
	Cemented hole from 1245' back to surface as follows: From 1245' to 1087' with 70 sacks of 35/65 Poz Mix Cement. From 1087' to 780' with 130 sacks of Thixotropic Cement w/ green dye. From 780' to surface with 275 sacks of Econofill Cement. A total of 475 sacks of cement were used to fill the hole from 1245' to surface. Cement did circulate at the surface.			
Coal Seams		Description of Monument		
<u>PITTSBURGH</u>	880' to 887'	77" of 7" casing w/company name, well number, permit number and date cemented stated on 7"		
(Name)		casing. Well marker will be attached to the		
(Name)		cement plug at ground level.		

... And that the work of plugging and filling said well was completed on the 17th day of May, 2012

And further deponents saith not.

Mike Mitchell
Mike Mitchell


Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 12th day of July, 2012

Jacqueline Ashburn
Notary Public

My commission expires:

March 18, 2020



Permit No. 47-49-02213-P
Well No. 5021

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address
CONSOLIDATION COAL CO.
Coal Operator or Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address
CONSOLIDATION COAL CO.
Lease or Property Owner
1 BRIDGE STREET MONONGAH, WV 26554
Address

CONSOLIDATION COAL CO.
Name of Well Operator
1 BRIDGE STREET MONONGAH, WV 26554
Complete Address
GLOVER GAP 7.5'
Well Location
MANNINGTON
District
MARION
County
5104
Well No.
CONSOLIDATION COAL CO.
Farm

STATE INSPECTOR SUPERVISING PLUGGING *William Handley* 7-18-12

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

DELBERT MOORE and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 23rd day of May, 2012 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Removed all 5 1/2" casing from the surface to 2491'. Cleaned 6 1/2" hole through existing 7" casing from the surface to original total depth at 2524'. Cut 7" casing at the following depths; 2090', 1990', 1890', 1790', 1690', 1590', 1490', 1390', 1290' and 1190'. Cemented bottom hole from 2524' back to 1185' with 285 sacks of Class A Cement w/ 1% Calcium Chloride. Removed 7" casing from the surface to 1073'. Left 1118' of 7" casing in the hole from 1073' to 2191'. Cleaned 12 1/4" hole from the surface to 318'. Reduced hole to 9 7/8" at 318'. Cleaned 9 7/8" hole from 318' to top of 7" casing at 1073'. Reduced hole to 6 1/2" at 1073'. Cleaned 6 1/2" hole from 1073' to top of bottom hole plug at 1185'. Cleaned 9 7/8" hole through Pittsburgh Coal (921' - 928'). Left 20' of 16" conductor pipe in the hole from 20' to surface. Cemented hole from 2524' back to surface as follows: From 2524' to 1185' with 285 sacks of Class A Cement w/ 1% Calcium Chloride. From 1185' to 821' with 130 sacks of SuperTropic Cement with white dye. From 821' to surface with 440 sacks of Super Lite Cement. A total of 855 sacks of cement were used to fill the hole from 2524' back to surface. Cement did circulate at the surface.	16" Conductor 7" Casing 5 1/2" Casing	0' 1073' 2491'	20' 1118' 0'	
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	<u>(921' - 928')</u>	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 18 2012
WV Department of
Environmental Protection

... and that the work of plugging and filling said well was completed on the 7th day of June, 2012


And further deponents saith not.

Delbert Moore
Delbert Moore
Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 25th day of June, 2012

Jacqueline L. Shriver
Notary Public

My commission expires:
March 18, 2020



Permit No. 47-049-02218-P
Well No. 5104

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Name of Well Operator
RD 4 BOX 425 MOUNDSVILLE, WV 26041

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

Complete Address
MAJORSVILLE, WV 7.5

THOMAS H. & ROSALIE ELLIOT
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

Well Location
WEBSTER
District
MARSHALL
County
SGW-93
Well No.
ELLIOT, THOMAS H. & ROSALIE
Farm

RAYMOND RIGGLE
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

STATE INSPECTOR SUPERVISING PLUGGING _____

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

ROBERT STEEL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 4th day of June, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In
Removed all 4 1/2" casing from the surface to 1360'. Cleaned 7 7/8" hole through existing 8 5/8" from the surface to 1360'. Cut 8 5/8" casing at 1050', 900' and 850'. Cemented Bottom Hole from 1360' to 900' with 105 sacks of Expandable Cement with a Gas Blocker additive. Removed 775' of 8 5/8" casing from the surface to 775'. Left 387' of 8 5/8" casing in the hole from 775' to 1162'. Removed 10 1/2" casing from the surface to 573'. Left 28' of 10 1/2" casing in the hole from 573' to 601'. Cleaned 12 1/2" hole through Pittsburgh Coal (562' - 568'). Cleaned 7 7/8" hole from 573' to top of bottom hole plug at 900'. Left 20' of 16" conductor pipe in the hole from 20' to surface.		16" Conductor	0'	20'
		10 1/2" Casing	573'	28'
		8 5/8" Casing	775'	387'
		4 1/2" Casing	1360'	0'
Cemented hole from 1360' to surface as follows: From 1360' to 900' with 105 sacks of Expandable Cement with a Gas Blocker additive. From 900' to 768' with Expandable Cement. From 768' to 462' with 240 sacks of Thixotropic Cement with green dye. From 462' to surface with Expandable Cement. A total of 625 sacks of cement were used to fill the hole from 1360' to surface.				
Coal Seams		Description of Monument		
PITTSBURGH	562' to 568'	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7"		
(Name)		casing. Well marker will be attached to the		
(Name)		cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 16 2012
WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 15th day of June 2012

And further deponents saith not.


Robert Steel
Robert Steel

Sworn to and subscribed before me this 26th day of June, 2012

Kevin S. Wright
Kevin S. Wright

Jacqueline A. Shriver
Notary Public

My commission expires:
March 18, 2020

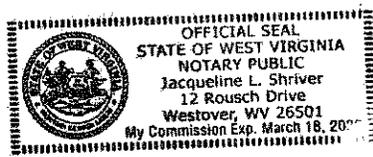

Permit No. 47-051-00196-P
Well No. SGW-93

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Name of Well Operator
RD 4 BOX 425 MOUNDSVILLE, WV 26041

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

Complete Address
MAJORSVILLE, WV 7.5

Address
THOMAS H. & ROSALIE ELLIOT
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033

Well Location
WEBSTER
District
MARSHALL
County
SGW-89
Well No.
ELLIOT, THOMAS H. & ROSALIE
Farm

Address
RAYMOND RIGGLE
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

STATE INSPECTOR SUPERVISING PLUGGING _____

RECEIVED
Office of Oil & Gas

AFFIDAVIT

JUL 16 2012

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

ROBERT STEEL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 4th day of May, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In	
Cleansed 3 3/4" hole through existing 4 1/2" casing from surface to original depth at 1781'. 4 1/2" casing was cemented to surface. Ran cement bond log on 4 1/2" casing to verify casing was cemented. Shot 4 1/2" casing with six (6) shots at each of the following depths: 1680', 1580', 1480', 1380', 1280', 1180', 1080', and 980'. Section milled a 10' window in 4 1/2" casing from: 1765' and 1775'. Cemented bottom hole from 1781' back to 900' with 60 sacks of Expandable Cement with Gas Blocker Additive. Sand cut 4 1/2", 7", 8 5/8" and 10 3/4" casing at the following depths: 853', 803', 753', 703', 655', 653', 651.5', 650', 648.5', 647', 645', and 595'. Sand cut 4 1/2", 7", 8 5/8" and 10 3/4" casings through Pittsburgh Coal (647' - 653'). Cleansed 3 3/4" hole through Pittsburgh Coal from 647' to 653'. 7", 8 5/8", and 10 3/4" casing depths were taken from original well record. Left 20' of 16" conductor pipe in the hole from 20' to surface.	16" Conductor 10 3/4" Casing 8 5/8" Casing 7" Casing 4 1/2" Casing	0' 0' 0' 0' 0'	20' 681' 1261' 1760' 1781'		
				Cemented hole from 1781' to surface as follows:	
				From 1781' to 900' with 60 sacks of Expandable Cement w/ a Gas Blocker additive. From 853' to 547' with 70 sacks of Thixotropic Cement with green dye. From 548' to surface with 15 sacks of Expandable Cement. A total of 145 sacks of cement were used to fill the hole from 1781' to surface. Cement did circulate at the surface.	
				Coal Seams	Description of Monument
PITTSBURGH	647' to 653'	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.			

... and that the work of plugging and filling said well was completed on the 21st day of May 2012


And further deponents saith not.

Robert Steel
Robert Steel

Sworn to and subscribed before me this 4th day of June, 2012

Kevin S. Wright
Kevin S. Wright

My commission expires:
March 18, 2020



Jacqueline E. Shriver
Notary Public
Permit No. 47-051-00202-P
Well No. SGW-89

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Name of Well Operator
RD 4 BOX 425 MOUNDSVILLE, WV 26041

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

Complete Address
MAJORSVILLE, WV 7.5

THOMAS H. & ROSALIE ELLIOT
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

Well Location
WEBSTER
District

RAYMOND RIGGLE
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

MARSHALL
County

RAYMOND RIGGLE
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

SGW-92
Well No.

RAYMOND RIGGLE
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

ELLIOT, THOMAS H. & ROSALIE
Farm

STATE INSPECTOR SUPERVISING PLUGGING *[Signature]*

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

ROBERT STEEL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 29th day of March, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In
Cleaned 3 5/8" hole from the surface to 1762'. Ran cement bond log on 4 1/2" casing. Cement bond log indicated that the 4 1/2" casing was cemented in the hole from 1755' to 1300'. Removed 4 1/2" casing from the surface to 1269'. Left 486' of 4 1/2" casing in the hole from 1755' to 1269'. Perforated remaining 4 1/2" casing w/ 6 shots at each of the following depths; 1650', 1550', 1450' and 1350'. Section milled a 12' window in 4 1/2" casing from 1715' to 1727'. Cemented bottom hole from 1762' to 1250' with 40 sacks of Expandable Cement w/ a Gas Blocker additive. Simultaneously removed 7" and 8 5/8" casing from the surface to 624' due to a strong cement bond. Left 1052' of 7" casing in the hole from 624' to 1676'. Left 401' of 8 5/8" casing in the hole from 624' to 1215'. Cut remaining 7" and 8 5/8" casings at the following depths; 1015', 792', 729' and 681'. Ran cement bond log on 10 3/4" casing. Cement bond log indicated that the 10 3/4" casing was cemented to surface. Left 10 3/4" casing in the hole from the surface to 595'. Section milled a 21' window in 10 3/4" casing from 556' to 577'. Cut remaining 10 3/4" casing at the following depths; 445', 350', 232' and 112'. Section milled 10 3/4" casing through Pittsburgh Coal (563' - 569'). Left 20' of 16" conductor pipe in the hole from 20' to surface Cemented hole from 1762' to surface as follows: From 1762' to 1250' with 40 sacks of Expandable Cement w/ a Gas Blocker additive. From 1250' to 769' w/ 70 sacks of Expandable Cement. From 769' to 463' w/ 115 sacks of Thixotropic Cement with green dye. From 463' to surface w/ 145 sacks Expandable Cement. A total of 370 sacks of cement were used to fill the hole from 1762' to surface.	16" Conductor	0'	20'	
		10 3/4" Casing	Sec. Milled	574'
		8 5/8" Casing	624'	401'
		7" Casing	624'	1052'
		4 1/2" Casing	1269'	486'
Coal Seams	Description of Monument			
<u>PITTSBURGH</u> (Name) (Name)	563' to 569'	77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 16 2012
WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 18th day of April 2012

And further deponents saith not.


[Signature]
Robert Steel

Sworn to and subscribed before me this 30th day of April, 2012

[Signature]
Kevin S. Wright

[Signature]
Notary Public

My commission expires:
March 18, 2020



Permit No. 47-051-00223-P
Well No. SGW-92

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Name of Well Operator
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Complete Address

CONSOLIDATION COAL COMPANY- OHIO VALLEY OPERATIONS
Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

MAJORSVILLE, WV 7.5
Well Location

THOMAS H. & ROSALIE ELLIOT
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

WEBSTER
District

RAYMOND RIGGLE
Lease or Property Owner
RR 4 BOX 267 CAMERON, WV 26033
Address

MARSHALL
County

SGW-90
Well No.

ELLIOT, THOMAS H. & ROSALIE
Farm

ELLIOT, THOMAS H. & ROSALIE
Farm

STATE INSPECTOR SUPERVISING PLUGGING *[Signature]*

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

ROBERT STEEL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 19th day of April, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In
Cleansed 6 1/2" hole through existing 7" casing from the surface to original total depth at 1842'. Ran cement bond log on 7" casing from the surface to 1749'. Bond log indicated that the 7" casing was cemented in the hole from 1749' to surface. Left 1749' of 7" casing in the hole from 1749' to surface. Section milled an 8' window in 7" casing from 1130' to 1138'. Perforated remaining 7" casing w/ 6 shots at each of the following depths; 1650', 1550', 1450', 1350', 1250', 1050' and 950'. Cut remaining 7" casing at the following depths; 883', 788', 738', and 700', 385', 135' and 73'. Left 689' of 8 5/8" casing in the hole from 689' to surface. Cut 8 5/8" casing in conjunction with cuts made in the 7" casing at 385', 135' and 73'. Cemented bottom hole from 1842' to 838' with 115 sacks of Expandable Cement w/ a Gas Blocker additive. Left 659' of 10 3/4" casing in the hole from 659' to surface. 8 5/8" and 10 3/4" casing depths were taken from original well record. Sand cut remaining 7", 8 5/8" and 10 3/4" casings at the following depths; 640', 638', 636.5', 635', 633.5', 632.5', 630.5' and 580'. Sand cut 7", 8 5/8" and 10 3/4" casing through Pittsburgh Coal (632' - 638'). Left 20' of 16" conductor pipe in the hole from 20' to surface. Cemented hole from 1842' to surface as follows: From 1842' to 838' with 115 sacks of Expandable Cement w/ a Gas Blocker additive. From 838' to 532' with 85 sacks of Thixotropic Cement with green dye. From 532' to surface with Expandable Cement. A total of 270 sacks of cement were used to fill the hole from 1842' to surface.	16" Conductor	0'	20'	
		10 3/4" Casing	0'	659'
		8 5/8" Casing	0'	689'
		7" Casing	0'	1749'
Coal Seams	Description of Monument			
<u>PITTSBURGH</u>	632' to 638'	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

RECEIVED
Office of Oil & Gas

JUL 16 2012

WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 3rd day of May 2012


And further deponents saith not.

[Signature: Robert Steel]
Robert Steel

Sworn to and subscribed before me this 24th day of May 2012 *[Signature: Kevin S. Wright]*
Kevin S. Wright

[Signature: Jacqueline J. Shue]
Notary Public

Permit No. 47-051-00288-P
Well No. SGW-90

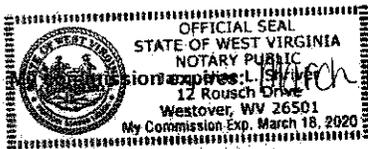

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOLIDATION COAL COMPANY- RIVER OPERATIONS

Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

CONSOLIDATION COAL COMPANY- RIVER OPERATIONS

Coal Operator or Owner
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Address

CONSOLIDATION COAL CO.
Lease or Property Owner
1000 CONSOL ENERGY DRIVE CANONSBURG, PA 15317
Address

CONSOLIDATION COAL COMPANY- RIVER OPERATIONS

Name of Well Operator
RD 4 BOX 425 MOUNDSVILLE, WV 26041
Complete Address

MAJORSVILLE, WV 7.5

Well Location

WEBSTER

District

MARSHALL

County

SGW-101

Well No.

CONSOLIDATION COAL CO.
Farm

STATE INSPECTOR SUPERVISING PLUGGING

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

ROBERT STEEL and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consolidation Coal Company well operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 22nd day of May, 2012 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Plugs Used Size & Kind	Casing Pulled	Casing Left In
Formation				
	Cleaned 3 5/8" hole from the surface to 1809'. Bottom of 4 1/2" casing at 1760'. Ran cement bond log on 4 1/2" casing. Cement bond log indicated that the 4 1/2" casing was cemented in the hole from 1760' to surface. Left 1760' of 4 1/2" casing in the hole from 1760' to surface. Perforated remaining 4 1/2" casing w/ 6 shots at each of the following depths; 1650', 1550', 1450', 1350', 1250', 1150', 1050' and 950'. Cemented bottom hole from 1809' to 900' with 70 sacks of Expandable Cement w/ a Gas Blocker additive. Left an unknown amount of 7" casing in the hole from the surface to an unknown depth. Left an unknown amount of 8 5/8" casing in the hole from the surface to an unknown depth. Sand cut 4 1/2", 7", 8 5/8" and 10 3/4" casings at the following depths; 855', 805', 755', 705', 657', 655', 653.5', 652', 650.5', 649', 647' and 597'. Sand cut 4 1/2", 7", 8 5/8" and 10 3/4" casing through the Pittsburgh Coal (649' - 655'). Left 20' of 16" conductor pipe in the hole from 20' to surface.	16" Conductor 10 3/4" Casing 8 5/8" Casing 7" Casing 4 1/2" Casing	0' 0' 0' 0' 0'	20' Unknown Unknown Unknown 1760'
	Cemented hole from 1809' to surface as follows: From 1809' to 900' with 70 sacks of Expandable Cement w/ a Gas Blocker additive. From 900' to 549' w/ 70 sacks of Thixotropic Cement with green dye. From 549' to surface w/ 20 sacks Expandable Cement. A total of 160 sacks of cement were used to fill the hole from 1809' to surface. Cement did circulate at the surface.			
Coal Seams		Description of Monument		
<u>PITTSBURGH</u>	649' to 655'	77" of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		
(Name)				
(Name)				
(Name)				

... and that the work of plugging and filling said well was completed on the 1st day of June 2012

And further deponents saith not.


Robert Steel
Robert Steel

Sworn to and subscribed before me this 25th day of June, 2012

Kevin S. Wright
Kevin S. Wright

Angeline D. Shriver
Notary Public

My commission expires:
March 18, 2020



Permit No. 47-051-00651-P
Well No. SGW-101

RECEIVED
Office of Oil & Gas

JUL 16 2012

WV Department of
Energy, Mineral & Natural Resources

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOL PENNSYLVANIA COAL CO, LLC.
Coal Operator or Owner
1525 PLEASANT GROVE RD. CLAYSVILLE, PA 15323
1000 CONSOL ENERGY DRIVE CANONSBURG, PA 15317
Address

CONSOL PENNSYLVANIA COAL CO, LLC.
Coal Operator or Owner
1525 PLEASANT GROVE RD. CLAYSVILLE, PA 15323
1000 CONSOL ENERGY DRIVE CANONSBURG, PA 15317
Address

RANDY & REDDA WHYTE
Lease or Property Owner
RR 3 BOX 277B, CAMERON, WV 26033
Address

CONSOL PENNSYLVANIA COAL CO, LLC.
Name of Well Operator
192 CRABAPPLE ROAD WIND RIDGE, PA 15380
Complete Address

CAMERON, WV 7.5'
Well Location
CAMERON
District
MARSHALL
County
5041
Well No.
WHYTE, RANDY & REDDA
Farm

STATE INSPECTOR SUPERVISING PLUGGING _____

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

RUSSELL SMALLWOOD and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consol Pennsylvania Coal Company, LLC. Well Operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 1st day of May, 2012 and that the well was plugged in the following manner:

Sand or Zone Record Formation	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Cleaned 7 7/8" hole from surface to 1204'. Tagged 7" casing at 1204'. Cleaned 6 1/4" hole from 1204' to 1763'. Tagged solid plug at 1763'. Removed 200' of 7" casing from 1204' to 1404'. Cut remaining 7" casing at 1598'. Left an unknown amount of 7" casing in the hole from 1404' to an unknown depth. Cemented bottom hole with 110 sacks of Expandable Cement from 1763' to 1372'. Removed 1073' of 8 5/8" casing from 17' to 1090'. Left 145' of 8 5/8" casing in the hole from 1090' to 1235'. Cut remaining 8 5/8" casing at 1145'. Cleaned 12 1/4" hole from the surface to 216'. Cleaned 9 7/8" hole from 216' to 1090'. Cleaned 7 7/8" hole from 1090' to top of bottom hole plug at 1372'. Cleaned 9 7/8" hole through Pittsburgh Coal (833' - 839'). Left 15' of 16" conductor pipe in the hole from 15' to surface. Cemented hole from 1763' back to 731' as follows: From 1763' to 1372' with 110 sacks of Expandable Cement. From 1372' to 1040' with 105 sacks of Expandable Cement. From 1040' to 730' with 215 sacks of Thixotropic Cement with green dye. A total of 430 sacks of cement were used to fill the hole from 1732' to 731'. Remaining well bore was then converted into a De-Gasification hole from 731' to surface.		16" Conductor	0'	15'
		8 5/8" Casing	1073'	145'
		7" Casing	200'	Unknown
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	<u>(833' - 839')</u>	77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 16 2012
WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 11th day of May, 2012

And further deponents saith not.


Russell Smallwood
Russell Smallwood

Kevin S. Wright
Kevin S. Wright

Sworn to and subscribed before me this 11th day of June 2012

Josephine L. Shriver
Notary Public

My commission expires:



Permit No. 47-51-01513-P
Well No. 5041

AFFIDAVIT OF PLUGGING AND FILLING WELL

AFFIDAVIT SHOULD BE MADE IN TRIPPLICATE, one copy mailed to the Division, one copy to be retained by the Well Operator and the third copy (and extra copies if required) should be mailed to each coal operator at their respective addresses.

CONSOL PENNSYLVANIA COAL CO, LLC.
Coal Operator or Owner
1525 PLEASANT GROVE RD. CLAYSVILLE, PA 15323
1000 CONSOL ENERGY DRIVE CANONSBURG, PA 15317
Address

CONSOL PENNSYLVANIA COAL CO, LLC.
Coal Operator or Owner
1525 PLEASANT GROVE RD. CLAYSVILLE, PA 15323
1000 CONSOL ENERGY DRIVE CANONSBURG, PA 15317
Address

VIOLETTA MATTHEWS
Lease or Property Owner
2421 4th STREET MOUNDSVILLE, WV 26041
Address

CONSOL PENNSYLVANIA COAL CO, LLC.
Name of Well Operator
192 CRABAPPLE ROAD WIND RIDGE, PA 15380
Complete Address
CAMERON, WV 7.5'
Well Location
CAMERON
District
MARSHALL
County
5042
Well No.
MATTHEWS, VIOLETTA
Farm

STATE INSPECTOR SUPERVISING PLUGGING *[Signature]*

AFFIDAVIT

STATE OF WEST VIRGINIA,
County of MONONGALIA ss:

RUSSELL SMALLWOOD and KEVIN WRIGHT being first duly sworn according to law depose and say that they are experienced in the work of plugging and filling oil and gas wells and were employed by Consol Pennsylvania Coal Company, LLC. Well Operator, and participated in the work of plugging and filling the above well, that said work was commenced on the 16th day of May, 2012 and that the well was plugged in the following manner:

Sand or Zone Record	Filling Material	Casing/Tubing Size	Casing Pulled	Casing Left In
Formation				
Cleaned 12 3/4" hole from the surface to top of 10 3/4" casing at 698'. Reduced hole to 9 7/8" at 698'. Cleaned 9 7/8" hole from 698' to 1416'. Reduced hole to 7 7/8" at 1416'. Cleaned 7 7/8" hole from 1416' to 1452'. Reduced hole to 6 3/4" at 1452'. Cleaned 6 3/4" hole from 1452' to 2128'. Tagged plug at 2128'. Cemented bottom hole plug from 2128' to 1116' with 300 sacks of Expandable Cement. Removed all 10 3/4" casing from 698' to 916'. Cleaned 12 3/4" hole through Pittsburgh Coal (908' - 916'). Left 20' of 16" conductor pipe in the hole from 20' to surface.	16" Conductor 10 3/4" Casing	0' 218'	20' 0'	
Cemented hole from 2128' back to surface as follows: From 2128' to 1116' with 300 sacks of Expandable Cement. From 1116' to 808' with 190 sacks of Thixotropic Cement with green dye. From 808' to surface with 490 sacks of Expandable Cement. A total of 980 sacks of cement were used to fill the hole from 2128' to surface. Cement did circulate at the surface.				
Coal Seams		Description of Monument		
<u>Pittsburgh</u>	(908' - 916')	77' of 7" casing w/ company name, well number, permit number and date cemented stated on 7" casing. Well marker will be attached to the cement plug at ground level.		

RECEIVED
Office of Oil & Gas
JUL 16 2012
WV Department of Environmental Protection

... and that the work of plugging and filling said well was completed on the 1st day of June, 2012

And further deponents saith not.

[Signature]
Russell Smallwood


[Signature]
Kevin S. Wright

Sworn to and subscribed before me this 26th day of June, 2012

[Signature]
Notary Public

My commission expires:

March 18, 2020



Permit No. 47-51-01514-P
Well No. 5042

